

## **Programming Languages — C++ Extensions for Ranges**

Langages de programmation — Extensions C++ pour les «ranges»

### **Warning**

This document is not an ISO International Standard. It is distributed for review and comment. It is subject to change without notice and may not be referred to as an International Standard.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Document type: Proposed Draft Technical Specification

Document stage: (30) Committee

Document Language: E

©ISO 2016

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requestor.

ISO copyright office  
Case postale 56 · CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

<b>Contents</b>	<b>iii</b>
<b>List of Tables</b>	<b>v</b>
<b>1 General</b>	<b>1</b>
1.1 Scope . . . . .	1
1.2 References . . . . .	2
1.3 Implementation compliance . . . . .	2
1.4 Namespaces, headers, and modifications to standard classes . . . . .	2
<b>2 Statements</b>	<b>4</b>
2.1 Iteration statements . . . . .	4
<b>3 Library introduction</b>	<b>6</b>
3.1 General . . . . .	6
3.2 Definitions . . . . .	6
3.3 Method of description (Informative) . . . . .	6
3.4 Library-wide requirements . . . . .	8
<b>4 Concepts library</b>	<b>11</b>
4.1 General . . . . .	11
4.2 Core language concepts . . . . .	12
4.3 Comparison concepts . . . . .	16
4.4 Object concepts . . . . .	19
4.5 Callable concepts . . . . .	21
<b>5 General utilities library</b>	<b>24</b>
5.1 General . . . . .	24
5.2 Utility components . . . . .	24
5.3 Function objects . . . . .	26
5.4 Metaprogramming and type traits . . . . .	29
5.5 Tagged tuple-like types . . . . .	34
<b>6 Iterators library</b>	<b>40</b>
6.1 General . . . . .	40
6.2 Iterator requirements . . . . .	40
6.3 Indirect callable requirements . . . . .	48
6.4 Common algorithm requirements . . . . .	50
6.5 Header <code>&lt;experimental/ranges/iterator&gt;</code> synopsis . . . . .	52
6.6 Iterator primitives . . . . .	60
6.7 Iterator adaptors . . . . .	68
6.8 Stream iterators . . . . .	96
6.9 Range concepts . . . . .	104
6.10 Range access . . . . .	108
6.11 Range primitives . . . . .	110
<b>7 Algorithms library</b>	<b>113</b>

7.1	General . . . . .	113
7.2	Tag specifiers . . . . .	133
7.3	Non-modifying sequence operations . . . . .	134
7.4	Mutating sequence operations . . . . .	140
7.5	Sorting and related operations . . . . .	152
7.6	C library algorithms . . . . .	165
<b>8</b>	<b>Numerics library</b>	<b>167</b>
8.1	Uniform random number generator requirements . . . . .	167
<b>A</b>	<b>Compatibility features</b>	<b>168</b>
A.1	Rvalue range access . . . . .	168
A.2	Range-and-a-half algorithms . . . . .	168
<b>B</b>	<b>Acknowledgements</b>	<b>170</b>
<b>C</b>	<b>Compatibility</b>	<b>171</b>
C.1	C++ and Ranges . . . . .	171
C.2	Ranges and the Palo Alto TR (N3351) . . . . .	172
	<b>Bibliography</b>	<b>174</b>
	<b>Index</b>	<b>175</b>
	<b>Index of library names</b>	<b>176</b>

# List of Tables

1	Ranges TS library headers . . . . .	3
2	Library categories . . . . .	6
3	Fundamental concepts library summary . . . . .	11
4	General utilities library summary . . . . .	24
49	Type property predicates . . . . .	30
57	Other transformations . . . . .	32
5	Iterators library summary . . . . .	40
6	Relations among iterator categories . . . . .	40
7	Ranges library summary . . . . .	104
8	Relations among range categories . . . . .	105
9	Algorithms library summary . . . . .	113
10	Header <code>&lt;cstdliblib&gt;</code> synopsis . . . . .	165

# 1 General

[intro]

Naturally the villagers were intrigued and soon a fire was put to the town's greatest kettle as the soldiers dropped in three smooth stones.

"Now this will be a fine soup", said the second soldier; "but a pinch of salt and some parsley would make it wonderful!"

—*Author Unknown*

## 1.1 Scope

[intro.scope]

- <sup>1</sup> This Technical Specification describes extensions to the C++ Programming Language (1.2) that permit operations on ranges of data. These extensions include changes and additions to the existing library facilities as well as the extension of one core language facility. In particular, changes and extensions to the Standard Library include:
- (1.1) — The formulation of the foundational and iterator concept requirements using the syntax of the Concepts TS (1.2).
  - (1.2) — Analogues of the Standard Library algorithms specified in terms of the new concepts.
  - (1.3) — The loosening of the algorithm constraints to permit the use of *sentinels* to denote the end of a range and corresponding changes to algorithm return types where necessary.
  - (1.4) — The addition of new concepts describing *range* and *view* abstractions; that is, objects with a begin iterator and an end sentinel.
  - (1.5) — New algorithm overloads that take range objects.
  - (1.6) — Support of *callable objects* (as opposed to *function objects*) passed as arguments to the algorithms.
  - (1.7) — The addition of optional *projection* arguments to the algorithms to permit on-the-fly data transformations.
  - (1.8) — Analogues of the iterator primitives and new primitives in support of the addition of sentinels to the library.
  - (1.9) — Constrained analogues of the standard iterator adaptors and stream iterators that satisfy the new iterator concepts.
  - (1.10) — New iterator adaptors (`counted_iterator` and `common_iterator`) and sentinels (`unreachable`).
- <sup>2</sup> Changes to the core language include:
- (2.1) — the extension of the range-based `for` statement to support the new iterator range requirements (6.10).
- <sup>3</sup> This paper does not specify constrained analogues of other parts of the Standard Library (e.g., the numeric algorithms), nor does it add range support to all the places that could benefit from it (e.g., the containers).
- <sup>4</sup> This paper does not specify any new range views, actions, or facade or adaptor utilities; all are left as future work.

## 1.2 References

[intro.refs]

- <sup>1</sup> The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

- (1.1) — ISO/IEC 14882:2014, *Programming Languages - C++*
- (1.2) — ISO/IEC TS 19217:2015, *Programming Languages - C++ Extensions for Concepts*
- (1.3) — JTC1/SC22/WG21 N4128, *Ranges for the Standard Library, Revision 1*
- (1.4) — JTC1/SC22/WG21 N3351, *A Concept Design for the STL*

ISO/IEC 14882:2014 is herein called the *C++ Standard*, N3351 is called the “*The Palo Alto*” report, and ISO/IEC TS 19217:2105 is called the *Concepts TS*.

## 1.3 Implementation compliance

[intro.compliance]

- <sup>1</sup> Conformance requirements for this specification are the same as those defined in 1.3 in the C++ Standard. [Note: Conformance is defined in terms of the behavior of programs. — end note]

## 1.4 Namespaces, headers, and modifications to standard classes

[intro.namespaces]

- <sup>1</sup> Since the extensions described in this technical specification are experimental and not part of the C++ standard library, they should not be declared directly within namespace `std`. Unless otherwise specified, all components described in this document either:

- (1.1) — modify an existing interface in the C++ Standard Library in-place,
- (1.2) — are declared in namespace `std::experimental::ranges::v1`.

- <sup>2</sup> The International Standard, ISO/IEC 14882, together with ISO/IEC TS 19217:2015 (the Concepts TS), provide important context and specification for this paper. In places, this document suggests changes to be made to components in namespace `std` in-place. In other places, entire chapters and sections are copied from ISO/IEC 14882 and modified so as to define similar but different components in namespace `std::experimental::ranges::v1`.

- <sup>3</sup> Instructions to modify or add paragraphs are written as explicit instructions. Modifications made to existing text from the International Standard use underlining to represent added text and ~~strikethrough~~ to represent deleted text.

- <sup>4</sup> This paper assumes that the contents of the `std::experimental::ranges::v1` namespace will become a new constrained version of the C++ Standard Library that will be delivered alongside the existing unconstrained version.

- <sup>5</sup> Unless otherwise specified, references to other entities described in this document are assumed to be qualified with `std::experimental::ranges::`, and references to entities described in the International Standard are assumed to be qualified with `std::`.

- <sup>6</sup> New headers are provided in the `<experimental/ranges/>` directory. Where the new header has the same name as an existing header (e.g., `<experimental/ranges/algorithm>`), the new header shall include the existing header as if by

```
#include <algorithm>
```

Table 1 — Ranges TS library headers

<code>&lt;experimental/ranges/algorithm&gt;</code>	<code>&lt;experimental/ranges/random&gt;</code>
<code>&lt;experimental/ranges/concepts&gt;</code>	<code>&lt;experimental/ranges/tuple&gt;</code>
<code>&lt;experimental/ranges/functional&gt;</code>	<code>&lt;experimental/ranges/utility&gt;</code>
<code>&lt;experimental/ranges/iterator&gt;</code>	



## 2 Statements

[stmt]

### 2.1 Iteration statements

[stmt.iter]

#### 2.1.1 The range-based for statement

[stmt.ranged]

[Editor's note: Modify ISO/IEC 14882:2014 §6.5.4/p1 to allow differently typed begin and end iterators, like in C++17.]

<sup>1</sup> For a range-based for statement of the form

```
for ( for-range-declaration : expression ) statement
```

let *range-init* be equivalent to the expression surrounded by parentheses

```
( expression )
```

and for a range-based for statement of the form

```
for ( for-range-declaration : braced-init-list ) statement
```

let *range-init* be equivalent to the *braced-init-list*. In each case, a range-based for statement is equivalent to

```
{
  auto && __range = range-init;
  for ( auto __begin = begin-expr,
        __end = end-expr;
        __begin != __end;
        ++__begin ) {
    for-range-declaration = *__begin;
    statement
  }
}

{
  auto && __range = range-init;
  auto __begin = begin-expr;
  auto __end = end-expr;
  for ( ; __begin != __end; ++__begin ) {
    for-range-declaration = *__begin;
    statement
  }
}
```

where *\_\_range*, *\_\_begin*, and *\_\_end* are variables defined for exposition only, and *\_RangeT* is the type of the expression, and *begin-expr* and *end-expr* are determined as follows:

- (1.1) — if *\_RangeT* is an array type, *begin-expr* and *end-expr* are *\_\_range* and *\_\_range + \_\_bound*, respectively, where *\_\_bound* is the array bound. If *\_RangeT* is an array of unknown size or an array of incomplete type, the program is ill-formed;
- (1.2) — if *\_RangeT* is a class type, the *unqualified-ids* *begin* and *end* are looked up in the scope of class *\_RangeT* as if by class member access lookup (3.4.5), and if either (or both) finds at least one declaration, *begin-expr* and *end-expr* are *\_\_range.begin()* and *\_\_range.end()*, respectively;
- (1.3) — otherwise, *begin-expr* and *end-expr* are *begin(\_\_range)* and *end(\_\_range)*, respectively, where *begin* and *end* are looked up in the associated namespaces (3.4.2). [Note: Ordinary unqualified lookup (3.4.1) is not performed. — end note]

[*Example:*

```
int array[5] = { 1, 2, 3, 4, 5 };  
for (int& x : array)  
    x *= 2;
```

— *end example*]

- <sup>2</sup> In the *decl-specifier-seq* of a *for-range-declaration*, each *decl-specifier* shall be either a *type-specifier* or *constexpr*. The *decl-specifier-seq* shall not define a class or enumeration.

## 3 Library introduction [library]

### 3.1 General [library.general]

- <sup>1</sup> This Clause describes the contents of the *Ranges library*, how a well-formed C++ program makes use of the library, and how a conforming implementation may provide the entities in the library.
- <sup>2</sup> Clause 3.4, Clauses 4 through 8, and Annex A specify the contents of the library, as well as library requirements and constraints on both well-formed C++ programs and conforming implementations.
- <sup>3</sup> Detailed specifications for each of the components in the library are in Clauses 4-8, as shown in Table 2.

Table 2 — Library categories

Clause	Category
4	Concepts library
5	General utilities library
6	Iterators library
7	Algorithms library
8	Numerics library

- <sup>4</sup> The concepts library (Clause 4) describes library components that C++ programs may use to perform compile-time validation of template parameters and perform function dispatch based on properties of types.
- <sup>5</sup> The general utilities library (Clause 5) includes components used by other library elements and components used as infrastructure in C++ programs, such as function objects.
- <sup>6</sup> The iterators library (Clause 6) describes components that C++ programs may use to perform iterations over containers (Clause ISO/IEC 14882:2014 §23), streams (ISO/IEC 14882:2014 §27.7), stream buffers (ISO/IEC 14882:2014 §27.6), and ranges (6.9).
- <sup>7</sup> The algorithms library (Clause 7) describes components that C++ programs may use to perform algorithmic operations on containers (Clause ISO/IEC 14882:2014 §23) and other sequences
- <sup>8</sup> The numerics library (Clause 8) provides concepts that are useful to constrain numeric algorithms.

### 3.2 Definitions [definitions]

- <sup>1</sup> Terms defined in ISO/IEC 14882:2014 §17.3 are used in this document with the same meaning.

### 3.3 Method of description (Informative) [description]

- <sup>1</sup> This subclause describes the conventions used to specify the Ranges library. 3.3.1 describes the structure of the normative Clauses 4 through 8 and Annex A. 3.3.2 describes other editorial conventions.

#### 3.3.1 Structure of each clause [structure]

##### 3.3.1.1 Elements [structure.elements]

- <sup>1</sup> Each library clause contains the following elements, as applicable:<sup>1</sup>

- (1.1) — Summary
- (1.2) — Requirements

---

<sup>1</sup>) To save space, items that do not apply to a Clause are omitted. For example, if a Clause does not specify any requirements, there will be no “Requirements” subclause.

- (1.3) — Detailed specifications

### 3.3.1.2 Summary [structure.summary]

- 1 The Summary provides a synopsis of the category, and introduces the first-level subclauses. Each subclause also provides a summary, listing the headers specified in the subclause and the library entities provided in each header.
- 2 Paragraphs labeled “Note(s):” or “Example(s):” are informative, other paragraphs are normative.
- 3 The contents of the summary and the detailed specifications include:
  - (3.1) — macros
  - (3.2) — values
  - (3.3) — types
  - (3.4) — classes and class templates
  - (3.5) — functions and function templates
  - (3.6) — objects
  - (3.7) — concepts

### 3.3.1.3 Requirements [structure.requirements]

- 1 Requirements describe constraints that shall be met by a C++ program that extends the Ranges library. Such extensions are generally one of the following:
  - (1.1) — Template arguments
  - (1.2) — Derived classes
  - (1.3) — Containers, iterators, and algorithms that meet an interface convention or satisfy a concept
- 2 Interface convention requirements are stated as generally as possible. Instead of stating “class X has to define a member function `operator++()`,” the interface requires “for any object `x` of class X, `++x` is defined.” That is, whether the operator is a member is unspecified.
- 3 Requirements are stated in terms of concepts (Concepts TS [dcl.spec.concept]). Concepts are stated in terms of well-defined expressions that define valid terms of the types that satisfy the concept. For every set of well-defined expression requirements there is a named concept that specifies an initial set of the valid expressions and their semantics. Any generic algorithm (Clause 7) that uses the well-defined expression requirements is described in terms of the valid expressions for its formal type parameters.
- 4 Template argument requirements are sometimes referenced by name. See ISO/IEC 14882:2014 §17.5.2.1.
- 5 In some cases the semantic requirements are presented as C++ code. Such code is intended as a specification of equivalence of a construct to another construct, not necessarily as the way the construct must be implemented.<sup>2</sup>
- 6 Required operations of any concept defined in this document need not be total functions; that is, some arguments to a required operation may result in the required semantics failing to be satisfied. [*Example*: The required `<` operator of the `StrictTotallyOrdered` concept (4.3.4) does not meet the semantic requirements of that concept when operating on NaNs. — *end example*] This does not affect whether a type satisfies the concept.

---

2) Although in some cases the code given is unambiguously the optimum implementation.

- <sup>7</sup> A declaration may explicitly impose requirements through its associated constraints (Concepts TS [temp.constr.decl]). When the associated constraints refer to a concept (Concepts TS [dcl.spec.concept]), additional semantic requirements are imposed on the use of the declaration.
- <sup>8</sup> If the semantic requirements of a declaration are not satisfied at the point of use, the program is ill-formed, no diagnostic required.

### 3.3.1.4 Detailed specifications [structure.specifications]

- <sup>1</sup> The detailed specifications of each entity defined in Clauses 4–8 follows the conventions established by ISO/IEC 14882:2014 §17.5.1.4.

### 3.3.2 Other conventions [conventions]

- <sup>1</sup> This subclause describes several editorial conventions used to describe the contents of the Ranges library. These conventions are for describing member functions (3.3.2.1), private members (3.3.2.2), and customization point objects (3.3.2.3).

#### 3.3.2.1 Functions within classes [functions.within.classes]

- <sup>1</sup> This document follows the same conventions as specified in ISO/IEC 14882:2014 §17.5.2.2.

#### 3.3.2.2 Private members [objects.within.classes]

- <sup>1</sup> This document follows the same conventions as specified in ISO/IEC 14882:2014 §17.5.2.3.

#### 3.3.2.3 Customization Point Objects [customization.point.object]

- <sup>1</sup> A *customization point object* is a function object (5.3) with a literal class type that interacts with user-defined types while enforcing semantic requirements on that interaction.
- <sup>2</sup> The type of a customization point object shall satisfy *Semiregular* (4.4.8).
- <sup>3</sup> All instances of a specific customization point object type shall be equal.
- <sup>4</sup> The type of a customization point object `T` shall satisfy `Invocable<const T, Args...>()` (4.5.2) when the types of `Args...` meet the requirements specified in that customization point object's definition. Otherwise, `T` shall not have a function call operator that participates in overload resolution.
- <sup>5</sup> Each customization point object type constrains its return type to satisfy a particular concept.
- <sup>6</sup> The library defines several named customization point objects. In every translation unit where such a name is defined, it shall refer to the same instance of the customization point object.
- <sup>7</sup> [*Note:* Many of the customization point objects in the library evaluate function call expressions with an unqualified name which results in a call to a user-defined function found by argument dependent name lookup (ISO/IEC 14882:2014 §3.4.2). To preclude such an expression resulting in a call to unconstrained functions with the same name in namespace `std`, customization point objects specify that lookup for these expressions is performed in a context that includes deleted overloads matching the signatures of overloads defined in namespace `std`. When the deleted overloads are viable, user-defined overloads must be more specialized (ISO/IEC 14882:2014 §14.5.6.2) or more constrained (Concepts TS [temp.constr.order]) to be used by a customization point object. — *end note*]

### 3.4 Library-wide requirements [requirements]

- <sup>1</sup> This subclause specifies requirements that apply to the entire Ranges library. Clauses 4 through 8 and Annex A specify the requirements of individual entities within the library.
- <sup>2</sup> Requirements specified in terms of interactions between threads do not apply to programs having only a single thread of execution.

- <sup>3</sup> Within this subclause, 3.4.1 describes the library's contents and organization, 3.4.2 describes how well-formed C++ programs gain access to library entities, 3.4.3 describes constraints on well-formed C++ programs, and 3.4.4 describes constraints on conforming implementations.

### 3.4.1 Library contents and organization [organization]

- <sup>1</sup> 3.4.1.1 describes the entities defined in the Ranges library.

#### 3.4.1.1 Library contents [contents]

- <sup>1</sup> The Ranges library provides definitions for the following types of entities: macros, values, types, templates, classes, functions, objects, concepts.
- <sup>2</sup> All library entities are defined within an inline namespace `v1` within the namespace `std::experimental::ranges` or namespaces nested within namespace `std::experimental::ranges::v1`. It is unspecified whether names declared in a specific namespace are declared directly in that namespace or in an inline namespace inside that namespace.

### 3.4.2 Using the library [using]

#### 3.4.2.1 Overview [using.overview]

- <sup>1</sup> This section describes how a C++ program gains access to the facilities of the Ranges library. 3.4.2.2 describes effects during translation phase 4, while 3.4.2.3 describes effects during phase 8 (ISO/IEC 14882:2014 §2.2).

#### 3.4.2.2 Headers [using.headers]

The entities in the Ranges library are defined in headers, the use of which is governed by the same requirements as specified in ISO/IEC 14882:2014 §17.6.2.2.

#### 3.4.2.3 Linkage [using.linkage]

- <sup>1</sup> Entities in the C++ standard library have external linkage (ISO/IEC 14882:2014 §3.5). Unless otherwise specified, objects and functions have the default `extern "C++"` linkage (ISO/IEC 14882:2014 §7.5).

### 3.4.3 Constraints on programs [constraints]

#### 3.4.3.1 Overview [constraints.overview]

- <sup>1</sup> This section describes restrictions on C++ programs that use the facilities of the Ranges library. The following subclauses specify constraints on the program's use of Ranges library classes as base classes (3.4.3.2) and other constraints.

#### 3.4.3.2 Derived classes [derived.classes]

- <sup>1</sup> Virtual member function signatures defined for a base class in the Ranges library may be overridden in a derived class defined in the program (ISO/IEC 14882:2014 §10.3).

#### 3.4.3.3 Other functions [res.on.functions]

- <sup>1</sup> In certain cases (operations on types used to instantiate Ranges library template components), the Ranges library depends on components supplied by a C++ program. If these components do not meet their requirements, this document places no requirements on the implementation.
- <sup>2</sup> In particular, the effects are undefined if an incomplete type (ISO/IEC 14882:2014 §3.9) is used as a template argument when instantiating a template component or evaluating a concept, unless specifically allowed for that component.

#### 3.4.3.4 Function arguments [res.on.arguments]

- <sup>1</sup> The constraints on arguments passed to C++ standard library function as specified in ISO/IEC 14882:2014 §17.6.4.9 also apply to arguments passed to functions in the Ranges library.

**3.4.3.5 Library object access** [res.on.objects]

- <sup>1</sup> The constraints on object access by C++ standard library functions as specified in ISO/IEC 14882:2014 §17.6.4.10 also apply to object access by functions in the Ranges library.

**3.4.3.6 Requires paragraph** [res.on.required]

- <sup>1</sup> Violation of the preconditions specified in a function's *Requires:* paragraph results in undefined behavior unless the function's *Throws:* paragraph specifies throwing an exception when the precondition is violated.

**3.4.4 Conforming implementations** [conforming]

- <sup>1</sup> The constraints upon, and latitude of, implementations of the Ranges library follow the same constraints and latitudes for implementations of the C++ standard library as specified in ISO/IEC 14882:2014 §17.6.5.

## 4 Concepts library [`concepts.lib`]

### 4.1 General [`concepts.lib.general`]

- <sup>1</sup> This Clause describes library components that C++ programs may use to perform compile-time validation of template parameters and perform function dispatch based on properties of types. The purpose of these concepts is to establish a foundation for equational reasoning in programs.
- <sup>2</sup> The following subclauses describe core language concepts, comparison concepts, object concepts, and function concepts as summarized in Table 3.

Table 3 — Fundamental concepts library summary

Subclause	Header(s)
4.2	Core language concepts < <code>experimental/ranges/concepts</code> >
4.3	Comparison concepts
4.4	Object concepts
4.5	Callable concepts

- <sup>3</sup> The concepts in this Clause are defined in the namespace `std::experimental::ranges::v1`.

#### 4.1.1 Equality Preservation [`concepts.lib.general.equality`]

- <sup>1</sup> An expression is *equality preserving* if, given equal inputs, the expression results in equal outputs. The inputs to an expression are the set of the expression’s operands. The output of an expression is the expression’s result and all operands modified by the expression.
- <sup>2</sup> Not all input values must be valid for a given expression; e.g., for integers `a` and `b`, the expression `a / b` is not well-defined when `b` is 0. This does not preclude the expression `a / b` being equality preserving. The *domain* of an expression is the set of input values for which the expression is required to be well-defined.
- <sup>3</sup> Expressions required by this specification to be equality preserving are further required to be stable: two evaluations of such an expression with the same input objects must have equal outputs absent any explicit intervening modification of those input objects. [*Note*: This requirement allows generic code to reason about the current values of objects based on knowledge of the prior values as observed via equality preserving expressions. It effectively forbids spontaneous changes to an object, changes to an object from another thread of execution, changes to an object as side effects of non-modifying expressions, and changes to an object as side effects of modifying a distinct object if those changes could be observable to a library function via an equality preserving expression that is required to be valid for that object. — *end note*]
- <sup>4</sup> Expressions declared in a *requires-expression* in this document are required to be equality preserving, except for those annotated with the comment “not required to be equality preserving.” An expression so annotated may be equality preserving, but is not required to be so.
- <sup>5</sup> An expression that may alter the value of one or more of its inputs in a manner observable to equality preserving expressions is said to modify those inputs. This document uses a notational convention to specify which expressions declared in a *requires-expression* modify which inputs: except where otherwise specified, an expression operand that is a non-constant lvalue or rvalue may be modified. Operands that are constant lvalues or rvalues must not be modified.
- <sup>6</sup> Where a *requires-expression* declares an expression that is non-modifying for some constant lvalue operand, additional variants of that expression that accept a non-constant lvalue or (possibly constant) rvalue for the given operand are also required except where such an expression variant is explicitly required with



differing semantics. Such implicit expression variants must meet the semantic requirements of the declared expression. The extent to which an implementation validates the syntax of these implicit expression variants is unspecified.

[*Example:*

```
template <class T>
concept bool C() {
    return requires(T a, T b, const T c, const T d) {
        c == d;           // #1
        a = std::move(b); // #2
        a = c;           // #3
    };
}
```

Expression #1 does not modify either of its operands, #2 modifies both of its operands, and #3 modifies only its first operand a.

Expression #1 implicitly requires additional expression variants that meet the requirements for `c == d` (including non-modification), as if the expressions

```
a == d;      a == b;      a == move(b);      a == d;
c == a;      c == move(a); c == move(d);
move(a) == d; move(a) == b; move(a) == move(b); move(a) == move(d);
move(c) == b; move(c) == move(b); move(c) == d;      move(c) == move(d);
```

had been declared as well.

Expression #3 implicitly requires additional expression variants that meet the requirements for `a = c` (including non-modification of the second operand), as if the expressions `a = b` and `a = move(c)` had been declared. Expression #3 does not implicitly require an expression variant with a non-constant rvalue second operand, since expression #2 already specifies exactly such an expression explicitly. — *end example*]

[*Example:* The following type `T` meets the explicitly stated syntactic requirements of concept `C` above but does not meet the additional implicit requirements:

```
struct T {
    bool operator==(const T&) const { return true; }
    bool operator==(T&) = delete;
};
```

`T` fails to meet the implicit requirements of `C`, so `C<T>()` is not satisfied. Since implementations are not required to validate the syntax of implicit requirements, it is unspecified whether or not an implementation diagnoses as ill-formed a program which requires `C<T>()`. — *end example*]

## 4.2 Core language concepts

[`concepts.lib.corelang`]

### 4.2.1 In general

[`concepts.lib.corelang.general`]

<sup>1</sup> This section contains the definition of concepts corresponding to language features. These concepts express relationships between types, type classifications, and fundamental type properties.

### 4.2.2 Concept Same

[`concepts.lib.corelang.same`]

```
template <class T, class U>
concept bool Same() {
    return see below;
}
```

1 Same<T, U>() is satisfied if and only if T and U denote the same type.

2 *Remarks:* For the purposes of constraint checking, Same<T, U>() implies Same<U, T>().

### 4.2.3 Concept DerivedFrom [concepts.lib.corelang.derived]

```
template <class T, class U>
concept bool DerivedFrom() {
    return see below;
}
```

1 DerivedFrom<T, U>() is satisfied if and only if is\_base\_of<U, T>::value is true.

### 4.2.4 Concept ConvertibleTo [concepts.lib.corelang.convertibleto]

```
template <class T, class U>
concept bool ConvertibleTo() {
    return see below;
}
```

1 ConvertibleTo<T, U>() is satisfied if and only if is\_convertible<T, U>::value is true.

### 4.2.5 Concept CommonReference [concepts.lib.corelang.commonref]

1 For two types T and U, if common\_reference\_t<T, U> is well-formed and denotes a type C such that both ConvertibleTo<T, C>() and ConvertibleTo<U, C>() are satisfied, then T and U share a *common reference type*, C. [*Note:* C could be the same as T, or U, or it could be a different type. C may be a reference type. C need not be unique. — *end note*]

```
template <class T, class U>
concept bool CommonReference() {
    return requires(T (&t)(), U (&u)()) {
        typename common_reference_t<T, U>;
        typename common_reference_t<U, T>;
        requires Same<common_reference_t<T, U>,
                    common_reference_t<U, T>>();
        common_reference_t<T, U>(t());
        common_reference_t<T, U>(u());
    };
}
```

2 Let C be common\_reference\_t<T, U>. Let t be a function whose return type is T, and let u be a function whose return type is U. CommonReference<T, U>() is satisfied if and only if:

(2.1) — C(t()) equals C(t()) if and only if t() is an equality preserving expression (4.1.1).

(2.2) — C(u()) equals C(u()) if and only if u() is an equality preserving expression.

3 [*Note:* Users can customize the behavior of CommonReference by specializing the basic\_common\_reference class template (5.4.3). — *end note*]

### 4.2.6 Concept Common [concepts.lib.corelang.common]

1 If T and U can both be explicitly converted to some third type, C, then T and U share a *common type*, C. [*Note:* C could be the same as T, or U, or it could be a different type. C may not be unique. — *end note*]

```
template <class T, class U>
concept bool Common() {
    return CommonReference<const T&, const U&>() &&
        requires(T (&t)(), U (&u)()) {
```

```

typename common_type_t<T, U>;
typename common_type_t<U, T>;
requires Same<common_type_t<U, T>, common_type_t<T, U>>();
common_type_t<T, U>(t());
common_type_t<T, U>(u());
requires CommonReference<add_lvalue_reference_t<common_type_t<T, U>>,
                        common_reference_t<add_lvalue_reference_t<const T>,
                        add_lvalue_reference_t<const U>>>();
};
}

```

2 Let  $C$  be `common_type_t<T, U>`. Let  $t$  be a function whose return type is  $T$ , and let  $u$  be a function whose return type is  $U$ . `Common<T, U>()` is satisfied if and only if:

(2.1) —  $C(t())$  equals  $C(t())$  if and only if  $t()$  is an equality preserving expression (4.1.1).

(2.2) —  $C(u())$  equals  $C(u())$  if and only if  $u()$  is an equality preserving expression (4.1.1).

3 [*Note*: Users can customize the behavior of `Common` by specializing the `common_type` class template (5.4.2). — *end note*]

#### 4.2.7 Concept Integral

[`concepts.lib.corelang.integral`]

```

template <class T>
concept bool Integral() {
    return is_integral<T>::value;
}

```

#### 4.2.8 Concept SignedIntegral

[`concepts.lib.corelang.signedintegral`]

```

template <class T>
concept bool SignedIntegral() {
    return Integral<T>() && is_signed<T>::value;
}

```

1 [*Note*: `SignedIntegral<T>()` may be satisfied even for types that are not signed integral types (ISO/IEC 14882:2014 §3.9.1); for example, `char`. — *end note*]

#### 4.2.9 Concept UnsignedIntegral

[`concepts.lib.corelang.unsignedintegral`]

```

template <class T>
concept bool UnsignedIntegral() {
    return Integral<T>() && !SignedIntegral<T>();
}

```

1 [*Note*: `UnsignedIntegral<T>()` may be satisfied even for types that are not unsigned integral types (ISO/IEC 14882:2014 §3.9.1); for example, `char`. — *end note*]

#### 4.2.10 Concept Assignable

[`concepts.lib.corelang.assignable`]

```

template <class T, class U>
concept bool Assignable() {
    return CommonReference<const T&, const U&>() && requires(T&& t, U&& u) {
        { std::forward<T>(t) = std::forward<U>(u) } -> Same<T&>;
    };
}

```

1 Let  $t$  be an lvalue of type  $T$ , and  $R$  be the type `remove_reference_t<U>`. If  $U$  is an lvalue reference type, let  $v$  be an lvalue of type  $R$ ; otherwise, let  $v$  be an rvalue of type  $R$ . Let  $uu$  be a distinct object of type  $R$  such that  $uu$  is equal to  $v$ . Then `Assignable<T, U>()` is satisfied if and only if

- (1.1) — `std::addressof(t = v) == std::addressof(t)`.
- (1.2) — After evaluating `t = v`:
  - (1.2.1) — `t` is equal to `uu`.
  - (1.2.2) — If `v` is a non-const rvalue, its resulting state is unspecified. [*Note: v must still meet the requirements of the library component that is using it. The operations listed in those requirements must work as specified. — end note*]
  - (1.2.3) — Otherwise, `v` is not modified.

#### 4.2.11 Concept Swappable

[`concepts.lib.corelang.swappable`]

```
template <class T>
concept bool Swappable() {
    return requires(T&& a, T&& b) {
        ranges::swap(std::forward<T>(a), std::forward<T>(b));
    };
}

template <class T, class U>
concept bool Swappable() {
    return Swappable<T>() &&&
        Swappable<U>() &&&
        CommonReference<const T&, const U&>() &&&
        requires(T&& t, U&& u) {
            ranges::swap(std::forward<T>(t), std::forward<U>(u));
            ranges::swap(std::forward<U>(u), std::forward<T>(t));
        };
}
```

- 1 This subclause provides definitions for swappable types and expressions. In these definitions, let `t` denote an expression of type `T`, and let `u` denote an expression of type `U`.
- 2 An object `t` is *swappable with* an object `u` if and only if `Swappable<T, U>()` is satisfied. `Swappable<T, U>()` is satisfied if and only if given distinct objects `tt` equal to `t` and `uu` equal to `u`, after evaluating either `ranges::swap(t, u)` or `ranges::swap(u, t)`, `tt` is equal to `u` and `uu` is equal to `t`.
- 3 An rvalue or lvalue `t` is *swappable* if and only if `t` is swappable with any rvalue or lvalue, respectively, of type `T`.

[*Example:* User code can ensure that the evaluation of `swap` calls is performed in an appropriate context under the various conditions as follows:

```
#include <utility>

// Requires: std::forward<T>(t) shall be swappable with std::forward<U>(u).
template <class T, class U>
void value_swap(T&& t, U&& u) {
    using std::experimental::ranges::swap;
    swap(std::forward<T>(t), std::forward<U>(u));           // OK: uses "swappable with" conditions
                                                           // for rvalues and lvalues
}

// Requires: lvalues of T shall be swappable.
template <class T>
void lv_swap(T& t1, T& t2) {
    using std::experimental::ranges::swap;
    swap(t1, t2);                                         // OK: uses swappable conditions for
```

```

} // values of type T

namespace N {
    struct A { int m; };
    struct Proxy { A* a; };
    Proxy proxy(A& a) { return Proxy{ &a }; }

    void swap(A& x, Proxy p) {
        std::experimental::ranges::swap(x.m, p.a->m); // OK: uses context equivalent to swappable
                                                    // conditions for fundamental types
    }
    void swap(Proxy p, A& x) { swap(x, p); } // satisfy symmetry constraint
}

int main() {
    int i = 1, j = 2;
    lv_swap(i, j);
    assert(i == 2 && j == 1);

    N::A a1 = { 5 }, a2 = { -5 };
    value_swap(a1, proxy(a2));
    assert(a1.m == -5 && a2.m == 5);
}

```

— end example]

### 4.3 Comparison concepts

[concepts.lib.compare]

#### 4.3.1 In general

[concepts.lib.compare.general]

- <sup>1</sup> This section describes concepts that establish relationships and orderings on values of possibly differing object types.

#### 4.3.2 Concept Boolean

[concepts.lib.compare.boolean]

- <sup>1</sup> The Boolean concept specifies the requirements on a type that is usable in Boolean contexts.

```

template <class B>
concept bool Boolean() {
    return MoveConstructible<B>() && // (see 4.4.4)
        requires(const B b1, const B b2, const bool a) {
            bool(b1);
            { b1 } -> bool;
            bool(!b1);
            { !b1 } -> bool;
            { b1 && b2 } -> Same<bool>;
            { b1 && a } -> Same<bool>;
            { a && b1 } -> Same<bool>;
            { b1 || b2 } -> Same<bool>;
            { b1 || a } -> Same<bool>;
            { a || b1 } -> Same<bool>;
            { b1 == b2 } -> bool;
            { b1 != b2 } -> bool;
            { b1 == a } -> bool;
            { a == b1 } -> bool;
            { b1 != a } -> bool;
            { a != b1 } -> bool;
        };
}

```

```
};
}
```

<sup>2</sup> Given values `b1` and `b2` of type `B`, then `Boolean<B>()` is satisfied if and only if

- (2.1) — `bool(b1) == [](bool x) { return x; }(b1)`.
- (2.2) — `bool(b1) == !bool(!b1)`.
- (2.3) — `(b1 && b2)`, `(b1 && bool(b2))`, and `(bool(b1) && b2)` are all equal to `(bool(b1) && bool(b2))`, and have the same short-circuit evaluation.
- (2.4) — `(b1 || b2)`, `(b1 || bool(b2))`, and `(bool(b1) || b2)` are all equal to `(bool(b1) || bool(b2))`, and have the same short-circuit evaluation.
- (2.5) — `bool(b1 == b2)`, `bool(b1 == bool(b2))`, and `bool(bool(b1) == b2)` are all equal to `(bool(b1) == bool(b2))`.
- (2.6) — `bool(b1 != b2)`, `bool(b1 != bool(b2))`, and `bool(bool(b1) != b2)` are all equal to `(bool(b1) != bool(b2))`.

<sup>3</sup> [*Example*: The types `bool`, `std::true_type`, and `std::bitset<N>::reference` are `Boolean` types. Pointers, smart pointers, and types with explicit conversions to `bool` are not `Boolean` types. — *end example*]

### 4.3.3 Concept `EqualityComparable` [`concepts.lib.compare.equalitycomparable`]

```
template <class T, class U>
concept bool WeaklyEqualityComparable() {
    return requires(const T& t, const U& u) {
        { t == u } -> Boolean;
        { u == t } -> Boolean;
        { t != u } -> Boolean;
        { u != t } -> Boolean;
    };
}
```

<sup>1</sup> Let `t` and `u` be objects of types `T` and `U`. `WeaklyEqualityComparable<T, U>()` is satisfied if and only if:

- (1.1) — `t == u`, `u == t`, `t != u`, and `u != t` have the same domain.
- (1.2) — `bool(u == t) == bool(t == u)`.
- (1.3) — `bool(t != u) == !bool(t == u)`.
- (1.4) — `bool(u != t) == bool(t != u)`.

```
template <class T>
concept bool EqualityComparable() {
    return WeaklyEqualityComparable<T, T>();
}
```

<sup>2</sup> Let `a` and `b` be objects of type `T`. `EqualityComparable<T>()` is satisfied if and only if:

- (2.1) — `bool(a == b)` if and only if `a` is equal to `b`.

<sup>3</sup> [*Note*: The requirement that the expression `a == b` is equality preserving implies that `==` is reflexive, transitive, and symmetric. — *end note*]

```

template <class T, class U>
concept bool EqualityComparable() {
    return CommonReference<const T&, const U&>() &&
        EqualityComparable<T>() &&
        EqualityComparable<U>() &&
        EqualityComparable<
            remove_cv_t<remove_reference_t<common_reference_t<const T&, const U&>>>>() &&
            WeaklyEqualityComparable<T, U>();
}

```

- 4 Let  $a$  be an object of type  $T$ ,  $b$  be an object of type  $U$ , and  $C$  be `common_reference_t<const T&, const U&>`. Then `EqualityComparable<T, U>()` is satisfied if and only if:
- (4.1) — `bool(a == b) == bool(C(a) == C(b))`.

#### 4.3.4 Concept `StrictTotallyOrdered` [`concepts.lib.compare.stricttotallyordered`]

```

template <class T>
concept bool StrictTotallyOrdered() {
    return EqualityComparable<T>() &&
        requires(const T a, const T b) {
            { a < b } -> Boolean;
            { a > b } -> Boolean;
            { a <= b } -> Boolean;
            { a >= b } -> Boolean;
        };
}

```

- 1 Let  $a$ ,  $b$ , and  $c$  be objects of type  $T$ . Then `StrictTotallyOrdered<T>()` is satisfied if and only if
- (1.1) — Exactly one of `bool(a < b)`, `bool(b < a)`, or `bool(a == b)` is true.
- (1.2) — If `bool(a < b)` and `bool(b < c)`, then `bool(a < c)`.
- (1.3) — `bool(a > b) == bool(b < a)`.
- (1.4) — `bool(a <= b) == !bool(b < a)`.
- (1.5) — `bool(a >= b) == !bool(a < b)`.

```

template <class T, class U>
concept bool StrictTotallyOrdered() {
    return CommonReference<const T&, const U&>() &&
        StrictTotallyOrdered<T>() &&
        StrictTotallyOrdered<U>() &&
        StrictTotallyOrdered<
            remove_cv_t<remove_reference_t<common_reference_t<const T&, const U&>>>>() &&
            EqualityComparable<T, U>() &&
            requires(const T t, const U u) {
                { t < u } -> Boolean;
                { t > u } -> Boolean;
                { t <= u } -> Boolean;
                { t >= u } -> Boolean;
                { u < t } -> Boolean;
                { u > t } -> Boolean;
                { u <= t } -> Boolean;
                { u >= t } -> Boolean;
            };
}

```

- 2 Let `t` be an object of type `T`, `u` be an object of type `U`, and `C` be `common_reference_t<const T&, const U&>`. Then `StrictTotallyOrdered<T, U>()` is satisfied if and only if
- (2.1) — `bool(t < u) == bool(C(t) < C(u))`.
  - (2.2) — `bool(t > u) == bool(C(t) > C(u))`.
  - (2.3) — `bool(t <= u) == bool(C(t) <= C(u))`.
  - (2.4) — `bool(t >= u) == bool(C(t) >= C(u))`.
  - (2.5) — `bool(u < t) == bool(C(u) < C(t))`.
  - (2.6) — `bool(u > t) == bool(C(u) > C(t))`.
  - (2.7) — `bool(u <= t) == bool(C(u) <= C(t))`.
  - (2.8) — `bool(u >= t) == bool(C(u) >= C(t))`.

#### 4.4 Object concepts

[`concepts.lib.object`]

- 1 This section describes concepts that specify the basis of the value-oriented programming style on which the library is based.

##### 4.4.1 Concept Destructible

[`concepts.lib.object.destructible`]

- 1 The `Destructible` concept is the base of the hierarchy of object concepts. It specifies properties that all such object types have in common.

```
template <class T>
concept bool Destructible() {
    return requires(T t, const T ct, T* p) {
        { t.~T() } noexcept;
        { &t } -> Same<T*>; // not required to be equality preserving
        { &ct } -> Same<const T*>; // not required to be equality preserving
        delete p;
        delete[] p;
    };
}
```

- 2 The expression requirement `&ct` does not require implicit expression variants.
- 3 Given a (possibly `const`) lvalue `t` of type `T` and pointer `p` of type `T*`, `Destructible<T>()` is satisfied if and only if
- (3.1) — After evaluating the expression `t.~T()`, `delete p`, or `delete[] p`, all resources owned by the denoted object(s) are reclaimed.
  - (3.2) — `&t == std::addressof(t)`.
  - (3.3) — The expression `&t` is non-modifying.

##### 4.4.2 Concept Constructible

[`concepts.lib.object.constructible`]

- 1 The `Constructible` concept is used to constrain the type of a variable to be either an object type constructible from a given set of argument types, or a reference type that can be bound to those arguments.

```
template <class T, class... Args>
concept bool __ConstructibleObject = // exposition only
    Destructible<T>() && requires(Args&&... args) {
        T{std::forward<Args>(args)...}; // not required to be equality preserving
        new T{std::forward<Args>(args)...}; // not required to be equality preserving
    };
```



```
template <class T, class... Args>
concept bool __BindableReference = // exposition only
    is_reference<T>::value && requires(Args&&... args) {
    T(std::forward<Args>(args)...);
};
```

```
template <class T, class... Args>
concept bool Constructible() {
    return __ConstructibleObject<T, Args...> ||
        __BindableReference<T, Args...>;
}
```

#### 4.4.3 Concept DefaultConstructible [concepts.lib.object.defaultconstructible]

```
template <class T>
concept bool DefaultConstructible() {
    return Constructible<T>() &&
        requires(const size_t n) {
            new T[n]{}; // not required to be equality preserving
        };
}
```

- <sup>1</sup> [Note: The array allocation expression `new T[n]{}`  implicitly requires that `T` has a non-explicit default constructor. — end note]

#### 4.4.4 Concept MoveConstructible [concepts.lib.object.moveconstructible]

```
template <class T>
concept bool MoveConstructible() {
    return Constructible<T, remove_cv_t<T>&&>() &&
        ConvertibleTo<remove_cv_t<T>&&, T>();
}
```

- <sup>1</sup> Let `rv` be an rvalue of type `remove_cv_t<T>`. Then `MoveConstructible<T>()` is satisfied if and only if
- (1.1) — After the definition `T u = rv;`, `u` is equal to the value of `rv` before the construction.
- (1.2) — `T{rv}` or `*new T{rv}` is equal to the value of `rv` before the construction.
- <sup>2</sup> `rv`'s resulting state is unspecified. [Note: `rv` must still meet the requirements of the library component that is using it. The operations listed in those requirements must work as specified whether `rv` has been moved from or not. — end note]

#### 4.4.5 Concept CopyConstructible [concepts.lib.object.copyconstructible]

```
template <class T>
concept bool CopyConstructible() {
    return MoveConstructible<T>() &&
        Constructible<T, const remove_cv_t<T>&&>() &&
        ConvertibleTo<remove_cv_t<T>&, T>() &&
        ConvertibleTo<const remove_cv_t<T>&, T>() &&
        ConvertibleTo<const remove_cv_t<T>&&, T>();
}
```

- <sup>1</sup> Let `v` be an lvalue of type (possibly `const`) `remove_cv_t<T>` or an rvalue of type `const remove_cv_t<T>`. Then `CopyConstructible<T>()` is satisfied if and only if
- (1.1) — After the definition `T u = v;`, `v` is equal to `u`.
- (1.2) — `T{v}` or `*new T{v}` is equal to `v`.

#### 4.4.6 Concept Movable

[concepts.lib.object.movable]

```
template <class T>
concept bool Movable() {
    return MoveConstructible<T>() &&
        Assignable<T&, T>() &&
        Swappable<T&>();
}
```

#### 4.4.7 Concept Copyable

[concepts.lib.object.copyable]

```
template <class T>
concept bool Copyable() {
    return CopyConstructible<T>() &&
        Movable<T>() &&
        Assignable<T&, const T&>();
}
```

#### 4.4.8 Concept Semiregular

[concepts.lib.object.semiregular]

```
template <class T>
concept bool Semiregular() {
    return Copyable<T>() &&
        DefaultConstructible<T>();
}
```

- <sup>1</sup> [Note: The **Semiregular** concept is satisfied by types that behave similarly to built-in types like `int`, except that they may not be comparable with `==`. — end note]

#### 4.4.9 Concept Regular

[concepts.lib.object.regular]

```
template <class T>
concept bool Regular() {
    return Semiregular<T>() &&
        EqualityComparable<T>();
}
```

- <sup>1</sup> [Note: The **Regular** concept is satisfied by types that behave similarly to built-in types like `int` and that are comparable with `==`. — end note]

### 4.5 Callable concepts

[concepts.lib.callable]

#### 4.5.1 In general

[concepts.lib.callable.general]

- <sup>1</sup> The concepts in this section describe the requirements on function objects (5.3) and their arguments.

#### 4.5.2 Concept Invocable

[concepts.lib.callable.invocable]

- <sup>1</sup> The **Invocable** concept specifies a relationship between a callable type (ISO/IEC 14882:2014 §20.9.1) `F` and a set of argument types `Args...` which can be evaluated by the library function `invoke` (5.3.1).

```
template <class F, class... Args>
concept bool Invocable() {
    return CopyConstructible<F>() &&
        requires(F f, Args&&... args) {
            invoke(f, std::forward<Args>(args)...); // not required to be equality preserving
        };
}
```

- <sup>2</sup> [Note: Since the `invoke` function call expression is not required to be equality-preserving (4.1.1), a function that generates random numbers may satisfy **Invocable**. — end note]

### 4.5.3 Concept RegularInvocable

[concepts.lib.callable.regularinvocable]

```
template <class F, class... Args>
concept bool RegularInvocable() {
    return Invocable<F, Args...>();
}
```

- 1 The `invoke` function call expression shall be equality-preserving (4.1.1). [*Note:* This requirement supersedes the annotation in the definition of `Invocable`. — *end note*]
- 2 [*Note:* A random number generator does not satisfy `RegularInvocable`. — *end note*]
- 3 [*Note:* The distinction between `Invocable` and `RegularInvocable` is purely semantic. — *end note*]

### 4.5.4 Concept Predicate

[concepts.lib.callable.predicate]

```
template <class F, class... Args>
concept bool Predicate() {
    return RegularInvocable<F, Args...>() &&
        Boolean<result_of_t<F&(Args...)>>();
}
```

### 4.5.5 Concept Relation

[concepts.lib.callable.relation]

```
template <class R, class T>
concept bool Relation() {
    return Predicate<R, T, T>();
}
```

```
template <class R, class T, class U>
concept bool Relation() {
    return Relation<R, T>() &&
        Relation<R, U>() &&
        CommonReference<const T&, const U&>() &&
        Relation<R,
            common_reference_t<const T&, const U&>>() &&
        Predicate<R, T, U>() &&
        Predicate<R, U, T>();
}
```

- 1 Let `r` be any object of type `R`, `a` be any object of type `T`, `b` be any object of type `U`, and `C` be `common_reference_t<const T&, const U&>`. Then `Relation<R, T, U>()` is satisfied if and only if
- (1.1) — `bool(r(a, b)) == bool(r(C(a), C(b)))`.
- (1.2) — `bool(r(b, a)) == bool(r(C(b), C(a)))`.

### 4.5.6 Concept StrictWeakOrder

[concepts.lib.callable.strictweakorder]

```
template <class R, class T>
concept bool StrictWeakOrder() {
    return Relation<R, T>();
}
```

```
template <class R, class T, class U>
concept bool StrictWeakOrder() {
    return Relation<R, T, U>();
}
```

- 1 A `Relation` satisfies `StrictWeakOrder` if and only if it imposes a *strict weak ordering* on its arguments.

- 2 The term *strict* refers to the requirement of an irreflexive relation ( $\text{!comp}(x, x)$  for all  $x$ ), and the term *weak* to requirements that are not as strong as those for a total ordering, but stronger than those for a partial ordering. If we define  $\text{equiv}(a, b)$  as  $\text{!comp}(a, b) \ \&\& \ \text{!comp}(b, a)$ , then the requirements are that  $\text{comp}$  and  $\text{equiv}$  both be transitive relations:
- (2.1) —  $\text{comp}(a, b) \ \&\& \ \text{comp}(b, c)$  implies  $\text{comp}(a, c)$
  - (2.2) —  $\text{equiv}(a, b) \ \&\& \ \text{equiv}(b, c)$  implies  $\text{equiv}(a, c)$  [*Note*: Under these conditions, it can be shown that
    - (2.2.1) —  $\text{equiv}$  is an equivalence relation
    - (2.2.2) —  $\text{comp}$  induces a well-defined relation on the equivalence classes determined by  $\text{equiv}$
    - (2.2.3) — The induced relation is a strict total ordering. — *end note*]

## 5 General utilities library [utilities]

### 5.1 General [utilities.general]

- <sup>1</sup> This Clause describes utilities that are generally useful in C++ programs; some of these utilities are used by other elements of the Ranges library. These utilities are summarized in Table 4.

Table 4 — General utilities library summary

Subclause	Header(s)
5.2 Utility components	<experimental/ranges/utility>
5.3 Function objects	<experimental/ranges/functional>
5.4 Type traits	<type_traits>
5.5 Tagged tuple-like types	<experimental/ranges/utility> & <experimental/ranges/tuple>

### 5.2 Utility components [utility]

- <sup>1</sup> This subclause contains some basic function and class templates that are used throughout the rest of the library.

#### Header <experimental/ranges/utility> synopsis

- <sup>2</sup> The header <experimental/ranges/utility> defines several types, function templates, and concepts that are described in this Clause. It also defines the templates `tagged` and `tagged_pair` and various function templates that operate on `tagged_pair` objects.

```

namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    // 5.2.1, swap:
    namespace {
        constexpr unspecified swap = unspecified ;
    }

    // 5.2.2, exchange:
    template <MoveConstructible T, class U=T>
        requires Assignable<T&, U>()
    T exchange(T& obj, U&& new_val);

    // 5.5.2, struct with named accessors
    template <class T>
    concept bool TagSpecifier() {
        return see below;
    }

    template <class F>
    concept bool TaggedType() {
        return see below;
    }

    template <class Base, TagSpecifier... Tags>
        requires sizeof...(Tags) <= tuple_size<Base>::value
    struct tagged;

```

```

// 5.5.4, tagged pairs
template <TaggedType T1, TaggedType T2> using tagged_pair = see below;

template <TagSpecifier Tag1, TagSpecifier Tag2, class T1, class T2>
constexpr see below make_tagged_pair(T1&& x, T2&& y);
}}}}

namespace std {
// 5.5.3, tuple-like access to tagged
template <class Base, class... Tags>
struct tuple_size<experimental::ranges::tagged<Base, Tags...>>;

template <size_t N, class Base, class... Tags>
struct tuple_element<N, experimental::ranges::tagged<Base, Tags...>>;
}

```

- <sup>3</sup> Any entities declared or defined directly in namespace `std` in header `<utility>` that are not already defined in namespace `std::experimental::ranges::v1` in header `<experimental/ranges/utility>` are imported with *using-declarations* (ISO/IEC 14882:2014 §7.3.3). [ *Example:*

```

namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    using std::pair;
    using std::make_pair;
    // ... others
}}}}

```

— *end example*]

### 5.2.1 swap

[**utility.swap**]

- <sup>1</sup> The name `swap` denotes a customization point object (3.3.2.3). The effect of the expression `ranges::swap(E1, E2)` for some expressions `E1` and `E2` is equivalent to:
- (1.1) — `(void)swap(E1, E2)`, if that expression is valid, with overload resolution performed in a context that includes the declarations
- ```

template <class T>
void swap(T&, T&) = delete;
template <class T, size_t N>
void swap(T(&)[N], T(&)[N]) = delete;

```
- and does not include a declaration of `ranges::swap`. If the function selected by overload resolution does not exchange the values denoted by `E1` and `E2`, the program is ill-formed with no diagnostic required.
- (1.2) — Otherwise, `(void)swap_ranges(E1, E2)` if `E1` and `E2` are lvalues of array types (ISO/IEC 14882:2014 §3.9.2) of equal extent and `ranges::swap(*(E1), *(E2))` is a valid expression, except that `noexcept(ranges::swap(E1, E2))` is equal to `noexcept(ranges::swap(*(E1), *(E2)))`.
- (1.3) — Otherwise, if `E1` and `E2` are lvalues of the same type `T` which meets the syntactic requirements of `MoveConstructible<T>()` and `Assignable<T&, T>()`, exchanges the denoted values. `ranges::swap(E1, E2)` is a constant expression if the constructor selected by overload resolution for `T{std::move(E1)}` is a `constexpr` constructor and the expression `E1 = std::move(E2)` can appear in a `constexpr` function. `noexcept(ranges::swap(E1, E2))` is equal to `is_nothrow_move_constructible<T>::value && is_nothrow_move_assignable<T>::value`. If either `MoveConstructible` or `Assignable` is not satisfied, the program is ill-formed with no diagnostic required.

(1.4) — Otherwise, `ranges::swap(E1, E2)` is ill-formed.

<sup>2</sup> *Remark:* Whenever `ranges::swap(E1, E2)` is a valid expression, it exchanges the values denoted by `E1` and `E2` and has type `void`.

## 5.2.2 exchange

[utility.exchange]

```
template <MoveConstructible T, class U=T>
    requires Assignable<T&, U>()
T exchange(T& obj, U&& new_val);
```

<sup>1</sup> *Effects:* Equivalent to:

```
T old_val = std::move(obj);
obj = std::forward<U>(new_val);
return old_val;
```

## 5.3 Function objects

[function.objects]

<sup>1</sup> Header `<experimental/ranges/functional>` synopsis

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    // 5.3.1, invoke:
    template <class F, class... Args>
    result_of_t<F&&(Args&&...)> invoke(F&& f, Args&&... args);

    // 5.3.2, comparisons:
    template <class T = void>
        requires EqualityComparable<T>() || Same<T, void>()
    struct equal_to;

    template <class T = void>
        requires EqualityComparable<T>() || Same<T, void>()
    struct not_equal_to;

    template <class T = void>
        requires StrictTotallyOrdered<T>() || Same<T, void>()
    struct greater;

    template <class T = void>
        requires StrictTotallyOrdered<T>() || Same<T, void>()
    struct less;

    template <class T = void>
        requires StrictTotallyOrdered<T>() || Same<T, void>()
    struct greater_equal;

    template <class T = void>
        requires StrictTotallyOrdered<T>() || Same<T, void>()
    struct less_equal;

    template <> struct equal_to<void>;
    template <> struct not_equal_to<void>;
    template <> struct greater<void>;
    template <> struct less<void>;
    template <> struct greater_equal<void>;
    template <> struct less_equal<void>;
```

```
// 5.3.3, identity:
struct identity;
}}}
```

- <sup>2</sup> Any entities declared or defined directly in namespace `std` in header `<functional>` that are not already defined in namespace `std::experimental::ranges` in header `<experimental/ranges/functional>` are imported with *using-declarations* (ISO/IEC 14882:2014 §7.3.3). [*Example:*

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    using std::reference_wrapper;
    using std::ref;
    // ... others
}}}}
```

— *end example*]

- <sup>3</sup> Any nested namespaces defined directly in namespace `std` in header `<functional>` that are not already defined in namespace `std::experimental::ranges` in header `<experimental/ranges/functional>` are aliased with a *namespace-alias-definition* (ISO/IEC 14882:2014 §7.3.2). [*Example:*

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    namespace placeholders = std::placeholders;
}}}}
```

— *end example*]

### 5.3.1 Function template invoke

[**func.invoke**]

```
template <class F, class... Args>
result_of_t<F&&(Args&&...)> invoke(F&& f, Args&&... args);
```

- <sup>1</sup> *Effects:* Equivalent to:  
`return INVOKE(std::forward<F>(f), std::forward<Args>(args)...);` (ISO/IEC 14882:2014 §20.9.2).

### 5.3.2 Comparisons

[**comparisons**]

- <sup>1</sup> The library provides basic function object classes for all of the comparison operators in the language (ISO/IEC 14882:2014 §5.9, ISO/IEC 14882:2014 §5.10).

```
template <class T = void>
requires EqualityComparable<T>() || Same<T, void>()
struct equal_to {
    constexpr bool operator()(const T& x, const T& y) const;
};
```

- <sup>2</sup> `operator()` returns `x == y`.

```
template <class T = void>
requires EqualityComparable<T>() || Same<T, void>()
struct not_equal_to {
    constexpr bool operator()(const T& x, const T& y) const;
};
```

- <sup>3</sup> `operator()` returns `x != y`.

```
template <class T = void>
requires StrictTotallyOrdered<T>() || Same<T, void>()
struct greater {
```



```

    constexpr bool operator()(const T& x, const T& y) const;
};
4     operator() returns x > y.

template <class T = void>
    requires StrictTotallyOrdered<T>() || Same<T, void>()
struct less {
    constexpr bool operator()(const T& x, const T& y) const;
};
5     operator() returns x < y.

template <class T = void>
    requires StrictTotallyOrdered<T>() || Same<T, void>()
struct greater_equal {
    constexpr bool operator()(const T& x, const T& y) const;
};
6     operator() returns x >= y.

template <class T = void>
    requires StrictTotallyOrdered<T>() || Same<T, void>()
struct less_equal {
    constexpr bool operator()(const T& x, const T& y) const;
};
7     operator() returns x <= y.

template <> struct equal_to<void> {
    template <class T, class U>
        requires EqualityComparable<T, U>()
    constexpr auto operator()(T&& t, U&& u) const
        -> decltype(std::forward<T>(t) == std::forward<U>(u));

    typedef unspecified is_transparent;
};
8     operator() returns std::forward<T>(t) == std::forward<U>(u).

template <> struct not_equal_to<void> {
    template <class T, class U>
        requires EqualityComparable<T, U>()
    constexpr auto operator()(T&& t, U&& u) const
        -> decltype(std::forward<T>(t) != std::forward<U>(u));

    typedef unspecified is_transparent;
};
9     operator() returns std::forward<T>(t) != std::forward<U>(u).

template <> struct greater<void> {
    template <class T, class U>
        requires StrictTotallyOrdered<T, U>()
    constexpr auto operator()(T&& t, U&& u) const
        -> decltype(std::forward<T>(t) > std::forward<U>(u));

    typedef unspecified is_transparent;
};

```

10 operator() returns `std::forward<T>(t) > std::forward<U>(u)`.

```
template <> struct less<void> {
    template <class T, class U>
        requires StrictTotallyOrdered<T, U>()
        constexpr auto operator()(T&& t, U&& u) const
            -> decltype(std::forward<T>(t) < std::forward<U>(u));

    typedef unspecified is_transparent;
};
```

11 operator() returns `std::forward<T>(t) < std::forward<U>(u)`.

```
template <> struct greater_equal<void> {
    template <class T, class U>
        requires StrictTotallyOrdered<T, U>()
        constexpr auto operator()(T&& t, U&& u) const
            -> decltype(std::forward<T>(t) >= std::forward<U>(u));

    typedef unspecified is_transparent;
};
```

12 operator() returns `std::forward<T>(t) >= std::forward<U>(u)`.

```
template <> struct less_equal<void> {
    template <class T, class U>
        requires StrictTotallyOrdered<T, U>()
        constexpr auto operator()(T&& t, U&& u) const
            -> decltype(std::forward<T>(t) <= std::forward<U>(u));

    typedef unspecified is_transparent;
};
```

13 operator() returns `std::forward<T>(t) <= std::forward<U>(u)`.

14 For templates `greater`, `less`, `greater_equal`, and `less_equal`, the specializations for any pointer type yield a total order, even if the built-in operators `<`, `>`, `<=`, `>=` do not.

### 5.3.3 Class identity

[func.identity]

```
struct identity {
    template <class T>
        constexpr T&& operator()(T&& t) const noexcept;

    typedef unspecified is_transparent;
};
```

1 operator() returns `std::forward<T>(t)`.

## 5.4 Metaprogramming and type traits

[meta]

### 5.4.1 Header `<type_traits>` synopsis

[meta.type.synop]

[Editor's note: Change the `<type_traits>` synopsis (ISO/IEC 14882:2014 §20.10.2) as follows. Note: this change is intended to be made in namespace `std`.]

```
namespace std {
    [...]
    // 20.10.4.3, type properties:
```

```

[...]  

template <class T> struct is_move_assignable;  
  

template <class T, class U> struct is_swappable_with;  

template <class T> struct is_swappable;  
  

template <class T> struct is_destructible;  

[...]  

template <class T> struct is_nothrow_move_assignable;  
  

template <class T, class U> struct is_nothrow_swappable_with;  

template <class T> struct is_nothrow_swappable;  
  

template <class T> struct is_nothrow_destructible;  

[...]  
  

// 20.10.7.6, other transformations:  

[...]  

template <class... T> struct common_type;  

template <class T, class U, template <class> class TQual, template <class> class UQual>  

struct basic_common_reference { };  

template <class... T> struct common_reference;  

template <class T> struct underlying_type;  

[...]  

template <class... T>  

using common_type_t = typename common_type<T...>::type;  

template <class... T>  

using common_reference_t = typename common_reference<T...>::type;  

template <class T>  

using underlying_type_t = typename underlying_type<T>::type;  

[...]  
  

// 20.15.4.3, type properties  

[...]  

template <class T, class U> constexpr bool is_swappable_with_v  

= is_swappable_with<T, U>::value;  

template <class T> constexpr bool is_swappable_v  

= is_swappable<T>::value;  

[...]  

template <class T, class U> constexpr bool is_nothrow_swappable_with_v  

= is_nothrow_swappable_with<T, U>::value;  

template <class T> constexpr bool is_nothrow_swappable_v  

= is_nothrow_swappable<T>::value;  

[...]  

}

```

## 5.4.2 Type properties

[[meta.unary.prop](#)]

[Editor's note: Change [[meta.unary.prop](#)], Table 49 – “Type property predicates” in ISO/IEC 14882:2014 as indicated. The following is taken from the current Working Draft of C++17.]

Table 49 — Type property predicates

| Template | Condition | Preconditions |
|----------|-----------|---------------|
| ...      |           |               |

Table 49 — Type property predicates (continued)

| Template                                                                             | Condition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Preconditions                                                                                                                      |
|--------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <code>template &lt;class T, class U&gt;<br/>struct is_swappable_with;</code>         | The expressions <code>swap(declval&lt;T&gt;(), declval&lt;U&gt;())</code> and <code>swap(declval&lt;U&gt;(), declval&lt;T&gt;())</code> are each well-formed when treated as an unevaluated operand (Clause ISO/IEC 14882:2014 §5) in an overload-resolution context for swappable values (4.2.11). Access checking is performed as if in a context unrelated to <code>T</code> and <code>U</code> . Only the validity of the immediate context of the <code>swap</code> expressions is considered. <i>Remark:</i> The compilation of the expressions can result in side effects such as the instantiation of class template specializations and function template specializations, the generation of implicitly-defined functions, and so on. Such side effects are not in the “immediate context” and can result in the program being ill-formed. | <code>T</code> and <code>U</code> shall be complete types, (possibly cv-qualified) <code>void</code> , or arrays of unknown bound. |
| <code>template &lt;class T&gt;<br/>struct is_swappable;</code>                       | For a referenceable type <code>T</code> , the same result as <code>is_swappable_with_v&lt;T&amp;, T&amp;&gt;</code> , otherwise <code>false</code> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <code>T</code> shall be a complete type, (possibly cv-qualified) <code>void</code> , or an array of unknown bound.                 |
| ...                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                    |
| <code>template &lt;class T, class U&gt;<br/>struct is_nothrow_swappable_with;</code> | <code>is_swappable_with_v&lt;T, U&gt;</code> is <code>true</code> and each <code>swap</code> expression of the definition of <code>is_swappable_with&lt;T, U&gt;</code> is known not to throw any exceptions (ISO/IEC 14882:2014 §5.3.7).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <code>T</code> and <code>U</code> shall be complete types, (possibly cv-qualified) <code>void</code> , or arrays of unknown bound. |

Table 49 — Type property predicates (continued)

| Template                                                               | Condition                                                                                                                                     | Preconditions                                                                           |
|------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| <code>template &lt;class T&gt;<br/>struct is_nothrow_swappable;</code> | For a referenceable type T, the same result as <code>is_nothrow_swappable</code> with <code>v&lt;T&amp;, T&amp;&gt;</code> , otherwise false. | T shall be a complete type, (possibly cv-qualified) void, or an array of unknown bound. |
| ...                                                                    |                                                                                                                                               |                                                                                         |

### 5.4.3 Other transformations

[meta.trans.other]

[Editor's note: Change Table 57 – “Other Transformations” in ISO/IEC 14882:2014 as follows:]

Table 57 — Other transformations

| Template                                                                                                                                                          | Condition | Comments                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ...                                                                                                                                                               |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <code>template &lt;class... T&gt;<br/>struct common_type;</code>                                                                                                  |           | The member typedef <code>type</code> shall be defined or omitted as specified below. If it is omitted, there shall be no member <code>type</code> . All types Each type in the parameter pack T shall be complete or (possibly cv) void. A program may specialize this trait if at least one template parameter in the specialization is depends on a user-defined type and <code>sizeof...(T) == 2</code> . Remark: Such specializations are needed when only explicit conversions are desired among the template arguments. |
| <code>template &lt;class T, class U,<br/>template &lt;class&gt; class TQual,<br/>template &lt;class&gt; class UQual&gt;<br/>struct basic_common_reference;</code> |           | The primary template shall have no member typedef <code>type</code> . A program may specialize this trait if at least one template parameter in the specialization depends on a user-defined type. In such a specialization, a member typedef <code>type</code> may be defined or omitted. If it is omitted, there shall be no member <code>type</code> . Remark: Such specializations may be used to influence the result of <code>common_reference</code> .                                                                 |
| <code>template &lt;class... T&gt;<br/>struct common_reference;</code>                                                                                             |           | The member typedef <code>type</code> shall be defined or omitted as specified below. If it is omitted, there shall be no member <code>type</code> . Each type in the parameter pack T shall be complete or (possibly cv) void.                                                                                                                                                                                                                                                                                                |
| ...                                                                                                                                                               |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

[Editor's note: Delete [meta.trans.other]/p3 from ISO/IEC 14882:2014 and replace it with the following:]

<sup>1</sup> Let CREF(A) be `add_lvalue_reference_t<const remove_reference_t<A>>`. Let UNCVREF(A) be `remove_cv_t<remove_reference_t<A>>`. Let XREF(A) denote a unary template T such that `T<UNCVREF(A)>` denotes the same type as A. Let COPYCV(FROM, TO) be an alias for type TO with the addition of FROM's top-level cv-qualifiers. [Example: `COPYCV(const int, volatile short)` is an alias for `const volatile short`. — end example] Let RREF\_RES(Z) be `remove_reference_t<Z>&&` if Z is a reference type or Z otherwise. Let COND\_RES(X, Y) be `decltype(declval<bool>() ? declval<X>() : declval<Y>())`. Given types A and B, let X be `remove_reference_t<A>`, let Y be `remove_reference_t<B>`, and let COMMON\_REF(A, B) be:

- (1.1) — If A and B are both lvalue reference types, `COMMON_REF(A, B)` is `COND_RES(COPYCV(X, Y) &, COPYCV(Y, X) &)`.
- (1.2) — Otherwise, let C be `RREF_RES(COMMON_REF(X&, Y&))`. If A and B are both rvalue reference types, and C is well-formed, and `is_convertible<A, C>::value` and `is_convertible<B, C>::value` are true, then `COMMON_REF(A, B)` is C.
- (1.3) — Otherwise, let D be `COMMON_REF(const X&, Y&)`. If A is an rvalue reference and B is an lvalue reference and D is well-formed and `is_convertible<A, D>::value` is true, then `COMMON_REF(A, B)` is D.
- (1.4) — Otherwise, if A is an lvalue reference and B is an rvalue reference, then `COMMON_REF(A, B)` is `COMMON_REF(B, A)`.
- (1.5) — Otherwise, `COMMON_REF(A, B)` is `decay_t<COND_RES(CREF(A), CREF(B))>`.

If any of the types computed above are ill-formed, then `COMMON_REF(A, B)` is ill-formed.

<sup>2</sup> For the `common_type` trait applied to a parameter pack T of types, the member `type` shall be either defined or not present as follows:

- (2.1) — If `sizeof...(T)` is zero, there shall be no member `type`.
- (2.2) — Otherwise, if `sizeof...(T)` is one, let ~~T0T1~~ denote the sole type in the pack T. The member typedef `type` shall denote the same type as `decay_t<T0T1>`.
- (2.3) — Otherwise, if `sizeof...(T)` is two, let T1 and T2 denote the two types in the pack T, and let D1 and D2 be `decay_t<T1>` and `decay_t<T2>` respectively. Then
  - (2.3.1) — If D1 and T1 denote the same type and D2 and T2 denote the same type, then
    - (2.3.1.1) — If `COMMON_REF(T1, T2)` is well-formed, then the member typedef `type` denotes that type.
    - (2.3.1.2) — Otherwise, there shall be no member `type`.
  - (2.3.2) — Otherwise, if `common_type_t<D1, D2>` is well-formed, then the member typedef `type` denotes that type.
  - (2.3.3) — Otherwise, there shall be no member `type`.
- (2.4) — Otherwise, if `sizeof...(T)` is greater than ~~one~~two, let T1, T2, and `Rest`, respectively, denote the first, second, and (pack of) remaining types comprising T. [~~Note: sizeof...(R) may be zero. — end note~~] Let C ~~denote the type, if any, of an unevaluated conditional expression (5.16) whose first operand is an arbitrary value of type bool, whose second operand is an xvalue of type T1, and whose third operand is an xvalue of type T2.~~ be the type `common_type_t<T1, T2>`. Then:
  - (2.4.1) — If there is such a type C, the member typedef `type` shall denote the same type, if any, as `common_type_t<C, Rest...>`.

- (2.4.2) — Otherwise, there shall be no member type.
- <sup>3</sup> For the `common_reference` trait applied to a parameter pack T of types, the member type shall be either defined or not present as follows:
- (3.1) — If `sizeof... (T)` is zero, there shall be no member type.
- (3.2) — Otherwise, if `sizeof... (T)` is one, let T1 denote the sole type in the pack T. The member typedef type shall denote the same type as T1.
- (3.3) — Otherwise, if `sizeof... (T)` is two, let T1 and T2 denote the two types in the pack T. Then
- (3.3.1) — If `COMMON_REF(T1, T2)` is well-formed and denotes a reference type then the member typedef type denotes that type.
- (3.3.2) — Otherwise, if `basic_common_reference<UNCVREF(T1), UNCVREF(T2), XREF(T1), XREF(T2)>::type` is well-formed, then the member typedef type denotes that type.
- (3.3.3) — Otherwise, if `common_type_t<T1, T2>` is well-formed, then the member typedef type denotes that type.
- (3.3.4) — Otherwise, there shall be no member type.
- (3.4) — Otherwise, if `sizeof... (T)` is greater than two, let T1, T2, and Rest, respectively, denote the first, second, and (pack of) remaining types comprising T. Let C be the type `common_reference_t<T1, T2>`. Then:
- (3.4.1) — If there is such a type C, the member typedef type shall denote the same type, if any, as `common_reference_t<C, Rest...>`.
- (3.4.2) — Otherwise, there shall be no member type.

## 5.5 Tagged tuple-like types

[taggedtuple]

### 5.5.1 In general

[taggedtuple.general]

- <sup>1</sup> The library provides a template for augmenting a tuple-like type with named element accessor member functions. The library also provides several templates that provide access to `tagged` objects as if they were `tuple` objects (see ISO/IEC 14882:2014 §20.4.2.6).

### 5.5.2 Class template `tagged`

[taggedtuple.tagged]

- <sup>1</sup> Class template `tagged` augments a tuple-like class type (e.g., `pair` (ISO/IEC 14882:2014 §20.3), `tuple` (ISO/IEC 14882:2014 §20.4)) by giving it named accessors. It is used to define the alias templates `tagged_pair` (5.5.4) and `tagged_tuple` (5.5.5).
- <sup>2</sup> In the class synopsis below, let  $i$  be in the range  $[0, \text{sizeof...}(\text{Tags}))$  and  $T_i$  be the  $i^{\text{th}}$  type in `Tags`, where indexing is zero-based.

```
// defined in header <experimental/ranges/utility>
```

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    template <class T>
    concept bool TagSpecifier() {
        return implementation-defined;
    }

    template <class F>
    concept bool TaggedType() {
```

```

    return implementation-defined;
}

template <class Base, TagSpecifier... Tags>
    requires sizeof...(Tags) <= tuple_size<Base>::value
struct tagged :
    Base, TAGGET(tagged<Base, Tags...>,  $T_i$ ,  $i$ )... { // see below
    using Base::Base;
    tagged() = default;
    tagged(tagged&&) = default;
    tagged(const tagged&) = default;
    tagged &operator=(tagged&&) = default;
    tagged &operator=(const tagged&) = default;
    template <class Other>
        requires Constructible<Base, Other>()
    tagged(tagged<Other, Tags...> &&that) noexcept(see below);
    template <class Other>
        requires Constructible<Base, const Other&>()
    tagged(const tagged<Other, Tags...> &that);
    template <class Other>
        requires Assignable<Base&, Other>()
    tagged& operator=(tagged<Other, Tags...>&& that) noexcept(see below);
    template <class Other>
        requires Assignable<Base&, const Other&>()
    tagged& operator=(const tagged<Other, Tags...>& that);
    template <class U>
        requires Assignable<Base&, U>() && !Same<decay_t<U>, tagged>()
    tagged& operator=(U&& u) noexcept(see below);
    void swap(tagged& that) noexcept(see below)
        requires Swappable<Base&>();
    friend void swap(tagged&, tagged&) noexcept(see below)
        requires Swappable<Base&>();
};
}}}}

```

- <sup>3</sup> A *tagged getter* is an empty trivial class type that has a named member function that returns a reference to a member of a tuple-like object that is assumed to be derived from the getter class. The tuple-like type of a tagged getter is called its *DerivedCharacteristic*. The index of the tuple element returned from the getter's member functions is called its *ElementIndex*. The name of the getter's member function is called its *ElementName*.
- <sup>4</sup> A tagged getter class with *DerivedCharacteristic*  $D$ , *ElementIndex*  $N$ , and *ElementName*  $name$  shall provide the following interface:

```

struct __TAGGED_GETTER {
    constexpr decltype(auto) name() &          { return get<N>(static_cast<D&>(*this)); }
    constexpr decltype(auto) name() &&        { return get<N>(static_cast<D&&>(*this)); }
    constexpr decltype(auto) name() const &   { return get<N>(static_cast<const D&>(*this)); }
};

```

- <sup>5</sup> A *tag specifier* is a type that facilitates a mapping from a tuple-like type and an element index into a *tagged getter* that gives named access to the element at that index. `TagSpecifier<T>()` is satisfied if and only if  $T$  is a tag specifier. The tag specifiers in the `Tags` parameter pack shall be unique. [*Note*: The mapping mechanism from tag specifier to tagged getter is unspecified. — *end note*]
- <sup>6</sup> Let `TAGGET(D, T, N)` name a tagged getter type that gives named access to the  $N$ -th element of the



tuple-like type D.

- 7 It shall not be possible to delete an instance of class template `tagged` through a pointer to any base other than `Base`.
- 8 `TaggedType<F>()` is satisfied if and only if `F` is a unary function type with return type `T` which satisfies `TagSpecifier<T>()`. Let `TAGSPEC(F)` name the tag specifier of the `TaggedType F`, and let `TAGELEM(F)` name the argument type of the `TaggedType F`.

```
template <class Other>
    requires Constructible<Base, Other>()
tagged(tagged<Other, Tags...> &&that) noexcept(see below);
```

- 9 *Remarks:* The expression in the `noexcept` is equivalent to:

```
is_nothrow_constructible<Base, Other>::value
```

- 10 *Effects:* Initializes `Base` with `static_cast<Other&&>(that)`.

```
template <class Other>
    requires Constructible<Base, const Other&>()
tagged(const tagged<Other, Tags...>& that);
```

- 11 *Effects:* Initializes `Base` with `static_cast<const Other&>(that)`.

```
template <class Other>
    requires Assignable<Base&, Other>()
tagged& operator=(tagged<Other, Tags...>&& that) noexcept(see below);
```

- 12 *Remarks:* The expression in the `noexcept` is equivalent to:

```
is_nothrow_assignable<Base&, Other>::value
```

- 13 *Effects:* Assigns `static_cast<Other&&>(that)` to `static_cast<Base&>>(*this)`.

- 14 *Returns:* `*this`.

```
template <class Other>
    requires Assignable<Base&, const Other&>()
tagged& operator=(const tagged<Other, Tags...>& that);
```

- 15 *Effects:* Assigns `static_cast<const Other&>(that)` to `static_cast<Base&>>(*this)`.

- 16 *Returns:* `*this`.

```
template <class U>
    requires Assignable<Base&, U>() && !Same<decay_t<U>, tagged>()
tagged& operator=(U&& u) noexcept(see below);
```

- 17 *Remarks:* The expression in the `noexcept` is equivalent to:

```
is_nothrow_assignable<Base&, U>::value
```

- 18 *Effects:* Assigns `std::forward<U>(u)` to `static_cast<Base&>>(*this)`.

- 19 *Returns:* `*this`.

```
void swap(tagged& rhs) noexcept(see below)
    requires Swappable<Base&>();
```

- 20 *Remarks:* The expression in the `noexcept` is equivalent to:

```
noexcept(swap(declval<Base&>(), declval<Base&>()))
```

21 *Effects:* Calls `swap` on the result of applying `static_cast` to `*this` and `that`.

22 *Throws:* Nothing unless the call to `swap` on the Base sub-objects throws.

```
friend void swap(tagged& lhs, tagged& rhs) noexcept(see below)
    requires Swappable<Base&>();
```

23 *Remarks:* The expression in the `noexcept` is equivalent to:

```
noexcept(lhs.swap(rhs))
```

24 *Effects:* Equivalent to `lhs.swap(rhs)`.

### 5.5.3 Tuple-like access to tagged

[tagged.astuple]

```
namespace std {
    template <class Base, class... Tags>
    struct tuple_size<experimental::ranges::tagged<Base, Tags...>>
        : tuple_size<Base> { };

    template <size_t N, class Base, class... Tags>
    struct tuple_element<N, experimental::ranges::tagged<Base, Tags...>>
        : tuple_element<N, Base> { };
}
```

### 5.5.4 Alias template `tagged_pair`

[tagged.pairs]

*// defined in header <experimental/ranges/utility>*

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    // ...
    template <TaggedType T1, TaggedType T2>
    using tagged_pair = tagged<pair<TAGELEM(T1), TAGELEM(T2)>,
        TAGSPEC(T1), TAGSPEC(T2)>;
}}}}
```

1 [Example:

```
// See 7.2:
tagged_pair<tag::min(int), tag::max(int)> p{0, 1};
assert(&p.min() == &p.first);
assert(&p.max() == &p.second);
```

— end example]

#### 5.5.4.1 Tagged pair creation functions

[tagged.pairs.creation]

*// defined in header <experimental/ranges/utility>*

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    template <TagSpecifier Tag1, TagSpecifier Tag2, class T1, class T2>
    constexpr see below make_tagged_pair(T1&& x, T2&& y);
}}}}
```

1 Let P be the type of `make_pair(std::forward<T1>(x), std::forward<T2>(y))`. Then the return type is `tagged<P, Tag1, Tag2>`.

2 *Returns:* `{std::forward<T1>(x), std::forward<T2>(y)}`.

3 [Example: In place of:

```
return tagged_pair<tag::min(int), tag::max(double)>(5, 3.1415926); // explicit types
```

a C++ program may contain:

```
    return make_tagged_pair<tag::min, tag::max>(5, 3.1415926);           // types are deduced
— end example]
```

## 5.5.5 Alias template `tagged_tuple` [tagged.tuple]

### 1 Header `<experimental/ranges/tuple>` synopsis

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    template <TaggedType... Types>
    using tagged_tuple = tagged<tuple<TAGELEM(Types)...>,
                                TAGSPEC(Types)...>;

    template <TagSpecifier... Tags, class... Types>
    requires sizeof...(Tags) == sizeof...(Types)
    constexpr see below make_tagged_tuple(Types&&... t);
}}}}
```

2 Any entities declared or defined in namespace `std` in header `<tuple>` that are not already defined in namespace `std::experimental::ranges` in header `<experimental/ranges/tuple>` are imported with *using-declarations* (ISO/IEC 14882:2014 §7.3.3). [Example:

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    using std::tuple;
    using std::make_tuple;
    // ... others
}}}}
```

— end example]

3

```
template <TaggedType... Types>
using tagged_tuple = tagged<tuple<TAGELEM(Types)...>,
                            TAGSPEC(Types)...>;
```

4 [Example:

```
// See 7.2:
tagged_tuple<tag::in(char*), tag::out(char*)> t{0, 0};
assert(&t.in() == &get<0>(t));
assert(&t.out() == &get<1>(t));
```

— end example]

### 5.5.5.1 Tagged tuple creation functions [tagged.tuple.creation]

```
template <TagSpecifier... Tags, class... Types>
requires sizeof...(Tags) == sizeof...(Types)
constexpr see below make_tagged_tuple(Types&&... t);
```

1 Let `T` be the type of `make_tuple(std::forward<Types>(t)...) . Then the return type is tagged<T, Tags...>.`

2 *Returns:* `tagged<T, Tags...>(std::forward<Types>(t)...) .`

3 [Example:

```
int i; float j;
make_tagged_tuple<tag::in1, tag::in2, tag::out>(1, ref(i), cref(j))
```

creates a tagged tuple of type

```
tagged_tuple<tag::in1(int), tag::in2(int&), tag::out(const float&)>
```

— *end example*]

## 6 Iterators library

[iterators]

### 6.1 General

[iterators.general]

- <sup>1</sup> This Clause describes components that C++ programs may use to perform iterations over containers (Clause ISO/IEC 14882:2014 §23), streams (ISO/IEC 14882:2014 §27.7), stream buffers (ISO/IEC 14882:2014 §27.6), and ranges (6.9).
- <sup>2</sup> The following subclauses describe iterator requirements, and components for iterator primitives, predefined iterators, and stream iterators, as summarized in Table 5.

Table 5 — Iterators library summary

| Subclause | Header(s)                                          |
|-----------|----------------------------------------------------|
| 6.2       | Requirements                                       |
| 6.6       | Iterator primitives <experimental/ranges/iterator> |
| 6.7       | Predefined iterators                               |
| 6.8       | Stream iterators                                   |
| 6.9       | Ranges                                             |

### 6.2 Iterator requirements

[iterator.requirements]

#### 6.2.1 In general

[iterator.requirements.general]

- <sup>1</sup> Iterators are a generalization of pointers that allow a C++ program to work with different data structures (for example, containers and ranges) in a uniform manner. To be able to construct template algorithms that work correctly and efficiently on different types of data structures, the library formalizes not just the interfaces but also the semantics and complexity assumptions of iterators. All input iterators *i* support the expression `*i`, resulting in a value of some object type *T*, called the *value type* of the iterator. All output iterators support the expression `*i = o` where *o* is a value of some type that is in the set of types that are *writable* to the particular iterator type of *i*. For every iterator type *X* there is a corresponding signed integer type called the *difference type* of the iterator.
- <sup>2</sup> Since iterators are an abstraction of pointers, their semantics are a generalization of most of the semantics of pointers in C++. This ensures that every function template that takes iterators works as well with regular pointers. This International Standard defines five categories of iterators, according to the operations defined on them: *input iterators*, *output iterators*, *forward iterators*, *bidirectional iterators* and *random access iterators*, as shown in Table 6.

Table 6 — Relations among iterator categories

|                      |   |                      |   |                |   |                 |
|----------------------|---|----------------------|---|----------------|---|-----------------|
| <b>Random Access</b> | → | <b>Bidirectional</b> | → | <b>Forward</b> | → | <b>Input</b>    |
|                      |   |                      |   |                |   | → <b>Output</b> |

- <sup>3</sup> The five categories of iterators correspond to the iterator concepts `InputIterator`, `OutputIterator`, `ForwardIterator`, `BidirectionalIterator`, and `RandomAccessIterator`, respectively. The generic term *iterator* refers to any type that satisfies `Iterator`.
- <sup>4</sup> Forward iterators satisfy all the requirements of input iterators and can be used whenever an input iterator is specified; Bidirectional iterators also satisfy all the requirements of forward iterators and can be used when-

ever a forward iterator is specified; Random access iterators also satisfy all the requirements of bidirectional iterators and can be used whenever a bidirectional iterator is specified.

- 5 Iterators that further satisfy the requirements of output iterators are called *mutable iterators*. Nonmutable iterators are referred to as *constant iterators*.
- 6 Just as a regular pointer to an array guarantees that there is a pointer value pointing past the last element of the array, so for any iterator type there is an iterator value that points past the last element of a corresponding sequence. These values are called *past-the-end* values. Values of an iterator *i* for which the expression `*i` is defined are called *dereferenceable*. The library never assumes that past-the-end values are dereferenceable. Iterators can also have singular values that are not associated with any sequence. [*Example*: After the declaration of an uninitialized pointer `x` (as with `int* x;`), `x` must always be assumed to have a singular value of a pointer. — *end example*] Results of most expressions are undefined for singular values; the only exceptions are destroying an iterator that holds a singular value, the assignment of a non-singular value to an iterator that holds a singular value, and using a value-initialized iterator as the source of a copy or move operation. [*Note*: This guarantee is not offered for default initialization, although the distinction only matters for types with trivial default constructors such as pointers or aggregates holding pointers. — *end note*] In these cases the singular value is overwritten the same way as any other value. Dereferenceable values are always non-singular.
- 7 Most of the library's algorithmic templates that operate on data structures have interfaces that use ranges. A range is an iterator and a *sentinel* that designate the beginning and end of the computation. An iterator and a sentinel denoting a range are comparable. A sentinel denotes an element when it compares equal to an iterator *i*, and *i* points to that element. The types of a sentinel and an iterator that denote a range must satisfy `Sentinel` (6.2.7).
- 8 A sentinel *s* is called *reachable* from an iterator *i* if and only if there is a finite sequence of applications of the expression `++i` that makes `i == s`. If *s* is reachable from *i*, they denote a range.
- 9 A range `[i,s)` is empty if `i == s`; otherwise, `[i,s)` refers to the elements in the data structure starting with the element pointed to by *i* and up to but not including the element pointed to by the first iterator *j* such that `j == s`.
- 10 A range `[i,s)` is valid if and only if *s* is reachable from *i*. The result of the application of functions in the library to invalid ranges is undefined.
- 11 All the categories of iterators require only those functions that are realizable for a given category in constant time (amortized).
- 12 Destruction of an iterator may invalidate pointers and references previously obtained from that iterator.
- 13 An *invalid* iterator is an iterator that may be singular.<sup>3</sup>

## 6.2.2 Concept Readable

[`iterators.readable`]

- 1 The `Readable` concept is satisfied by types that are readable by applying `operator*` including pointers, smart pointers, and iterators.

```
template <class I>
concept bool Readable() {
    return Movable<I>() && DefaultConstructible<I>() &&
        requires(const I& i) {
            typename value_type_t<I>;
            typename reference_t<I>;
            typename rvalue_reference_t<I>;
            { *i } -> Same<reference_t<I>>;
        }
};
```

<sup>3</sup>) This definition applies to pointers, since pointers are iterators. The effect of dereferencing an iterator that has been invalidated is undefined.

```

    { ranges::iter_move(i) } -> Same<rvalue_reference_t<I>>;
} &&
CommonReference<reference_t<I>, value_type_t<I>&>() &&
CommonReference<reference_t<I>, rvalue_reference_t<I>>() &&
CommonReference<rvalue_reference_t<I>, const value_type_t<I>&>() &&
Same<
    common_reference_t<reference_t<I>, value_type_t<I>>,
    value_type_t<I>>() &&
Same<
    common_reference_t<rvalue_reference_t<I>, value_type_t<I>>,
    value_type_t<I>>();
}

```

- 2 A `Readable` type has an associated value type that can be accessed with the `value_type_t` alias template.

```

template <class> struct value_type { };

template <class T>
struct value_type<T*>
    : enable_if<is_object<T>::value, remove_cv_t<T>> { };

template <class I>
    requires is_array<I>::value
struct value_type<I> : value_type<decay_t<I>> { };

template <class I>
struct value_type<I const> : value_type<decay_t<I>> { };

template <class T>
    requires requires { typename T::value_type; }
struct value_type<T>
    : enable_if<is_object<typename T::value_type>::value, typename T::value_type> { };

template <class T>
    requires requires { typename T::element_type; }
struct value_type<T>
    : enable_if<is_object<typename T::element_type>::value, typename T::element_type> { };

template <class T>
    using value_type_t = typename value_type<T>::type;

```

- 3 If a type `I` has an associated value type, then `value_type<I>::type` shall name the value type. Otherwise, there shall be no nested type `type`.
- 4 The `value_type` class template may be specialized on user-defined types.
- 5 When instantiated with a type `I` such that `I::value_type` is valid and denotes a type, `value_type<I>::type` names that type, unless it is not an object type (ISO/IEC 14882:2014 §3.9) in which case `value_type<I>` shall have no nested type `type`. [*Note:* Some legacy output iterators define a nested type named `value_type` that is an alias for `void`. These types are not `Readable` and have no associated value types. — *end note*]
- 6 When instantiated with a type `I` such that `I::element_type` is valid and denotes a type, `value_type<I>::type` names that type, unless it is not an object type (ISO/IEC 14882:2014 §3.9) in which case `value_type<I>` shall have no nested type `type`. [*Note:* Smart pointers like `shared_ptr<int>` are `Readable` and have an associated value type. But a smart pointer like `shared_ptr<void>` is not `Readable` and has no associated value type. — *end note*]

### 6.2.3 Concept Writable

[iterators.writable]

- <sup>1</sup> The **Writable** concept specifies the requirements for writing a value into an iterator's referenced object.

```
template <class Out, class T>
concept bool Writable() {
    return Semiregular<Out>() &&
        requires(Out o, T&& t) {
            *o = std::forward<T>(t); // not required to be equality preserving
        };
}
```

- <sup>2</sup> Let **E** be an expression such that `decltype(E)` is **T**, and let **o** be a dereferenceable object of type **Out**. Then `Writable<Out, T>()` is satisfied if and only if
- (2.1) — If `Readable<Out>() && Same<value_type_t<Out>, decay_t<T>>()` is satisfied, then `*o` after the assignment is equal to the value of **E** before the assignment.
- <sup>3</sup> After evaluating the assignment expression, **o** is not required to be dereferenceable.
- <sup>4</sup> If **E** is an xvalue (ISO/IEC 14882:2014 §3.10), the resulting state of the object it denotes is unspecified. [ *Note:* The object must still meet the requirements of any library component that is using it. The operations listed in those requirements must work as specified whether the object has been moved from or not. — *end note* ]
- <sup>5</sup> [ *Note:* The only valid use of an operator\* is on the left side of the assignment statement. *Assignment through the same value of the writable type happens only once.* — *end note* ]

### 6.2.4 Concept WeaklyIncrementable

[iterators.weaklyincrementable]

- <sup>1</sup> The **WeaklyIncrementable** concept specifies the requirements on types that can be incremented with the pre- and post-increment operators. The increment operations are not required to be equality-preserving, nor is the type required to be `EqualityComparable`.

```
template <class I>
concept bool WeaklyIncrementable() {
    return Semiregular<I>() &&
        requires(I i) {
            typename difference_type_t<I>;
            requires SignedIntegral<difference_type_t<I>>();
            { ++i } -> Same<I&>; // not required to be equality preserving
            i++; // not required to be equality preserving
        };
}
```

- <sup>2</sup> Let **i** be an object of type **I**. When both pre- and post-increment are valid, **i** is said to be *incrementable*. Then `WeaklyIncrementable<I>()` is satisfied if and only if
- (2.1) — `++i` is valid if and only if `i++` is valid.
- (2.2) — If **i** is incrementable, then both `++i` and `i++` advance **i** to the next element.
- (2.3) — If **i** is incrementable, then `&++i == &i`.
- <sup>3</sup> [ *Note:* For `WeaklyIncrementable` types, `a` equals `b` does not imply that `++a` equals `++b`. (Equality does not guarantee the substitution property or referential transparency.) Algorithms on weakly incrementable types should never attempt to pass through the same incrementable value twice. They should be single pass algorithms. These algorithms can be used with `istream`s as the source of the input data through the `istream_iterator` class template. — *end note* ]



### 6.2.5 Concept Incrementable

[iterators.incrementable]

- <sup>1</sup> The **Incrementable** concept specifies requirements on types that can be incremented with the pre- and post-increment operators. The increment operations are required to be equality-preserving, and the type is required to be `EqualityComparable`. [*Note*: This requirement supersedes the annotations on the increment expressions in the definition of `WeaklyIncrementable`. — *end note*]

```
template <class I>
concept bool Incrementable() {
    return Regular<I>() &&
        WeaklyIncrementable<I>() &&
        requires(I i) {
            { i++ } -> Same<I>;
        };
}
```

- <sup>2</sup> Let `a` and `b` be incrementable objects of type `I`. Then `Incrementable<I>()` is satisfied if and only if

(2.1) — If `bool(a == b)` then `bool(a++ == b)`.

(2.2) — If `bool(a == b)` then `bool((a++, a) == ++b)`.

- <sup>3</sup> [*Note*: The requirement that `a` equals `b` implies `++a` equals `++b` (which is not true for weakly incrementable types) allows the use of multi-pass one-directional algorithms with types that satisfy `Incrementable`. — *end note*]

### 6.2.6 Concept Iterator

[iterators.iterator]

- <sup>1</sup> The **Iterator** concept forms the basis of the iterator concept taxonomy; every iterator satisfies the `Iterator` requirements. This concept specifies operations for dereferencing and incrementing an iterator. Most algorithms will require additional operations to compare iterators with sentinels (6.2.7), to read (6.2.9) or write (6.2.10) values, or to provide a richer set of iterator movements (6.2.11, 6.2.12, 6.2.13).

```
template <class I>
concept bool Iterator() {
    return WeaklyIncrementable<I>() &&
        requires(I i) {
            { *i } -> auto&&; // Requires: i is dereferenceable
        };
}
```

- <sup>2</sup> [*Note*: The requirement that the result of dereferencing the iterator is deducible from `auto&&` means that it cannot be `void`. — *end note*]

### 6.2.7 Concept Sentinel

[iterators.sentinel]

- <sup>1</sup> The **Sentinel** concept specifies the relationship between an `Iterator` type and a `Semiregular` type whose values denote a range.

```
template <class S, class I>
concept bool Sentinel() {
    return Semiregular<S>() &&
        Iterator<I>() &&
        WeaklyEqualityComparable<S, I>();
}
```

- <sup>2</sup> Let `s` and `i` be values of type `S` and `I` such that `[i,s)` denotes a range. Types `S` and `I` satisfy `Sentinel<S, I>()` if and only if:

- (2.1) —  $i == s$  is well-defined.
- (2.2) — If  $\text{bool}(i != s)$  then  $i$  is dereferenceable and  $[++i, s)$  denotes a range.
- <sup>3</sup> The domain of  $==$  can change over time. Given an iterator  $i$  and sentinel  $s$  such that  $[i, s)$  denotes a range and  $i != s$ ,  $[i, s)$  is not required to continue to denote a range after incrementing any iterator equal to  $i$ . Consequently,  $i == s$  is no longer required to be well-defined.

## 6.2.8 Concept SizedSentinel

[iterators.sizedsentinel]

- <sup>1</sup> The `SizedSentinel` concept specifies requirements on an `Iterator` and a `Sentinel` that allow the use of the `-` operator to compute the distance between them in constant time.

```
template <class S, class I>
constexpr bool disable_sized_sentinel = false;

template <class S, class I>
concept bool SizedSentinel() {
    return Sentinel<S, I>() &&
        !disable_sized_sentinel<remove_cv_t<S>, remove_cv_t<I>> &&
        requires(const I& i, const S& s) {
            { s - i } -> Same<difference_type_t<I>>;
            { i - s } -> Same<difference_type_t<I>>;
        };
}
```

- <sup>2</sup> Let  $i$  be an iterator of type  $I$ , and  $s$  a sentinel of type  $S$  such that  $[i, s)$  denotes a range. Let  $N$  be the smallest number of applications of  $++i$  necessary to make  $\text{bool}(i == s)$  be true. `SizedSentinel<S, I>()` is satisfied if and only if:
- (2.1) — If  $N$  is representable by `difference_type_t<I>`, then  $s - i$  is well-defined and equals  $N$ .
- (2.2) — If  $-N$  is representable by `difference_type_t<I>`, then  $i - s$  is well-defined and equals  $-N$ .
- <sup>3</sup> [Note: `disable_sized_sentinel` provides a mechanism to enable use of sentinels and iterators with the library that meet the syntactic requirements but do not in fact satisfy `SizedSentinel`. A program that instantiates a library template that requires `SizedSentinel` with an iterator type  $I$  and sentinel type  $S$  that meet the syntactic requirements of `SizedSentinel<S, I>()` but do not satisfy `SizedSentinel` is ill-formed with no diagnostic required unless `disable_sized_sentinel<S, I>` evaluates to true (3.3.1.3). — end note]
- <sup>4</sup> [Note: The `SizedSentinel` concept is satisfied by pairs of `RandomAccessIterators` (6.2.13) and by counted iterators and their sentinels (6.7.6.1). — end note]

## 6.2.9 Concept InputIterator

[iterators.input]

- <sup>1</sup> The `InputIterator` concept is a refinement of `Iterator` (6.2.6). It defines requirements for a type whose referenced values can be read (from the requirement for `Readable` (6.2.2)) and which can be both pre- and post-incremented. [Note: Unlike in ISO/IEC 14882, input iterators are not required to satisfy `EqualityComparable` (4.3.3). — end note]

```
template <class I>
concept bool InputIterator() {
    return Iterator<I>() &&
        Readable<I>() &&
        requires(I i, const I ci) {
            typename iterator_category_t<I>;
            requires DerivedFrom<iterator_category_t<I>, input_iterator_tag>();
            { i++ } -> Readable; // not required to be equality preserving
            requires Same<value_type_t<I>, value_type_t<decltype(i++)>>();
        };
}
```

```

    { *ci } -> const value_type_t<I>&;
};
}

```

### 6.2.10 Concept OutputIterator [iterators.output]

- <sup>1</sup> The `OutputIterator` concept is a refinement of `Iterator` (6.2.6). It defines requirements for a type that can be used to write values (from the requirement for `Writable` (6.2.3)) and which can be both pre- and post-incremented. However, output iterators are not required to satisfy `EqualityComparable`.

```

template <class I, class T>
concept bool OutputIterator() {
    return Iterator<I>() && Writable<I, T>();
}

```

- <sup>2</sup> [*Note*: Algorithms on output iterators should never attempt to pass through the same iterator twice. They should be *single pass* algorithms. Algorithms that take output iterators can be used with `ostream_iterator` class as well as with insert iterators and insert pointers. — *end note*]

### 6.2.11 Concept ForwardIterator [iterators.forward]

- <sup>1</sup> The `ForwardIterator` concept refines `InputIterator` (6.2.9), adding equality comparison and the multi-pass guarantee, specified below.

```

template <class I>
concept bool ForwardIterator() {
    return InputIterator<I>() &&
        DerivedFrom<iterator_category_t<I>, forward_iterator_tag>() &&
        Incrementable<I>() &&
        Sentinel<I, I>();
}

```

- <sup>2</sup> The domain of `==` for forward iterators is that of iterators over the same underlying sequence. However, value-initialized iterators of the same type may be compared and shall compare equal to other value-initialized iterators of the same type. [*Note*: Value-initialized iterators behave as if they refer past the end of the same empty sequence. — *end note*]
- <sup>3</sup> Two dereferenceable iterators `a` and `b` of type `X` offer the *multi-pass guarantee* if:
- (3.1) — `a == b` implies `++a == ++b` and
- (3.2) — The expression `([] (X x){++x;}(a), *a)` is equivalent to the expression `*a`.
- <sup>4</sup> [*Note*: The requirement that `a == b` implies `++a == ++b` (which is not true for weaker iterators) and the removal of the restrictions on the number of assignments through a mutable iterator (which applies to output iterators) allow the use of multi-pass one-directional algorithms with forward iterators. — *end note*]

### 6.2.12 Concept BidirectionalIterator [iterators.bidirectional]

- <sup>1</sup> The `BidirectionalIterator` concept refines `ForwardIterator` (6.2.11), and adds the ability to move an iterator backward as well as forward.

```

template <class I>
concept bool BidirectionalIterator() {
    return ForwardIterator<I>() &&
        DerivedFrom<iterator_category_t<I>, bidirectional_iterator_tag>() &&
        requires(I i) {

```

```

        { --i } -> Same<I&>;
        { i-- } -> Same<I>;
    };
}

```

<sup>2</sup> A bidirectional iterator `r` is decrementable if and only if there exists some `s` such that `++s == r`. The expressions `--r` and `r--` are only valid if `r` is decrementable.

<sup>3</sup> Let `a` and `b` be decrementable objects of type `I`. Then `BidirectionalIterator<I>()` is satisfied if and only if:

(3.1) — `&--a == &a`.

(3.2) — If `bool(a == b)`, then `bool(a-- == b)`.

(3.3) — If `bool(a == b)`, then `bool((a--, a) == --b)`.

(3.4) — If `a` is incrementable and `bool(a == b)`, then `bool(--(++a) == b)`.

(3.5) — If `bool(a == b)`, then `bool(++(--a) == b)`.

### 6.2.13 Concept `RandomAccessIterator`

[`iterators.random.access`]

<sup>1</sup> The `RandomAccessIterator` concept refines `BidirectionalIterator` (6.2.12) and adds support for constant-time advancement with `+=`, `+`, `-=`, and `-`, and the computation of distance in constant time with `-`. `RandomAccessIterator` also support array notation via subscripting.

```

template <class I>
concept bool RandomAccessIterator() {
    return BidirectionalIterator<I>() &&
        DerivedFrom<iterator_category_t<I>, random_access_iterator_tag>() &&
        StrictTotallyOrdered<I>() &&
        SizedSentinel<I, I>() &&
        requires(I i, const I j, const difference_type_t<I> n) {
            { i += n } -> Same<I&>;
            { j + n } -> Same<I>;
            { n + j } -> Same<I>;
            { i -= n } -> Same<I&>;
            { j - n } -> Same<I>;
            { j[n] } -> Same<reference_t<I>>;
        };
}

```

<sup>2</sup> Let `a` and `b` be valid iterators of type `I` such that `b` is reachable from `a`. Let `n` be the smallest value of type `difference_type_t<I>` such that after `n` applications of `++a`, then `bool(a == b)`. Then `RandomAccessIterator<I>()` is satisfied if and only if:

(2.1) — `(a += n)` is equal to `b`.

(2.2) — `&(a += n)` is equal to `&a`.

(2.3) — `(a + n)` is equal to `(a += n)`.

(2.4) — For any two positive integers `x` and `y`, if `a + (x + y)` is valid, then `a + (x + y)` is equal to `(a + x) + y`.

(2.5) — `a + 0` is equal to `a`.

(2.6) — If `(a + (n - 1))` is valid, then `a + n` is equal to `++(a + (n - 1))`.

- (2.7) — (b += -n) is equal to a.
- (2.8) — (b -= n) is equal to a.
- (2.9) — &(b -= n) is equal to &b.
- (2.10) — (b - n) is equal to (b -= n).
- (2.11) — If b is dereferenceable, then a[n] is valid and is equal to \*b.

### 6.3 Indirect callable requirements

[indirectcallable]

#### 6.3.1 In general

[indirectcallable.general]

- <sup>1</sup> There are several concepts that group requirements of algorithms that take callable objects (ISO/IEC 14882:2014 §20.9.2) as arguments.

#### 6.3.2 Indirect callables

[indirectcallable.indirectinvocable]

- <sup>1</sup> The indirect callable concepts are used to constrain those algorithms that accept callable objects (ISO/IEC 14882:2014 §20.9.1) as arguments.

```

template <class F>
concept bool IndirectInvocable() {
    return Invocable<F>();
}
template <class F, class I>
concept bool IndirectInvocable() {
    return Readable<I>() &&
        Invocable<F, value_type_t<I>>() &&
        Invocable<F, reference_t<I>>() &&
        Invocable<F, iter_common_reference_t<I>>();
}
template <class F, class I1, class I2>
concept bool IndirectInvocable() {
    return Readable<I1>() && Readable<I2>() &&
        Invocable<F, value_type_t<I1>, value_type_t<I2>>() &&
        Invocable<F, value_type_t<I1>, reference_t<I2>>() &&
        Invocable<F, reference_t<I1>, value_type_t<I2>>() &&
        Invocable<F, reference_t<I1>, reference_t<I2>>() &&
        Invocable<F, iter_common_reference_t<I1>, iter_common_reference_t<I2>>();
}

template <class F>
concept bool IndirectRegularInvocable() {
    return RegularInvocable<F>();
}
template <class F, class I>
concept bool IndirectRegularInvocable() {
    return Readable<I>() &&
        RegularInvocable<F, value_type_t<I>>() &&
        RegularInvocable<F, reference_t<I>>() &&
        RegularInvocable<F, iter_common_reference_t<I>>();
}
template <class F, class I1, class I2>
concept bool IndirectRegularInvocable() {
    return Readable<I1>() && Readable<I2>() &&
        RegularInvocable<F, value_type_t<I1>, value_type_t<I2>>() &&

```

```

    RegularInvocable<F, value_type_t<I1>, reference_t<I2>>() &&
    RegularInvocable<F, reference_t<I1>, value_type_t<I2>>() &&
    RegularInvocable<F, reference_t<I1>, reference_t<I2>>() &&
    RegularInvocable<F, iter_common_reference_t<I1>, iter_common_reference_t<I2>>());
}

template <class F, class I>
concept bool IndirectPredicate() {
    return Readable<I>() &&
        Predicate<F, value_type_t<I>>() &&
        Predicate<F, reference_t<I>>() &&
        Predicate<F, iter_common_reference_t<I>>();
}

template <class F, class I1, class I2>
concept bool IndirectPredicate() {
    return Readable<I1>() && Readable<I2>() &&
        Predicate<F, value_type_t<I1>, value_type_t<I2>>() &&
        Predicate<F, value_type_t<I1>, reference_t<I2>>() &&
        Predicate<F, reference_t<I1>, value_type_t<I2>>() &&
        Predicate<F, reference_t<I1>, reference_t<I2>>() &&
        Predicate<F, iter_common_reference_t<I1>, iter_common_reference_t<I2>>();
}

template <class F, class I1, class I2 = I1>
concept bool IndirectRelation() {
    return Readable<I1>() && Readable<I2>() &&
        Relation<F, value_type_t<I1>, value_type_t<I2>>() &&
        Relation<F, value_type_t<I1>, reference_t<I2>>() &&
        Relation<F, reference_t<I1>, value_type_t<I2>>() &&
        Relation<F, reference_t<I1>, reference_t<I2>>() &&
        Relation<F, iter_common_reference_t<I1>, iter_common_reference_t<I2>>();
}

template <class F, class I1, class I2 = I1>
concept bool IndirectStrictWeakOrder() {
    return Readable<I1>() && Readable<I2>() &&
        StrictWeakOrder<F, value_type_t<I1>, value_type_t<I2>>() &&
        StrictWeakOrder<F, value_type_t<I1>, reference_t<I2>>() &&
        StrictWeakOrder<F, reference_t<I1>, value_type_t<I2>>() &&
        StrictWeakOrder<F, reference_t<I1>, reference_t<I2>>() &&
        StrictWeakOrder<F, iter_common_reference_t<I1>, iter_common_reference_t<I2>>();
}

template <class> struct indirect_result_of { };

template <class F, class... Is>
requires IndirectInvocable<F, Is...>()
struct indirect_result_of<F(Is...)> :
    result_of<F(reference_t<Is>...)> { };

template <class F>
using indirect_result_of_t
    = typename indirect_result_of<F>::type;

```

### 6.3.3 Class template projected [projected]

- <sup>1</sup> The `projected` class template is intended for use when specifying the constraints of algorithms that accept callable objects and projections. It bundles a `Readable` type `I` and a function `Proj` into a new `Readable` type whose `reference` type is the result of applying `Proj` to the `reference_t` of `I`.

```
template <Readable I, IndirectRegularInvocable<I> Proj>
struct projected {
    using value_type = decay_t<indirect_result_of_t<Proj&(I)>>;
    indirect_result_of_t<Proj&(I)> operator*() const;
};

template <WeaklyIncrementable I, class Proj>
struct difference_type<projected<I, Proj>> {
    using type = difference_type_t<I>;
};
```

- <sup>2</sup> [*Note: `projected` is only used to ease constraints specification. Its member function need not be defined. — end note*]

## 6.4 Common algorithm requirements [commonalгореq]

### 6.4.1 In general [commonalгореq.general]

- <sup>1</sup> There are several additional iterator concepts that are commonly applied to families of algorithms. These group together iterator requirements of algorithm families. There are three relational concepts that specify how element values are transferred between `Readable` and `Writable` types: `IndirectlyMovable`, `IndirectlyCopyable`, and `IndirectlySwappable`. There are three relational concepts for rearrangements: `Permutable`, `Mergeable`, and `Sortable`. There is one relational concept for comparing values from different sequences: `IndirectlyComparable`.
- <sup>2</sup> [*Note: The `equal_to<>` and `less<>` (5.3.2) function types used in the concepts below impose additional constraints on their arguments beyond those that appear explicitly in the concepts' bodies. `equal_to<>` requires its arguments satisfy `EqualityComparable` (4.3.3), and `less<>` requires its arguments satisfy `StrictTotallyOrdered` (4.3.4). — end note*]

### 6.4.2 Concept `IndirectlyMovable` [commonalгореq.indirectlymovable]

- <sup>1</sup> The `IndirectlyMovable` concept specifies the relationship between a `Readable` type and a `Writable` type between which values may be moved.

```
template <class In, class Out>
concept bool IndirectlyMovable() {
    return Readable<In>() &&
        Writable<Out, rvalue_reference_t<In>>();
}
```

- <sup>2</sup> The `IndirectlyMovableStorable` concept augments `IndirectlyMovable` with additional requirements enabling the transfer to be performed through an intermediate object of the `Readable` type's value type.

```
template <class In, class Out>
concept bool IndirectlyMovableStorable() {
    return IndirectlyMovable<In, Out>() &&
        Writable<Out, value_type_t<In>>() &&
        Movable<value_type_t<In>>() &&
        Constructible<value_type_t<In>, rvalue_reference_t<In>>() &&
        Assignable<value_type_t<In>&, rvalue_reference_t<In>>();
}
```

### 6.4.3 Concept IndirectlyCopyable [commonalgoreq.indirectlycopyable]

- <sup>1</sup> The `IndirectlyCopyable` concept specifies the relationship between a `Readable` type and a `Writable` type between which values may be copied.

```
template <class In, class Out>
concept bool IndirectlyCopyable() {
    return Readable<In>() &&
        Writable<Out, reference_t<In>>();
}
```

- <sup>2</sup> The `IndirectlyCopyableStorable` concept augments `IndirectlyCopyable` with additional requirements enabling the transfer to be performed through an intermediate object of the `Readable` type's value type. It also requires the capability to make copies of values.

```
template <class In, class Out>
concept bool IndirectlyCopyableStorable() {
    return IndirectlyCopyable<In, Out>() &&
        Writable<Out, const value_type_t<In>&>() &&
        Copyable<value_type_t<In>>() &&
        Constructible<value_type_t<In>, reference_t<In>>() &&
        Assignable<value_type_t<In>&, reference_t<In>>();
}
```

### 6.4.4 Concept IndirectlySwappable [commonalgoreq.indirectlyswappable]

- <sup>1</sup> The `IndirectlySwappable` concept specifies a swappable relationship between the values referenced by two `Readable` types.

```
template <class I1, class I2 = I1>
concept bool IndirectlySwappable() {
    return Readable<I1>() && Readable<I2>() &&
        requires(const I1 i1, const I2 i2) {
            ranges::iter_swap(i1, i2);
            ranges::iter_swap(i2, i1);
            ranges::iter_swap(i1, i1);
            ranges::iter_swap(i2, i2);
        };
}
```

- <sup>2</sup> Given an object `i1` of type `I1` and an object `i2` of type `I2`, `IndirectlySwappable<I1, I2>()` is satisfied if after `ranges::iter_swap(i1, i2)`, the value of `*i1` is equal to the value of `*i2` before the call, and *vice versa*.

### 6.4.5 Concept IndirectlyComparable [commonalgoreq.indirectlycomparable]

- <sup>1</sup> The `IndirectlyComparable` concept specifies the common requirements of algorithms that compare values from two different sequences.

```
template <class I1, class I2, class R = equal_to<>, class P1 = identity,
        class P2 = identity>
concept bool IndirectlyComparable() {
    return IndirectRelation<R, projected<I1, P1>, projected<I2, P2>>();
}
```



### 6.4.6 Concept Permutable [commonalgoreq.permutable]

- <sup>1</sup> The `Permutable` concept specifies the common requirements of algorithms that reorder elements in place by moving or swapping them.

```
template <class I>
concept bool Permutable() {
    return ForwardIterator<I>() &&
        IndirectlyMovableStorable<I, I>() &&
        IndirectlySwappable<I, I>();
}
```

### 6.4.7 Concept Mergeable [commonalgoreq.mergeable]

- <sup>1</sup> The `Mergeable` concept specifies the requirements of algorithms that merge sorted sequences into an output sequence by copying elements.

```
template <class I1, class I2, class Out,
         class R = less<>, class P1 = identity, class P2 = identity>
concept bool Mergeable() {
    return InputIterator<I1>() &&
        InputIterator<I2>() &&
        WeaklyIncrementable<Out>() &&
        IndirectlyCopyable<I1, Out>() &&
        IndirectlyCopyable<I2, Out>() &&
        IndirectStrictWeakOrder<R, projected<I1, P1>, projected<I2, P2>>();
}
```

### 6.4.8 Concept Sortable [commonalgoreq.sortable]

- <sup>1</sup> The `Sortable` concept specifies the common requirements of algorithms that permute sequences into ordered sequences (e.g., `sort`).

```
template <class I, class R = less<>, class P = identity>
concept bool Sortable() {
    return Permutable<I>() &&
        IndirectStrictWeakOrder<R, projected<I, P>>();
}
```

## 6.5 Header `<experimental/ranges/iterator>` synopsis [iterator.synopsis]

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    // 6.6, primitives:
    // exposition only
    template <class T> concept bool _Dereferenceable
        = requires(T& t) { {*t} -> auto&&; };

    // 6.6.1, utilities:
    namespace {
        // 6.6.1.1, iter_move:
        constexpr unspecified iter_move = unspecified ;

        // 6.6.1.2, iter_swap:
        constexpr unspecified iter_swap = unspecified ;
    }

    // 6.6.2, traits:
```

```

template <class> struct difference_type;
template <class> struct value_type;
template <class> struct iterator_category;

template <class T> using difference_type_t
    = typename difference_type<T>::type;

template <class T> using value_type_t
    = typename value_type<T>::type;

template <class T> using iterator_category_t
    = typename iterator_category<T>::type;

template <_Dereferenceable T> using reference_t
    = decltype(*declval<T>());

template <_Dereferenceable T>
    requires see below using rvalue_reference_t
    = decltype(ranges::iter_move(declval<T>()));

template <Readable T> using iter_common_reference_t
    = common_reference_t<reference_t<T>, value_type_t<T>&&>;

template <class I1, class I2> struct is_indirectly_movable;
template <class I1, class I2 = I1> struct is_indirectly_swappable;
template <class I1, class I2> struct is_nothrow_indirectly_movable;
template <class I1, class I2 = I1> struct is_nothrow_indirectly_swappable;

template <class I1, class I2> constexpr bool is_indirectly_movable_v
    = is_indirectly_movable<I1, I2>::value;
template <class I1, class I2> constexpr bool is_indirectly_swappable_v
    = is_indirectly_swappable<I1, I2>::value;
template <class I1, class I2> constexpr bool is_nothrow_indirectly_movable_v
    = is_nothrow_indirectly_movable<I1, I2>::value;
template <class I1, class I2> constexpr bool is_nothrow_indirectly_swappable_v
    = is_nothrow_indirectly_swappable<I1, I2>::value;

template <class Iterator> using iterator_traits = see below;

// 6.6.4, iterator tags:
struct output_iterator_tag { };
struct input_iterator_tag { };
struct forward_iterator_tag : input_iterator_tag { };
struct bidirectional_iterator_tag : forward_iterator_tag { };
struct random_access_iterator_tag : bidirectional_iterator_tag { };

// 6.6.5, iterator operations:
template <Iterator I>
    void advance(I& i, difference_type_t<I> n);
template <Iterator I, Sentinel<I> S>
    void advance(I& i, S bound);
template <Iterator I, Sentinel<I> S>
    difference_type_t<I> advance(I& i, difference_type_t<I> n, S bound);
template <Iterator I, Sentinel<I> S>
    difference_type_t<I> distance(I first, S last);

```

```

template <Iterator I>
  I next(I x, difference_type_t<I> n = 1);
template <Iterator I, Sentinel<I> S>
  I next(I x, S bound);
template <Iterator I, Sentinel<I> S>
  I next(I x, difference_type_t<I> n, S bound);
template <BidirectionalIterator I>
  I prev(I x, difference_type_t<I> n = 1);
template <BidirectionalIterator I>
  I prev(I x, difference_type_t<I> n, I bound);

// 6.7, predefined iterators and sentinels:

// 6.7.1, reverse iterators:
template <BidirectionalIterator I> class reverse_iterator;

template <class I1, class I2>
  requires EqualityComparable<I1, I2>()
  bool operator==(
    const reverse_iterator<I1>& x,
    const reverse_iterator<I2>& y);
template <class I1, class I2>
  requires EqualityComparable<I1, I2>()
  bool operator!=(
    const reverse_iterator<I1>& x,
    const reverse_iterator<I2>& y);
template <class I1, class I2>
  requires StrictTotallyOrdered<I1, I2>()
  bool operator<(
    const reverse_iterator<I1>& x,
    const reverse_iterator<I2>& y);
template <class I1, class I2>
  requires StrictTotallyOrdered<I1, I2>()
  bool operator>(
    const reverse_iterator<I1>& x,
    const reverse_iterator<I2>& y);
template <class I1, class I2>
  requires StrictTotallyOrdered<I1, I2>()
  bool operator>=(
    const reverse_iterator<I1>& x,
    const reverse_iterator<I2>& y);
template <class I1, class I2>
  requires StrictTotallyOrdered<I1, I2>()
  bool operator<=(
    const reverse_iterator<I1>& x,
    const reverse_iterator<I2>& y);

template <class I1, class I2>
  requires SizedSentinel<I1, I2>()
  difference_type_t<I2> operator-(
    const reverse_iterator<I1>& x,
    const reverse_iterator<I2>& y);
template <RandomAccessIterator I>
  reverse_iterator<I>
  operator+(

```

```

    difference_type_t<I> n,
    const reverse_iterator<I>& x);

template <BidirectionalIterator I>
    reverse_iterator<I> make_reverse_iterator(I i);

// 6.7.2, insert iterators:
template <class Container> class back_insert_iterator;
template <class Container>
    back_insert_iterator<Container> back_inserter(Container& x);

template <class Container> class front_insert_iterator;
template <class Container>
    front_insert_iterator<Container> front_inserter(Container& x);

template <class Container> class insert_iterator;
template <class Container>
    insert_iterator<Container> inserter(Container& x, iterator_t<Container> i);

// 6.7.3, move iterators and sentinels:
template <InputIterator I> class move_iterator;
template <class I1, class I2>
    requires EqualityComparable<I1, I2>()
    bool operator==(
        const move_iterator<I1>& x, const move_iterator<I2>& y);
template <class I1, class I2>
    requires EqualityComparable<I1, I2>()
    bool operator!=(
        const move_iterator<I1>& x, const move_iterator<I2>& y);
template <class I1, class I2>
    requires StrictTotallyOrdered<I1, I2>()
    bool operator<(
        const move_iterator<I1>& x, const move_iterator<I2>& y);
template <class I1, class I2>
    requires StrictTotallyOrdered<I1, I2>()
    bool operator<=(
        const move_iterator<I1>& x, const move_iterator<I2>& y);
template <class I1, class I2>
    requires StrictTotallyOrdered<I1, I2>()
    bool operator>(
        const move_iterator<I1>& x, const move_iterator<I2>& y);
template <class I1, class I2>
    requires StrictTotallyOrdered<I1, I2>()
    bool operator>=(
        const move_iterator<I1>& x, const move_iterator<I2>& y);

template <class I1, class I2>
    requires SizedSentinel<I1, I2>()
    difference_type_t<I2> operator-(
        const move_iterator<I1>& x,
        const move_iterator<I2>& y);
template <RandomAccessIterator I>
    move_iterator<I>
    operator+(
        difference_type_t<I> n,

```

```

    const move_iterator<I>& x);
template <InputIterator I>
    move_iterator<I> make_move_iterator(I i);

template <Semiregular S> class move_sentinel;

template <class I, Sentinel<I> S>
    bool operator==(
        const move_iterator<I>& i, const move_sentinel<S>& s);
template <class I, Sentinel<I> S>
    bool operator==(
        const move_sentinel<S>& s, const move_iterator<I>& i);
template <class I, Sentinel<I> S>
    bool operator!=(
        const move_iterator<I>& i, const move_sentinel<S>& s);
template <class I, Sentinel<I> S>
    bool operator!=(
        const move_sentinel<S>& s, const move_iterator<I>& i);

template <class I, SizedSentinel<I> S>
    difference_type_t<I> operator-(
        const move_sentinel<S>& s, const move_iterator<I>& i);
template <class I, SizedSentinel<I> S>
    difference_type_t<I> operator-(
        const move_iterator<I>& i, const move_sentinel<S>& s);

template <Semiregular S>
    move_sentinel<S> make_move_sentinel(S s);

// 6.7.4, common iterators:
template <Iterator I, Sentinel<I> S>
    requires !Same<I, S>()
class common_iterator;

template <Readable I, class S>
struct value_type<common_iterator<I, S>>;

template <InputIterator I, class S>
struct iterator_category<common_iterator<I, S>>;

template <ForwardIterator I, class S>
struct iterator_category<common_iterator<I, S>>;

template <class I1, class I2, Sentinel<I2> S1, Sentinel<I1> S2>
bool operator==(
    const common_iterator<I1, S1>& x, const common_iterator<I2, S2>& y);
template <class I1, class I2, Sentinel<I2> S1, Sentinel<I1> S2>
    requires EqualityComparable<I1, I2>()
bool operator==(
    const common_iterator<I1, S1>& x, const common_iterator<I2, S2>& y);
template <class I1, class I2, Sentinel<I2> S1, Sentinel<I1> S2>
bool operator!=(
    const common_iterator<I1, S1>& x, const common_iterator<I2, S2>& y);

template <class I2, SizedSentinel<I2> I1, SizedSentinel<I2> S1, SizedSentinel<I1> S2>

```

```

difference_type_t<I2> operator-(
    const common_iterator<I1, S1>& x, const common_iterator<I2, S2>& y);

// 6.7.5, default sentinels:
class default_sentinel;

// 6.7.6, counted iterators:
template <Iterator I> class counted_iterator;

template <class I1, class I2>
    requires Common<I1, I2>()
    bool operator==(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);
    bool operator==(
        const counted_iterator<auto>& x, default_sentinel);
    bool operator==(
        default_sentinel, const counted_iterator<auto>& x);
template <class I1, class I2>
    requires Common<I1, I2>()
    bool operator!=(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);
    bool operator!=(
        const counted_iterator<auto>& x, default_sentinel y);
    bool operator!=(
        default_sentinel x, const counted_iterator<auto>& y);
template <class I1, class I2>
    requires Common<I1, I2>()
    bool operator<(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);
template <class I1, class I2>
    requires Common<I1, I2>()
    bool operator<=(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);
template <class I1, class I2>
    requires Common<I1, I2>()
    bool operator>(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);
template <class I1, class I2>
    requires Common<I1, I2>()
    bool operator>=(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);
template <class I1, class I2>
    requires Common<I1, I2>()
    difference_type_t<I2> operator-(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);
template <class I>
    difference_type_t<I> operator-(
        const counted_iterator<I>& x, default_sentinel y);
template <class I>
    difference_type_t<I> operator-(
        default_sentinel x, const counted_iterator<I>& y);
template <RandomAccessIterator I>
    counted_iterator<I>
        operator+(difference_type_t<I> n, const counted_iterator<I>& x);
template <Iterator I>

```

```

    counted_iterator<I> make_counted_iterator(I i, difference_type_t<I> n);

template <Iterator I>
    void advance(counted_iterator<I>& i, difference_type_t<I> n);

// 6.7.8, unreachable sentinels:
class unreachable;
template <Iterator I>
    constexpr bool operator==(const I&, unreachable) noexcept;
template <Iterator I>
    constexpr bool operator==(unreachable, const I&) noexcept;
template <Iterator I>
    constexpr bool operator!=(const I&, unreachable) noexcept;
template <Iterator I>
    constexpr bool operator!=(unreachable, const I&) noexcept;

// 6.7.7, dangling wrapper:
template <class T> class dangling;

// 6.8, stream iterators:
template <class T, class charT = char, class traits = char_traits<charT>,
    class Distance = ptrdiff_t>
class istream_iterator;
template <class T, class charT, class traits, class Distance>
    bool operator==(const istream_iterator<T, charT, traits, Distance>& x,
        const istream_iterator<T, charT, traits, Distance>& y);
template <class T, class charT, class traits, class Distance>
    bool operator==(default_sentinel x,
        const istream_iterator<T, charT, traits, Distance>& y);
template <class T, class charT, class traits, class Distance>
    bool operator==(const istream_iterator<T, charT, traits, Distance>& x,
        default_sentinel y);
template <class T, class charT, class traits, class Distance>
    bool operator!=(const istream_iterator<T, charT, traits, Distance>& x,
        const istream_iterator<T, charT, traits, Distance>& y);
template <class T, class charT, class traits, class Distance>
    bool operator!=(default_sentinel x,
        const istream_iterator<T, charT, traits, Distance>& y);
template <class T, class charT, class traits, class Distance>
    bool operator!=(const istream_iterator<T, charT, traits, Distance>& x,
        default_sentinel y);

template <class T, class charT = char, class traits = char_traits<charT>>
    class ostream_iterator;

template <class charT, class traits = char_traits<charT> >
    class istreambuf_iterator;
template <class charT, class traits>
    bool operator==(const istreambuf_iterator<charT, traits>& a,
        const istreambuf_iterator<charT, traits>& b);
template <class charT, class traits>
    bool operator==(default_sentinel a,
        const istreambuf_iterator<charT, traits>& b);
template <class charT, class traits>
    bool operator==(const istreambuf_iterator<charT, traits>& a,

```

```

        default_sentinel b);
template <class charT, class traits>
    bool operator!=(const istreambuf_iterator<charT, traits>& a,
        const istreambuf_iterator<charT, traits>& b);
template <class charT, class traits>
    bool operator!=(default_sentinel a,
        const istreambuf_iterator<charT, traits>& b);
template <class charT, class traits>
    bool operator!=(const istreambuf_iterator<charT, traits>& a,
        default_sentinel b);

template <class charT, class traits = char_traits<charT> >
    class ostreambuf_iterator;

// 6.10, range access:
namespace {
    constexpr unspecified begin = unspecified ;
    constexpr unspecified end = unspecified ;
    constexpr unspecified cbegin = unspecified ;
    constexpr unspecified cend = unspecified ;
    constexpr unspecified rbegin = unspecified ;
    constexpr unspecified rend = unspecified ;
    constexpr unspecified crbegin = unspecified ;
    constexpr unspecified crend = unspecified ;
}

// 6.11, range primitives:
namespace {
    constexpr unspecified size = unspecified ;
    constexpr unspecified empty = unspecified ;
    constexpr unspecified data = unspecified ;
    constexpr unspecified cdata = unspecified ;
}
template <Range R>
difference_type_t<iterator_t<R>> distance(R&& r);
template <SizedRange R>
difference_type_t<iterator_t<R>> distance(R&& r);
}}}}

namespace std {
    // 6.6.3, iterator traits:
    template <experimental::ranges::Iterator I>
        struct iterator_traits;
    template <experimental::ranges::InputIterator I>
        struct iterator_traits;
    template <experimental::ranges::InputIterator I>
        requires Sentinel<I, I>()
        struct iterator_traits;
}

```

<sup>1</sup> Any entities declared or defined in namespace `std` in header `<iterator>` that are not already defined in namespace `std::experimental::ranges` in header `<experimental/ranges/iterator>` are imported with



*using-declarations* (ISO/IEC 14882:2014 §7.3.3).

## 6.6 Iterator primitives [iterator.primitives]

<sup>1</sup> To simplify the task of defining iterators, the library provides several classes and functions:

### 6.6.1 Iterator utilities [iterator.utils]

#### 6.6.1.1 `iter_move` [iterator.utils.iter\_move]

<sup>1</sup> The name `iter_move` denotes a *customization point object* (3.3.2.3). The effect of the expression `ranges::iter_move(E)` for some expression `E` is equivalent to `iter_move(E)`, with overload resolution (ISO/IEC 14882:2014 §13.3) performed in a context described below.

<sup>2</sup> The context in which the expression `iter_move(E)` is evaluated

- (2.1) — does not include a declaration of `ranges::iter_move`,
- (2.2) — includes the lookup set produced by argument-dependent lookup (ISO/IEC 14882:2014 §3.4.2), and
- (2.3) — includes an `iter_move` function template equivalent to the following:

```
// exposition only
```

```
template <_Dereferenceable I>
see below iter_move(I&& r) noexcept(see below);
```

<sup>3</sup> The return type is `Ret` where `Ret` is `remove_reference_t<reference_t<I>>&&` if `reference_t<I>` is a reference type; `decay_t<reference_t<I>>`, otherwise.

<sup>4</sup> The expression in the `noexcept` is equivalent to:

```
noexcept(static_cast<Ret>(*r))
```

<sup>5</sup> *Effects:* Equivalent to: `return static_cast<Ret>(*r);`

<sup>6</sup> If, for the `iter_move` function selected by overload resolution, `iter_move(E)` does not equal `*E`, the program is ill-formed with no diagnostic required.

#### 6.6.1.2 `iter_swap` [iterator.utils.iter\_swap]

<sup>1</sup> The name `iter_swap` denotes a *customization point object* (3.3.2.3). The effect of the expression `ranges::iter_swap(E1, E2)` for some expressions `E1` and `E2` is equivalent to `(void)iter_swap(E1, E2)`, with overload resolution (ISO/IEC 14882:2014 §13.3) performed in a context described below:

<sup>2</sup> The context in which the expression `(void)iter_swap(E1, E2)` is evaluated

- (2.1) — does not include a declaration of `ranges::iter_swap`,
- (2.2) — includes the lookup set produced by argument-dependent lookup (ISO/IEC 14882:2014 §3.4.2), and
- (2.3) — includes `iter_swap` function template(s) equivalent to the following:

```
// exposition only
```

```
template <class I1, class I2>
void iter_swap(I1&&, I2&&) = delete;
```

```
// exposition only
```

```
template <class I1, class I2,
    Readable_R1 = remove_reference_t<I1>,
    Readable_R2 = remove_reference_t<I2>>
    requires Swappable<reference_t<_R1>, reference_t<_R2>>>()
void iter_swap(I1&& r1, I2&& r2)
    noexcept(is_nothrow_swappable_with_v<reference_t<_R1>, reference_t<_R2>>);
```

3 *Effects:* Equivalent to `ranges::swap(*r1, *r2)`.

```
template <class I1, class I2,
  Readable _R1 = std::remove_reference_t<I1>,
  Readable _R2 = std::remove_reference_t<I2>>
  requires !Swappable<reference_t<_R1>, reference_t<_R2>>()
    && IndirectlyMovableStorable<_R1, _R2>() &&
    IndirectlyMovableStorable<_R2, _R1>()
void iter_swap(I1&& r1, I2&& r2)
  noexcept(is_nothrow_indirectly_movable_v<_R1, _R2> &&
    is_nothrow_indirectly_movable_v<_R2, _R1>);
```

4 *Effects:* Exchanges values referred to by two `Readable` objects.

5 [*Example:* Below is a possible implementation:

```
value_type_t<_R1> tmp(iter_move(r1));
*r1 = iter_move(r2);
*r2 = std::move(tmp);
```

— *end example*]

6 If the `iter_swap` function selected by overload resolution does not swap the values denoted by the expressions E1 and E2, the program is ill-formed with no diagnostic required.

## 6.6.2 Iterator traits

[**iterator.traits**]

1 To implement algorithms only in terms of iterators, it is often necessary to determine the value and difference types that correspond to a particular iterator type. Accordingly, it is required that if `WI` is the name of a type that satisfies the `WeaklyIncrementable` concept (6.2.4), `R` is the name of a type that satisfies the `Readable` concept (6.2.2), and `II` is the name of a type that satisfies the `InputIterator` concept (6.2.9) concept, the types

```
difference_type_t<WI>
value_type_t<R>
iterator_category_t<II>
```

be defined as the iterator's difference type, value type and iterator category, respectively.

2 `difference_type_t<T>` is implemented as if:

```
template <class> struct difference_type { };

template <class T>
struct difference_type<T*>
  : enable_if<is_object<T>::value, ptrdiff_t> { };

template <class I>
  requires is_array<I>::value
struct difference_type<I> : difference_type<decay_t<I>> { };

template <class I>
struct difference_type<I const> : difference_type<decay_t<I>> { };

template <class T>
  requires requires { typename T::difference_type; }
struct difference_type<T> {
  using type = typename T::difference_type;
```

```

};

template <class T>
    requires !requires { typename T::difference_type; } &&
    requires(const T& a, const T& b) { { a - b } -> Integral; }
struct difference_type<T>
    : make_signed< decltype(declval<T>() - declval<T>()) > {
};

template <class T>
    using difference_type_t = typename difference_type<T>::type;

```

<sup>3</sup> Users may specialize `difference_type` on user-defined types.

<sup>4</sup> `iterator_category_t<T>` is implemented as if:

```

template <class> struct iterator_category { };

template <class T>
struct iterator_category<T*>
    : enable_if<is_object<T>::value, random_access_iterator_tag> { };

template <class T>
struct iterator_category<T const> : iterator_category<T> { };

template <class T>
    requires requires { typename T::iterator_category; }
struct iterator_category<T> {
    using type = see below;
};

template <class T>
    using iterator_category_t = typename iterator_category<T>::type;

```

<sup>5</sup> Users may specialize `iterator_category` on user-defined types.

<sup>6</sup> If `T::iterator_category` is valid and denotes a type, then the type `iterator_category<T>::type` is computed as follows:

- (6.1) — If `T::iterator_category` is the same as or derives from `std::random_access_iterator_tag`, `iterator_category<T>::type` is `ranges::random_access_iterator_tag`.
- (6.2) — Otherwise, if `T::iterator_category` is the same as or derives from `std::bidirectional_iterator_tag`, `iterator_category<T>::type` is `ranges::bidirectional_iterator_tag`.
- (6.3) — Otherwise, if `T::iterator_category` is the same as or derives from `std::forward_iterator_tag`, `iterator_category<T>::type` is `ranges::forward_iterator_tag`.
- (6.4) — Otherwise, if `T::iterator_category` is the same as or derives from `std::input_iterator_tag`, `iterator_category<T>::type` is `ranges::input_iterator_tag`.
- (6.5) — Otherwise, if `T::iterator_category` is the same as or derives from `std::output_iterator_tag`, `iterator_category<T>` has no nested type.
- (6.6) — Otherwise, `iterator_category<T>::type` is `T::iterator_category`.

<sup>7</sup> `rvalue_reference_t<T>` is implemented as if:

```
template <_Dereferenceable T>
    requires see below using rvalue_reference_t
    = decltype(ranges::iter_move(declval<T&>()));
```

- 8 The expression in the requires clause is equivalent to:

```
requires(T& t) { { ranges::iter_move(t) } -> auto&&; }
```

- 9 The class templates `is_indirectly_movable`, `is_nothrow_indirectly_movable`, `is_indirectly_swappable`, and `is_nothrow_indirectly_swappable` shall be defined as follows:

```
template <class In, class Out>
struct is_indirectly_movable : false_type { };
```

```
template <class In, class Out>
    requires IndirectlyMovable<In, Out>()
struct is_indirectly_movable<In, Out> : true_type { };
```

```
template <class In, class Out>
struct is_nothrow_indirectly_movable : false_type { };
```

```
template <class In, class Out>
    requires IndirectlyMovable<In, Out>()
struct is_nothrow_indirectly_movable<In, Out> :
    std::integral_constant<bool,
        is_nothrow_constructible<value_type_t<In>, rvalue_reference_t<In>::value &&
        is_nothrow_assignable<value_type_t<In> &, rvalue_reference_t<In>::value &&
        is_nothrow_assignable<reference_t<Out>, rvalue_reference_t<In>::value &&
        is_nothrow_assignable<reference_t<Out>, value_type_t<In>::value>
    { };
```

```
template <class I1, class I2 = I1>
struct is_indirectly_swappable : false_type { };
```

```
template <class I1, class I2>
    requires IndirectlySwappable<I1, I2>()
struct is_indirectly_swappable<I1, I2> : true_type { };
```

```
template <class I1, class I2 = I1>
struct is_nothrow_indirectly_swappable : false_type { };
```

```
template <class I1, class I2>
    requires IndirectlySwappable<I1, I2>()
struct is_nothrow_indirectly_swappable<I1, I2> :
    std::integral_constant<bool,
        noexcept(ranges::iter_swap(declval<I1&>(), declval<I2&>())) &&
        noexcept(ranges::iter_swap(declval<I2&>(), declval<I1&>())) &&
        noexcept(ranges::iter_swap(declval<I1&>(), declval<I1&>())) &&
        noexcept(ranges::iter_swap(declval<I2&>(), declval<I2&>()))>
    { };
```

- 10 For the sake of backwards compatibility, this document specifies the existence of an `iterator_traits` alias that collects an iterator's associated types. It is defined as if:

```
template <InputIterator I> struct __pointer_type { // exposition only
    using type = add_pointer_t<reference_t<I>>;
};
```

```

template <InputIterator I>
  requires requires(I i) { { i.operator->() } -> auto&&; }
struct __pointer_type<I> { // exposition only
  using type = decltype(declval<I>().operator->());
};
template <class> struct __iterator_traits { }; // exposition only
template <Iterator I> struct __iterator_traits<I> {
  using difference_type = difference_type_t<I>;
  using value_type = void;
  using reference = void;
  using pointer = void;
  using iterator_category = output_iterator_tag;
};
template <InputIterator I> struct __iterator_traits<I> { // exposition only
  using difference_type = difference_type_t<I>;
  using value_type = value_type_t<I>;
  using reference = reference_t<I>;
  using pointer = typename __pointer_type<I>::type;
  using iterator_category = iterator_category_t<I>;
};
template <class I>
  using iterator_traits = __iterator_traits<I>;

```

<sup>11</sup> [Note: `iterator_traits` is an alias template to prevent user code from specializing it. — end note]

<sup>12</sup> [Example: To implement a generic `reverse` function, a C++ program can do the following:

```

template <BidirectionalIterator I>
void reverse(I first, I last) {
  difference_type_t<I> n = distance(first, last);
  --n;
  while(n > 0) {
    value_type_t<I> tmp = *first;
    *first++ = *--last;
    *last = tmp;
    n -- 2;
  }
}

```

— end example]

### 6.6.3 Standard iterator traits

[`iterator.traits`]

- <sup>1</sup> To facilitate interoperability between new code using iterators conforming to this document and older code using iterators that conform to the iterator requirements specified in ISO/IEC 14882, three specializations of `std::iterator_traits` are provided to map the newer iterator categories and associated types to the older ones.

```

namespace std {
  template <experimental::ranges::Iterator Out>
  struct iterator_traits<Out> {
    using difference_type = experimental::ranges::difference_type_t<Out>;
    using value_type = see below;
    using reference = see below;
    using pointer = see below;
    using iterator_category = std::output_iterator_tag;
  };
}

```

2 The nested type `value_type` is computed as follows:

- (2.1) — If `Out::value_type` is valid and denotes a type, then `std::iterator_traits<Out>::value_type` is `Out::value_type`.
- (2.2) — Otherwise, `std::iterator_traits<Out>::value_type` is void.

3 The nested type `reference` is computed as follows:

- (3.1) — If `Out::reference` is valid and denotes a type, then `std::iterator_traits<Out>::reference` is `Out::reference`.
- (3.2) — Otherwise, `std::iterator_traits<Out>::reference` is void.

4 The nested type `pointer` is computed as follows:

- (4.1) — If `Out::pointer` is valid and denotes a type, then `std::iterator_traits<Out>::pointer` is `Out::pointer`.
- (4.2) — Otherwise, `std::iterator_traits<Out>::pointer` is void.

```
template <experimental::ranges::InputIterator In>
struct iterator_traits<In> { };

template <experimental::ranges::InputIterator In>
requires Sentinel<In, In>()
struct iterator_traits<In> {
    using difference_type    = experimental::ranges::difference_type_t<In>;
    using value_type        = experimental::ranges::value_type_t<In>;
    using reference         = see below;
    using pointer           = see below;
    using iterator_category = see below;
};
```

5 The nested type `reference` is computed as follows:

- (5.1) — If `In::reference` is valid and denotes a type, then `std::iterator_traits<In>::reference` is `In::reference`.
- (5.2) — Otherwise, `std::iterator_traits<In>::reference` is `experimental::ranges::reference_t<In>`.

6 The nested type `pointer` is computed as follows:

- (6.1) — If `In::pointer` is valid and denotes a type, then `std::iterator_traits<In>::pointer` is `In::pointer`.
- (6.2) — Otherwise, `std::iterator_traits<In>::pointer` is `experimental::ranges::iterator_traits<In>::pointer`.

7 Let type `C` be `experimental::ranges::iterator_category_t<In>`. The nested type `std::iterator_traits<In>::iterator_category` is computed as follows:

- (7.1) — If `C` is the same as or inherits from `std::input_iterator_tag` or `std::output_iterator_tag`, `std::iterator_traits<In>::iterator_category` is `C`.

- (7.2) — Otherwise, if `experimental::ranges::reference_t<In>` is not a reference type, `std::iterator_traits<In>::iterator_category` is `std::input_iterator_tag`.
- (7.3) — Otherwise, if `C` is the same as or inherits from `experimental::ranges::random_access_iterator_tag`, `std::iterator_traits<In>::iterator_category` is `std::random_access_iterator_tag`.
- (7.4) — Otherwise, if `C` is the same as or inherits from `experimental::ranges::bidirectional_iterator_tag`, `std::iterator_traits<In>::iterator_category` is `std::bidirectional_iterator_tag`.
- (7.5) — Otherwise, if `C` is the same as or inherits from `experimental::ranges::forward_iterator_tag`, `std::iterator_traits<In>::iterator_category` is `std::forward_iterator_tag`.
- (7.6) — Otherwise, `std::iterator_traits<In>::iterator_category` is `std::input_iterator_tag`.

<sup>8</sup> [*Note:* Some implementations may find it necessary to add additional constraints to these partial specializations to prevent them from being considered for types that conform to the iterator requirements specified in ISO/IEC 14882. — *end note*]

## 6.6.4 Standard iterator tags

[`std.iterator.tags`]

<sup>1</sup> It is often desirable for a function template specialization to find out what is the most specific category of its iterator argument, so that the function can select the most efficient algorithm at compile time. To facilitate this, the library introduces *category tag* classes which can be used as compile time tags for algorithm selection. [*Note:* The preferred way to dispatch to more specialized algorithm implementations is with concept-based overloading. — *end note*] The category tags are: `input_iterator_tag`, `output_iterator_tag`, `forward_iterator_tag`, `bidirectional_iterator_tag` and `random_access_iterator_tag`. For every input iterator of type `I`, `iterator_category_t<I>` shall be defined to be the most specific category tag that describes the iterator's behavior.

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    struct output_iterator_tag { };
    struct input_iterator_tag { };
    struct forward_iterator_tag : input_iterator_tag { };
    struct bidirectional_iterator_tag : forward_iterator_tag { };
    struct random_access_iterator_tag : bidirectional_iterator_tag { };
}}}}
```

<sup>2</sup> [*Note:* The `output_iterator_tag` is provided for the sake of backward compatibility. — *end note*]

<sup>3</sup> [*Example:* For a program-defined iterator `BinaryTreeIterator`, it could be included into the `bidirectional_iterator` category by specializing the `difference_type`, `value_type`, and `iterator_category` templates:

```
template <class T> struct difference_type<BinaryTreeIterator<T>> {
    using type = std::ptrdiff_t;
};
template <class T> struct value_type<BinaryTreeIterator<T>> {
    using type = T;
};
template <class T> struct iterator_category<BinaryTreeIterator<T>> {
    using type = bidirectional_iterator_tag;
};
```

— *end example*]

### 6.6.5 Iterator operations

[iterator.operations]

- 1 Since only types that satisfy `RandomAccessIterator` provide the `+` operator, and types that satisfy `SizedSentinel` provide the `-` operator, the library provides four function templates `advance`, `distance`, `next`, and `prev`. These function templates use `+` and `-` for random access iterators and ranges that satisfy `SizedSentinel`, respectively (and are, therefore, constant time for them); for output, input, forward and bidirectional iterators they use `++` to provide linear time implementations.

```
template <Iterator I>
    void advance(I& i, difference_type_t<I> n);
```

- 2 *Requires:* `n` shall be negative only for bidirectional iterators.
- 3 *Effects:* For random access iterators, equivalent to `i += n`. Otherwise, increments (or decrements for negative `n`) iterator `i` by `n`.

```
template <Iterator I, Sentinel<I> S>
    void advance(I& i, S bound);
```

- 4 *Requires:* If `Assignable<I&, S>()` is not satisfied, `[i, bound)` shall denote a range.
- 5 *Effects:*
- (5.1) — If `Assignable<I&, S>()` is satisfied, equivalent to `i = std::move(bound)`.
- (5.2) — Otherwise, if `SizedSentinel<S, I>()` is satisfied, equivalent to `advance(i, bound - i)`.
- (5.3) — Otherwise, increments `i` until `i == bound`.

```
template <Iterator I, Sentinel<I> S>
    difference_type_t<I> advance(I& i, difference_type_t<I> n, S bound);
```

- 6 *Requires:* If `n > 0`, `[i, bound)` shall denote a range. If `n == 0`, `[i, bound)` or `[bound, i)` shall denote a range. If `n < 0`, `[bound, i)` shall denote a range and `(BidirectionalIterator<I>() && Same<I, S>())` shall be satisfied.
- 7 *Effects:*
- (7.1) — If `SizedSentinel<S, I>()` is satisfied:
- (7.1.1) — If `|n| >= |bound - i|`, equivalent to `advance(i, bound)`.
- (7.1.2) — Otherwise, equivalent to `advance(i, n)`.
- (7.2) — Otherwise, increments (or decrements for negative `n`) iterator `i` either `n` times or until `i == bound`, whichever comes first.

- 8 *Returns:* `n - M`, where `M` is the distance from the starting position of `i` to the ending position.

```
template <Iterator I, Sentinel<I> S>
    difference_type_t<I> distance(I first, S last);
```

- 9 *Requires:* `[first, last)` shall denote a range, or `(Same<S, I>() && SizedSentinel<S, I>())` shall be satisfied and `[last, first)` shall denote a range.
- 10 *Effects:* If `SizedSentinel<S, I>()` is satisfied, returns `(last - first)`; otherwise, returns the number of increments needed to get from `first` to `last`.

```
template <Iterator I>
    I next(I x, difference_type_t<I> n = 1);
```

- 11 *Effects:* Equivalent to: `advance(x, n); return x;`



```
template <Iterator I, Sentinel<I> S>
  I next(I x, S bound);
```

12 *Effects:* Equivalent to: `advance(x, bound); return x;`

```
template <Iterator I, Sentinel<I> S>
  I next(I x, difference_type_t<I> n, S bound);
```

13 *Effects:* Equivalent to: `advance(x, n, bound); return x;`

```
template <BidirectionalIterator I>
  I prev(I x, difference_type_t<I> n = 1);
```

14 *Effects:* Equivalent to: `advance(x, -n); return x;`

```
template <BidirectionalIterator I>
  I prev(I x, difference_type_t<I> n, I bound);
```

15 *Effects:* Equivalent to: `advance(x, -n, bound); return x;`

## 6.7 Iterator adaptors

[iterators.predef]

### 6.7.1 Reverse iterators

[iterators.reverse]

<sup>1</sup> Class template `reverse_iterator` is an iterator adaptor that iterates from the end of the sequence defined by its underlying iterator to the beginning of that sequence. The fundamental relation between a reverse iterator and its corresponding underlying iterator `i` is established by the identity: `*make_reverse_iterator(i) == *prev(i)`.

#### 6.7.1.1 Class template `reverse_iterator`

[reverse.iterator]

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
  template <BidirectionalIterator I>
  class reverse_iterator {
  public:
    using iterator_type = I;
    using difference_type = difference_type_t<I>;
    using value_type = value_type_t<I>;
    using iterator_category = iterator_category_t<I>;
    using reference = reference_t<I>;
    using pointer = I;

    reverse_iterator();
    explicit reverse_iterator(I x);
    reverse_iterator(const reverse_iterator<ConvertibleTo<I>>& i);
    reverse_iterator& operator=(const reverse_iterator<ConvertibleTo<I>>& i);

    I base() const;
    reference operator*() const;
    pointer operator->() const;

    reverse_iterator& operator++();
    reverse_iterator operator++(int);
    reverse_iterator& operator--();
    reverse_iterator operator--(int);

    reverse_iterator operator+ (difference_type n) const
      requires RandomAccessIterator<I>();
    reverse_iterator& operator+=(difference_type n)
```

```

    requires RandomAccessIterator<I>();
reverse_iterator operator- (difference_type n) const
    requires RandomAccessIterator<I>();
reverse_iterator& operator-=(difference_type n)
    requires RandomAccessIterator<I>();
reference operator[](difference_type n) const
    requires RandomAccessIterator<I>();
private:
    I current; // exposition only
};

template <class I1, class I2>
    requires EqualityComparable<I1, I2>()
    bool operator==(
        const reverse_iterator<I1>& x,
        const reverse_iterator<I2>& y);
template <class I1, class I2>
    requires EqualityComparable<I1, I2>()
    bool operator!=(
        const reverse_iterator<I1>& x,
        const reverse_iterator<I2>& y);
template <class I1, class I2>
    requires StrictTotallyOrdered<I1, I2>()
    bool operator<(
        const reverse_iterator<I1>& x,
        const reverse_iterator<I2>& y);
template <class I1, class I2>
    requires StrictTotallyOrdered<I1, I2>()
    bool operator>(
        const reverse_iterator<I1>& x,
        const reverse_iterator<I2>& y);
template <class I1, class I2>
    requires StrictTotallyOrdered<I1, I2>()
    bool operator>=(
        const reverse_iterator<I1>& x,
        const reverse_iterator<I2>& y);
template <class I1, class I2>
    requires StrictTotallyOrdered<I1, I2>()
    bool operator<=(
        const reverse_iterator<I1>& x,
        const reverse_iterator<I2>& y);
template <class I1, class I2>
    requires SizedSentinel<I1, I2>()
    difference_type_t<I2> operator-(
        const reverse_iterator<I1>& x,
        const reverse_iterator<I2>& y);
template <RandomAccessIterator I>
    reverse_iterator<I>
    operator+(
        difference_type_t<I> n,
        const reverse_iterator<I>& x);

template <BidirectionalIterator I>
    reverse_iterator<I> make_reverse_iterator(I i);
}}}}

```

**6.7.1.2 reverse\_iterator operations** [reverse.iter.ops]**6.7.1.2.1 reverse\_iterator constructor** [reverse.iter.cons]

```
reverse_iterator();
```

- 1 *Effects:* Value-initializes `current`. Iterator operations applied to the resulting iterator have defined behavior if and only if the corresponding operations are defined on a value-initialized iterator of type `I`.

```
explicit reverse_iterator(I x);
```

- 2 *Effects:* Initializes `current` with `x`.

```
reverse_iterator(const reverse_iterator<ConvertibleTo<I>>& i);
```

- 3 *Effects:* Initializes `current` with `i.current`.

**6.7.1.2.2 reverse\_iterator::operator=** [reverse.iter.op=]

```
reverse_iterator&
operator=(const reverse_iterator<ConvertibleTo<I>>& i);
```

- 1 *Effects:* Assigns `i.current` to `current`.

- 2 *Returns:* `*this`.

**6.7.1.2.3 Conversion** [reverse.iter.conv]

```
I base() const;
```

- 1 *Returns:* `current`.

**6.7.1.2.4 operator\*** [reverse.iter.op.star]

```
reference operator*() const;
```

- 1 *Effects:* Equivalent to: `return *prev(current);`

**6.7.1.2.5 operator->** [reverse.iter.opref]

```
pointer operator->() const;
```

- 1 *Effects:* Equivalent to: `return prev(current);`

**6.7.1.2.6 operator++** [reverse.iter.op++]

```
reverse_iterator& operator++();
```

- 1 *Effects:* `--current;`

- 2 *Returns:* `*this`.

```
reverse_iterator operator++(int);
```

- 3 *Effects:*

```
reverse_iterator tmp = *this;
--current;
return tmp;
```

**6.7.1.2.7 operator--**

[reverse.iter.op--]

reverse\_iterator&amp; operator--();

1 *Effects:* ++current2 *Returns:* \*this.

reverse\_iterator operator--(int);

3 *Effects:*

```
reverse_iterator tmp = *this;
++current;
return tmp;
```

**6.7.1.2.8 operator+**

[reverse.iter.op+]

reverse\_iterator

```
operator+(difference_type n) const
requires RandomAccessIterator<I>();
```

1 *Returns:* reverse\_iterator(current-n).**6.7.1.2.9 operator+=**

[reverse.iter.op+=]

reverse\_iterator&amp;

```
operator+=(difference_type n)
requires RandomAccessIterator<I>();
```

1 *Effects:* current -= n;2 *Returns:* \*this.**6.7.1.2.10 operator-**

[reverse.iter.op-]

reverse\_iterator

```
operator-(difference_type n) const
requires RandomAccessIterator<I>();
```

1 *Returns:* reverse\_iterator(current+n).**6.7.1.2.11 operator-=**

[reverse.iter.op-=]

reverse\_iterator&amp;

```
operator-=(difference_type n)
requires RandomAccessIterator<I>();
```

1 *Effects:* current += n;2 *Returns:* \*this.**6.7.1.2.12 operator[]**

[reverse.iter.opindex]

reference operator[] (

```
difference_type n) const
requires RandomAccessIterator<I>();
```

1 *Returns:* current[-n-1].

**6.7.1.2.13 operator==**

[reverse.iter.op==]

```
template <class I1, class I2>
    requires EqualityComparable<I1, I2>()
    bool operator==(
        const reverse_iterator<I1>& x,
        const reverse_iterator<I2>& y);
```

<sup>1</sup> *Effects:* Equivalent to: return x.current == y.current;

**6.7.1.2.14 operator!=**

[reverse.iter.op!=]

```
template <class I1, class I2>
    requires EqualityComparable<I1, I2>()
    bool operator!=(
        const reverse_iterator<I1>& x,
        const reverse_iterator<I2>& y);
```

<sup>1</sup> *Effects:* Equivalent to: return x.current != y.current;

**6.7.1.2.15 operator<**

[reverse.iter.op&lt;]

```
template <class I1, class I2>
    requires StrictTotallyOrdered<I1, I2>()
    bool operator<(
        const reverse_iterator<I1>& x,
        const reverse_iterator<I2>& y);
```

<sup>1</sup> *Effects:* Equivalent to: return x.current > y.current;

**6.7.1.2.16 operator>**

[reverse.iter.op&gt;]

```
template <class I1, class I2>
    requires StrictTotallyOrdered<I1, I2>()
    bool operator>(
        const reverse_iterator<I1>& x,
        const reverse_iterator<I2>& y);
```

<sup>1</sup> *Effects:* Equivalent to: return x.current < y.current;

**6.7.1.2.17 operator>=**

[reverse.iter.op&gt;=]

```
template <class I1, class I2>
    requires StrictTotallyOrdered<I1, I2>()
    bool operator>=(
        const reverse_iterator<I1>& x,
        const reverse_iterator<I2>& y);
```

<sup>1</sup> *Effects:* Equivalent to: return x.current <= y.current;

**6.7.1.2.18 operator<=**

[reverse.iter.op&lt;=]

```
template <class I1, class I2>
    requires StrictTotallyOrdered<I1, I2>()
    bool operator<=(
        const reverse_iterator<I1>& x,
        const reverse_iterator<I2>& y);
```

<sup>1</sup> *Effects:* Equivalent to: return x.current >= y.current;

**6.7.1.2.19 operator-**

[reverse.iter.opdiff]

```
template <class I1, class I2>
    requires SizedSentinel<I1, I2>()
    difference_type_t<I2> operator-(
        const reverse_iterator<I1>& x,
        const reverse_iterator<I2>& y);
```

<sup>1</sup> *Effects:* Equivalent to: `return y.current - x.current;`

**6.7.1.2.20 operator+**

[reverse.iter.opsum]

```
template <RandomAccessIterator I>
    reverse_iterator<I>
    operator+(
        difference_type_t<I> n,
        const reverse_iterator<I>& x);
```

<sup>1</sup> *Effects:* Equivalent to: `return reverse_iterator<I>(x.current - n);`

**6.7.1.2.21 Non-member function make\_reverse\_iterator()**

[reverse.iter.make]

```
template <BidirectionalIterator I>
    reverse_iterator<I> make_reverse_iterator(I i);
```

<sup>1</sup> *Returns:* `reverse_iterator<I>(i)`.

**6.7.2 Insert iterators**

[iterators.insert]

<sup>1</sup> To make it possible to deal with insertion in the same way as writing into an array, a special kind of iterator adaptors, called *insert iterators*, are provided in the library. With regular iterator classes,

```
while (first != last) *result++ = *first++;
```

causes a range `[first,last)` to be copied into a range starting with `result`. The same code with `result` being an insert iterator will insert corresponding elements into the container. This device allows all of the copying algorithms in the library to work in the *insert mode* instead of the *regular overwrite mode*.

<sup>2</sup> An insert iterator is constructed from a container and possibly one of its iterators pointing to where insertion takes place if it is neither at the beginning nor at the end of the container. Insert iterators satisfy `OutputIterator`. `operator*` returns the insert iterator itself. The assignment `operator=(const T& x)` is defined on insert iterators to allow writing into them, it inserts `x` right before where the insert iterator is pointing. In other words, an insert iterator is like a cursor pointing into the container where the insertion takes place. `back_insert_iterator` inserts elements at the end of a container, `front_insert_iterator` inserts elements at the beginning of a container, and `insert_iterator` inserts elements where the iterator points to in a container. `back_inserter`, `front_inserter`, and `inserter` are three functions making the insert iterators out of a container.

**6.7.2.1 Class template back\_insert\_iterator**

[back.insert.iterator]

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    template <class Container>
    class back_insert_iterator {
    public:
        using container_type = Container;
        using difference_type = ptrdiff_t;

        constexpr back_insert_iterator();
        explicit back_insert_iterator(Container& x);
```

```

    back_insert_iterator&
        operator=(const value_type_t<Container>& value);
    back_insert_iterator&
        operator=(value_type_t<Container>&& value);

    back_insert_iterator& operator*();
    back_insert_iterator& operator++();
    back_insert_iterator operator++(int);

private:
    Container* container; // exposition only
};

template <class Container>
    back_insert_iterator<Container> back_inserter(Container& x);
}}}}

```

### 6.7.2.2 back\_insert\_iterator operations

[back.insert.iter.ops]

#### 6.7.2.2.1 back\_insert\_iterator constructor

[back.insert.iter.cons]

```
constexpr back_insert_iterator();
```

1 *Effects:* Value-initializes container.

```
explicit back_insert_iterator(Container& x);
```

2 *Effects:* Initializes container with `std::addressof(x)`.

#### 6.7.2.2.2 back\_insert\_iterator::operator=

[back.insert.iter.op=]

```
back_insert_iterator&
    operator=(const value_type_t<Container>& value);
```

1 *Effects:* Equivalent to `container->push_back(value)`.

2 *Returns:* `*this`.

```
back_insert_iterator&
    operator=(value_type_t<Container>&& value);
```

3 *Effects:* Equivalent to `container->push_back(std::move(value))`.

4 *Returns:* `*this`.

#### 6.7.2.2.3 back\_insert\_iterator::operator\*

[back.insert.iter.op\*]

```
back_insert_iterator& operator*();
```

1 *Returns:* `*this`.

#### 6.7.2.2.4 back\_insert\_iterator::operator++

[back.insert.iter.op++]

```
back_insert_iterator& operator++();
back_insert_iterator operator++(int);
```

1 *Returns:* `*this`.

#### 6.7.2.2.5 back\_inserter

[back.inserter]

```
template <class Container>
    back_insert_iterator<Container> back_inserter(Container& x);
```

1 *Returns:* `back_insert_iterator<Container>(x)`.

### 6.7.2.3 Class template `front_insert_iterator` [front.insert.iterator]

```

namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    template <class Container>
    class front_insert_iterator {
    public:
        using container_type = Container;
        using difference_type = ptrdiff_t;

        constexpr front_insert_iterator();
        explicit front_insert_iterator(Container& x);
        front_insert_iterator&
            operator=(const value_type_t<Container>& value);
        front_insert_iterator&
            operator=(value_type_t<Container>&& value);

        front_insert_iterator& operator*();
        front_insert_iterator& operator++();
        front_insert_iterator operator++(int);

    private:
        Container* container; // exposition only
    };

    template <class Container>
        front_insert_iterator<Container> front_inserter(Container& x);
}}}}

```

### 6.7.2.4 `front_insert_iterator` operations [front.insert.iter.ops]

#### 6.7.2.4.1 `front_insert_iterator` constructor [front.insert.iter.cons]

```
constexpr front_insert_iterator();
```

1 *Effects:* Value-initializes container.

```
explicit front_insert_iterator(Container& x);
```

2 *Effects:* Initializes container with `std::addressof(x)`.

#### 6.7.2.4.2 `front_insert_iterator::operator=` [front.insert.iter.op=]

```
front_insert_iterator&
    operator=(const value_type_t<Container>& value);
```

1 *Effects:* Equivalent to `container->push_front(value)`.

2 *Returns:* `*this`.

```
front_insert_iterator&
    operator=(value_type_t<Container>&& value);
```

3 *Effects:* Equivalent to `container->push_front(std::move(value))`.

4 *Returns:* `*this`.

#### 6.7.2.4.3 `front_insert_iterator::operator*` [front.insert.iter.op\*]

```
front_insert_iterator& operator*();
```

1 *Returns:* `*this`.



**6.7.2.4.4** `front_insert_iterator::operator++` [front.insert.iter.op++]

```
front_insert_iterator& operator++();
front_insert_iterator operator++(int);
```

1 *Returns:* \*this.

**6.7.2.4.5** `front_inserter` [front.inserter]

```
template <class Container>
front_insert_iterator<Container> front_inserter(Container& x);
```

1 *Returns:* `front_insert_iterator<Container>(x)`.

**6.7.2.5** Class template `insert_iterator` [insert.iterator]

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
template <class Container>
class insert_iterator {
public:
using container_type = Container;
using difference_type = ptrdiff_t;

insert_iterator();
insert_iterator(Container& x, iterator_t<Container> i);
insert_iterator&
operator=(const value_type_t<Container>& value);
insert_iterator&
operator=(value_type_t<Container>&& value);

insert_iterator& operator*();
insert_iterator& operator++();
insert_iterator operator++(int);

private:
Container* container; // exposition only
iterator_t<Container> iter; // exposition only
};

template <class Container>
insert_iterator<Container> inserter(Container& x, iterator_t<Container> i);
}}}}
```

**6.7.2.6** `insert_iterator` operations [insert.iter.ops]**6.7.2.6.1** `insert_iterator` constructor [insert.iter.cons]

```
insert_iterator();
```

1 *Effects:* Value-initializes container and iter.

```
insert_iterator(Container& x, iterator_t<Container> i);
```

2 *Requires:* i is an iterator into x.

3 *Effects:* Initializes container with `std::addressof(x)` and iter with i.

**6.7.2.6.2** `insert_iterator::operator=` [insert.iter.op=]

```
insert_iterator&
operator=(const value_type_t<Container>& value);
```

1 *Effects:* Equivalent to:

```
iter = container->insert(iter, value);
++iter;
```

2 *Returns:* \*this.

```
insert_iterator&
operator=(value_type_t<Container>&& value);
```

3 *Effects:* Equivalent to:

```
iter = container->insert(iter, std::move(value));
++iter;
```

4 *Returns:* \*this.

**6.7.2.6.3 insert\_iterator::operator\*** [insert.iter.op\*]

```
insert_iterator& operator*();
```

1 *Returns:* \*this.

**6.7.2.6.4 insert\_iterator::operator++** [insert.iter.op++]

```
insert_iterator& operator++();
insert_iterator operator++(int);
```

1 *Returns:* \*this.

**6.7.2.6.5 inserter** [inserter]

```
template <class Container>
insert_iterator<Container> inserter(Container& x, iterator_t<Container> i);
```

1 *Returns:* insert\_iterator<Container>(x, i).

**6.7.3 Move iterators and sentinels** [iterators.move]

**6.7.3.1 Class template move\_iterator** [move.iterator]

1 Class template `move_iterator` is an iterator adaptor with the same behavior as the underlying iterator except that its indirection operator implicitly converts the value returned by the underlying iterator's indirection operator to an rvalue of the value type. Some generic algorithms can be called with move iterators to replace copying with moving.

2 [*Example:*

```
list<string> s;
// populate the list s
vector<string> v1(s.begin(), s.end()); // copies strings into v1
vector<string> v2(make_move_iterator(s.begin()),
                 make_move_iterator(s.end())); // moves strings into v2
```

— end example]

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
template <InputIterator I>
class move_iterator {
public:
using iterator_type = I;
using difference_type = difference_type_t<I>;
```

```

using value_type          = value_type_t<I>;
using iterator_category  = input_iterator_tag;
using reference           = see below;

move_iterator();
explicit move_iterator(I i);
move_iterator(const move_iterator<ConvertibleTo<I>>& i);
move_iterator& operator=(const move_iterator<ConvertibleTo<I>>& i);

I base() const;
reference operator*() const;

move_iterator& operator++();
move_iterator operator++(int);
move_iterator& operator--()
    requires BidirectionalIterator<I>();
move_iterator operator--(int)
    requires BidirectionalIterator<I>();

move_iterator operator+(difference_type n) const
    requires RandomAccessIterator<I>();
move_iterator& operator+=(difference_type n)
    requires RandomAccessIterator<I>();
move_iterator operator-(difference_type n) const
    requires RandomAccessIterator<I>();
move_iterator& operator-=(difference_type n)
    requires RandomAccessIterator<I>();
reference operator[](difference_type n) const
    requires RandomAccessIterator<I>();

private:
    I current; // exposition only
};

template <class I1, class I2>
    requires EqualityComparable<I1, I2>()
    bool operator==(
        const move_iterator<I1>& x, const move_iterator<I2>& y);
template <class I1, class I2>
    requires EqualityComparable<I1, I2>()
    bool operator!=(
        const move_iterator<I1>& x, const move_iterator<I2>& y);
template <class I1, class I2>
    requires StrictTotallyOrdered<I1, I2>()
    bool operator<(
        const move_iterator<I1>& x, const move_iterator<I2>& y);
template <class I1, class I2>
    requires StrictTotallyOrdered<I1, I2>()
    bool operator<=(
        const move_iterator<I1>& x, const move_iterator<I2>& y);
template <class I1, class I2>
    requires StrictTotallyOrdered<I1, I2>()
    bool operator>(
        const move_iterator<I1>& x, const move_iterator<I2>& y);
template <class I1, class I2>

```

```

    requires StrictTotallyOrdered<I1, I2>()
    bool operator>=(
        const move_iterator<I1>& x, const move_iterator<I2>& y);

template <class I1, class I2>
    requires SizedSentinel<I1, I2>()
    difference_type_t<I2> operator-(
        const move_iterator<I1>& x,
        const move_iterator<I2>& y);
template <RandomAccessIterator I>
    move_iterator<I>
    operator+(
        difference_type_t<I> n,
        const move_iterator<I>& x);
template <InputIterator I>
    move_iterator<I> make_move_iterator(I i);
}}}}

```

<sup>3</sup> Let  $R$  be `reference_t<I>`. If `is_reference<R>::value` is true, the template specialization `move_iterator<I>` shall define the nested type named `reference` as a synonym for `remove_reference_t<R>&&`, otherwise as a synonym for  $R$ .

<sup>4</sup> [*Note: `move_iterator` does not provide an `operator->` because the class member access expression  $i \rightarrow m$  may have different semantics than the expression  $(*i).m$  when the expression  $*i$  is an rvalue. — end note*]

### 6.7.3.2 `move_iterator` operations [move.iter.ops]

#### 6.7.3.2.1 `move_iterator` constructors [move.iter.op.const]

```
move_iterator();
```

<sup>1</sup> *Effects:* Constructs a `move_iterator`, value-initializing `current`. Iterator operations applied to the resulting iterator have defined behavior if and only if the corresponding operations are defined on a value-initialized iterator of type  $I$ .

```
explicit move_iterator(I i);
```

<sup>2</sup> *Effects:* Constructs a `move_iterator`, initializing `current` with  $i$ .

```
move_iterator(const move_iterator<ConvertibleTo<I>>& i);
```

<sup>3</sup> *Effects:* Constructs a `move_iterator`, initializing `current` with `i.current`.

#### 6.7.3.2.2 `move_iterator::operator=` [move.iter.op=]

```
move_iterator& operator=(const move_iterator<ConvertibleTo<I>>& i);
```

<sup>1</sup> *Effects:* Assigns `i.current` to `current`.

#### 6.7.3.2.3 `move_iterator` conversion [move.iter.op.conv]

```
I base() const;
```

<sup>1</sup> *Returns:* `current`.

#### 6.7.3.2.4 `move_iterator::operator*` [move.iter.op.star]

```
reference operator*() const;
```

<sup>1</sup> *Effects:* Equivalent to: `return static_cast<reference>(*current);`

**6.7.3.2.5** `move_iterator::operator++`

[move.iter.op.incr]

```
move_iterator& operator++();
```

1 *Effects:* Equivalent to ++current.

2 *Returns:* \*this.

```
move_iterator operator++(int);
```

3 *Effects:* Equivalent to:

```
    move_iterator tmp = *this;
    ++current;
    return tmp;
```

**6.7.3.2.6** `move_iterator::operator--`

[move.iter.op.decr]

```
move_iterator& operator--()
    requires BidirectionalIterator<I>();
```

1 *Effects:* Equivalent to --current.

2 *Returns:* \*this.

```
move_iterator operator--(int)
    requires BidirectionalIterator<I>();
```

3 *Effects:* Equivalent to:

```
    move_iterator tmp = *this;
    --current;
    return tmp;
```

**6.7.3.2.7** `move_iterator::operator+`

[move.iter.op.+]

```
move_iterator operator+(difference_type n) const
    requires RandomAccessIterator<I>();
```

1 *Effects:* Equivalent to: return move\_iterator(current + n);

**6.7.3.2.8** `move_iterator::operator+=`

[move.iter.op.+=]

```
move_iterator& operator+=(difference_type n)
    requires RandomAccessIterator<I>();
```

1 *Effects:* Equivalent to current += n.

2 *Returns:* \*this.

**6.7.3.2.9** `move_iterator::operator-`

[move.iter.op.-]

```
move_iterator operator-(difference_type n) const
    requires RandomAccessIterator<I>();
```

1 *Effects:* Equivalent to: return move\_iterator(current - n);

**6.7.3.2.10** `move_iterator::operator-=`

[move.iter.op.-=]

```
move_iterator& operator-=(difference_type n)
    requires RandomAccessIterator<I>();
```

1 *Effects:* Equivalent to current -= n.

2 *Returns:* \*this.

**6.7.3.2.11** `move_iterator::operator[]`

[move.iter.op.index]

```
reference operator[](difference_type n) const
requires RandomAccessIterator<I>();
```

1 *Effects:* Equivalent to: `return static_cast<reference>(current[n]);`

**6.7.3.2.12** `move_iterator` comparisons

[move.iter.op.comp]

```
template <class I1, class I2>
requires EqualityComparable<I1, I2>()
bool operator==(
const move_iterator<I1>& x, const move_iterator<I2>& y);
```

1 *Effects:* Equivalent to: `return x.current == y.current;`

```
template <class I1, class I2>
requires EqualityComparable<I1, I2>()
bool operator!=(
const move_iterator<I1>& x, const move_iterator<I2>& y);
```

2 *Effects:* Equivalent to: `return !(x == y);`

```
template <class I1, class I2>
requires StrictTotallyOrdered<I1, I2>()
bool operator<(
const move_iterator<I1>& x, const move_iterator<I2>& y);
```

3 *Effects:* Equivalent to: `return x.current < y.current;`

```
template <class I1, class I2>
requires StrictTotallyOrdered<I1, I2>()
bool operator<=(
const move_iterator<I1>& x, const move_iterator<I2>& y);
```

4 *Effects:* Equivalent to: `return !(y < x);`

```
template <class I1, class I2>
requires StrictTotallyOrdered<I1, I2>()
bool operator>(
const move_iterator<I1>& x, const move_iterator<I2>& y);
```

5 *Effects:* Equivalent to: `return y < x;`

```
template <class I1, class I2>
requires StrictTotallyOrdered<I1, I2>()
bool operator>=(
const move_iterator<I1>& x, const move_iterator<I2>& y);
```

6 *Effects:* Equivalent to: `return !(x < y);`.

**6.7.3.2.13** `move_iterator` non-member functions

[move.iter.nonmember]

```
template <class I1, class I2>
requires SizedSentinel<I1, I2>()
difference_type_t<I2> operator-(
const move_iterator<I1>& x,
const move_iterator<I2>& y);
```

1 *Effects:* Equivalent to: `return x.current - y.current;`

```
template <RandomAccessIterator I>
  move_iterator<I>
  operator+(
    difference_type_t<I> n,
    const move_iterator<I>& x);
```

<sup>2</sup> *Effects:* Equivalent to: return  $x + n$ ;

```
template <InputIterator I>
  move_iterator<I> make_move_iterator(I i);
```

<sup>3</sup> *Returns:* `move_iterator<I>(i)`.

### 6.7.3.3 Class template `move_sentinel`

[`move.sentinel`]

<sup>1</sup> Class template `move_sentinel` is a sentinel adaptor useful for denoting ranges together with `move_iterator`. When an input iterator type `I` and sentinel type `S` satisfy `Sentinel<S, I>()`, `Sentinel<move_sentinel<S>, move_iterator<I>>()` is satisfied as well.

<sup>2</sup> [*Example:* A `move_if` algorithm is easily implemented with `copy_if` using `move_iterator` and `move_sentinel`:

```
template <InputIterator I, Sentinel<I> S, WeaklyIncrementable O,
  IndirectPredicate<I> Pred>
  requires IndirectlyMovable<I, O>()
void move_if(I first, S last, O out, Pred pred)
{
  copy_if(move_iterator<I>{first}, move_sentinel<S>{last}, out, pred);
}
```

— *end example*]

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
  template <Semiregular S>
  class move_sentinel {
  public:
    constexpr move_sentinel();
    explicit move_sentinel(S s);
    move_sentinel(const move_sentinel<ConvertibleTo<S>>& s);
    move_sentinel& operator=(const move_sentinel<ConvertibleTo<S>>& s);

    S base() const;

  private:
    S last; // exposition only
  };

  template <class I, Sentinel<I> S>
  bool operator==(
    const move_iterator<I>& i, const move_sentinel<S>& s);
  template <class I, Sentinel<I> S>
  bool operator==(
    const move_sentinel<S>& s, const move_iterator<I>& i);
  template <class I, Sentinel<I> S>
  bool operator!=(
    const move_iterator<I>& i, const move_sentinel<S>& s);
  template <class I, Sentinel<I> S>
  bool operator!=(
    const move_sentinel<S>& s, const move_iterator<I>& i);
```

```

    const move_sentinel<S>& s, const move_iterator<I>& i);

template <class I, SizedSentinel<I> S>
    difference_type_t<I> operator-(
        const move_sentinel<S>& s, const move_iterator<I>& i);
template <class I, SizedSentinel<I> S>
    difference_type_t<I> operator-(
        const move_iterator<I>& i, const move_sentinel<S>& s);

template <Semiregular S>
    move_sentinel<S> make_move_sentinel(S s);
}}}}

```

#### 6.7.3.4 move\_sentinel operations

[move.sent.ops]

##### 6.7.3.4.1 move\_sentinel constructors

[move.sent.op.const]

```
constexpr move_sentinel();
```

- 1 *Effects:* Constructs a move\_sentinel, value-initializing last. If is\_trivially\_default\_constructible<S>::value is true, then this constructor is a constexpr constructor.

```
explicit move_sentinel(S s);
```

- 2 *Effects:* Constructs a move\_sentinel, initializing last with s.

```
move_sentinel(const move_sentinel<ConvertibleTo<S>>& s);
```

- 3 *Effects:* Constructs a move\_sentinel, initializing last with s.last.

##### 6.7.3.4.2 move\_sentinel::operator=

[move.sent.op.=]

```
move_sentinel& operator=(const move_sentinel<ConvertibleTo<S>>& s);
```

- 1 *Effects:* Assigns s.last to last.

- 2 *Returns:* \*this.

##### 6.7.3.4.3 move\_sentinel comparisons

[move.sent.op.comp]

```

template <class I, Sentinel<I> S>
    bool operator==(
        const move_iterator<I>& i, const move_sentinel<S>& s);
template <class I, Sentinel<I> S>
    bool operator==(
        const move_sentinel<S>& s, const move_iterator<I>& i);

```

- 1 *Effects:* Equivalent to: return i.current == s.last;

```

template <class I, Sentinel<I> S>
    bool operator!=(
        const move_iterator<I>& i, const move_sentinel<S>& s);
template <class I, Sentinel<I> S>
    bool operator!=(
        const move_sentinel<S>& s, const move_iterator<I>& i);

```

- 2 *Effects:* Equivalent to: return !(i == s);



6.7.3.4.4 `move_sentinel` non-member functions[`move.sent.nonmember`]

```

template <class I, SizedSentinel<I> S>
  difference_type_t<I> operator-(
    const move_sentinel<S>& s, const move_iterator<I>& i);
1   Effects: Equivalent to: return s.last - i.current;

template <class I, SizedSentinel<I> S>
  difference_type_t<I> operator-(
    const move_iterator<I>& i, const move_sentinel<S>& s);
2   Effects: Equivalent to: return i.current - s.last;

template <Semiregular S>
  move_sentinel<S> make_move_sentinel(S s);
3   Returns: move_sentinel<S>(s).

```

## 6.7.4 Common iterators

[`iterators.common`]

- 1 Class template `common_iterator` is an iterator/sentinel adaptor that is capable of representing a non-bounded range of elements (where the types of the iterator and sentinel differ) as a bounded range (where they are the same). It does this by holding either an iterator or a sentinel, and implementing the equality comparison operators appropriately.
- 2 [*Note:* The `common_iterator` type is useful for interfacing with legacy code that expects the begin and end of a range to have the same type. — *end note*]
- 3 [*Example:*

```

template <class ForwardIterator>
void fun(ForwardIterator begin, ForwardIterator end);

list<int> s;
// populate the list s
using CI =
  common_iterator<counted_iterator<list<int>::iterator>,
                 default_sentinel>;
// call fun on a range of 10 ints
fun(CI(make_counted_iterator(s.begin(), 10)),
    CI(default_sentinel()));

```

— *end example*]6.7.4.1 Class template `common_iterator`[`common.iterator`]

```

namespace std { namespace experimental { namespace ranges { inline namespace v1 {
  template <Iterator I, Sentinel<I> S>
    requires !Same<I, S>()
    class common_iterator {
  public:
    using difference_type = difference_type_t<I>;

    common_iterator();
    common_iterator(I i);
    common_iterator(S s);
    common_iterator(const common_iterator<ConvertibleTo<I>, ConvertibleTo<S>>& u);
    common_iterator& operator=(const common_iterator<ConvertibleTo<I>, ConvertibleTo<S>>& u);

```

```

    ~common_iterator();

    see below operator*();
    see below operator*() const;
    see below operator->() const requires Readable<I>();

    common_iterator& operator++();
    common_iterator operator++(int);

private:
    bool is_sentinel; // exposition only
    I iter;           // exposition only
    S sentinel;      // exposition only
};

template <Readable I, class S>
struct value_type<common_iterator<I, S>> {
    using type = value_type_t<I>;
};

template <InputIterator I, class S>
struct iterator_category<common_iterator<I, S>> {
    using type = input_iterator_tag;
};

template <ForwardIterator I, class S>
struct iterator_category<common_iterator<I, S>> {
    using type = forward_iterator_tag;
};

template <class I1, class I2, Sentinel<I2> S1, Sentinel<I1> S2>
bool operator==(
    const common_iterator<I1, S1>& x, const common_iterator<I2, S2>& y);
template <class I1, class I2, Sentinel<I2> S1, Sentinel<I1> S2>
    requires EqualityComparable<I1, I2>()
bool operator==(
    const common_iterator<I1, S1>& x, const common_iterator<I2, S2>& y);
template <class I1, class I2, Sentinel<I2> S1, Sentinel<I1> S2>
bool operator!=(
    const common_iterator<I1, S1>& x, const common_iterator<I2, S2>& y);

template <class I2, SizedSentinel<I2> I1, SizedSentinel<I2> S1, SizedSentinel<I1> S2>
difference_type_t<I2> operator-(
    const common_iterator<I1, S1>& x, const common_iterator<I2, S2>& y);
}}}}

```

<sup>1</sup> [Note: It is unspecified whether `common_iterator`'s members `iter` and `sentinel` have distinct addresses or not. — end note]

#### 6.7.4.2 `common_iterator` operations

[common.iter.ops]

##### 6.7.4.2.1 `common_iterator` constructors

[common.iter.op.const]

```
common_iterator();
```

<sup>1</sup> *Effects:* Constructs a `common_iterator`, value-initializing `is_sentinel` and `iter`. Iterator operations applied to the resulting iterator have defined behavior if and only if the corresponding operations are

defined on a value-initialized iterator of type I.

2 *Remarks:* It is unspecified whether any initialization is performed for `sentinel`.

`common_iterator(I i);`

3 *Effects:* Constructs a `common_iterator`, initializing `is_sentinel` with `false` and `iter` with `i`.

4 *Remarks:* It is unspecified whether any initialization is performed for `sentinel`.

`common_iterator(S s);`

5 *Effects:* Constructs a `common_iterator`, initializing `is_sentinel` with `true` and `sentinel` with `s`.

6 *Remarks:* It is unspecified whether any initialization is performed for `iter`.

`common_iterator(const common_iterator<ConvertibleTo<I>, ConvertibleTo<S>>& u);`

7 *Effects:* Constructs a `common_iterator`, initializing `is_sentinel` with `u.is_sentinel`.

(7.1) — If `u.is_sentinel` is `true`, `sentinel` is initialized with `u.sentinel`.

(7.2) — If `u.is_sentinel` is `false`, `iter` is initialized with `u.iter`.

8 *Remarks:*

(8.1) — If `u.is_sentinel` is `true`, it is unspecified whether any initialization is performed for `iter`.

(8.2) — If `u.is_sentinel` is `false`, it is unspecified whether any initialization is performed for `sentinel`.

**6.7.4.2.2** `common_iterator::operator=` [`common.iter.op=`]

`common_iterator& operator=(const common_iterator<ConvertibleTo<I>, ConvertibleTo<S>>& u);`

1 *Effects:* Assigns `u.is_sentinel` to `is_sentinel`.

(1.1) — If `u.is_sentinel` is `true`, assigns `u.sentinel` to `sentinel`.

(1.2) — If `u.is_sentinel` is `false`, assigns `u.iter` to `iter`.

*Remarks:*

(1.3) — If `u.is_sentinel` is `true`, it is unspecified whether any operation is performed on `iter`.

(1.4) — If `u.is_sentinel` is `false`, it is unspecified whether any operation is performed on `sentinel`.

2 *Returns:* `*this`

`~common_iterator();`

3 *Effects:* Destroys all members that are currently initialized.

**6.7.4.2.3** `common_iterator::operator*` [`common.iter.op.star`]

`decltype(auto) operator*();`  
`decltype(auto) operator*() const;`

1 *Requires:* `!is_sentinel`

2 *Effects:* Equivalent to: `return *iter;`

*see below* `operator->() const` requires `Readable<I>()`;

3 *Requires:* `!is_sentinel`

4 *Effects:* Given an object `i` of type `I`

- (4.1) — if `I` is a pointer type or if the expression `i.operator->()` is well-formed, this function returns `iter`.
- (4.2) — Otherwise, if the expression `*iter` is a glvalue, this function is equivalent to `return addressof(*iter);`
- (4.3) — Otherwise, this function returns a proxy object of an unspecified type equivalent to the following:

```
class proxy { // exposition only
    value_type_t<I> keep_;
    proxy(reference_t<I>&& x)
        : keep_(std::move(x)) {}
public:
    const value_type_t<I>* operator->() const {
        return addressof(keep_);
    }
};
```

that is initialized with `*iter`.

#### 6.7.4.2.4 `common_iterator::operator++`

[common.iter.op.incr]

```
common_iterator& operator++();
```

1 *Requires:* `!is_sentinel`

2 *Effects:* `++iter`.

3 *Returns:* `*this`.

```
common_iterator operator++(int);
```

4 *Requires:* `!is_sentinel`

5 *Effects:* Equivalent to:

```
common_iterator tmp = *this;
++iter;
return tmp;
```

#### 6.7.4.2.5 `common_iterator` comparisons

[common.iter.op.comp]

```
template <class I1, class I2, Sentinel<I2> S1, Sentinel<I1> S2>
bool operator==(
    const common_iterator<I1, S1>& x, const common_iterator<I2, S2>& y);
```

1 *Effects:* Equivalent to:

```
return x.is_sentinel ?
    (y.is_sentinel || y.iter == x.sentinel) :
    (!y.is_sentinel || x.iter == y.sentinel);
```

```
template <class I1, class I2, Sentinel<I2> S1, Sentinel<I1> S2>
requires EqualityComparable<I1, I2>()
bool operator==(
    const common_iterator<I1, S1>& x, const common_iterator<I2, S2>& y);
```

2 *Effects:* Equivalent to:

```

return x.is_sentinel ?
    (y.is_sentinel || y.iter == x.sentinel) :
    (y.is_sentinel ?
        x.iter == y.sentinel :
        x.iter == y.iter);

```

```

template <class I1, class I2, Sentinel<I2> S1, Sentinel<I1> S2>
bool operator!=(
    const common_iterator<I1, S1>& x, const common_iterator<I2, S2>& y);

```

3 *Effects:* Equivalent to: `return !(x == y);`

```

template <class I2, SizedSentinel<I2> I1, SizedSentinel<I2> S1, SizedSentinel<I1> S2>
difference_type_t<I2> operator-(
    const common_iterator<I1, S1>& x, const common_iterator<I2, S2>& y);

```

4 *Effects:* Equivalent to:

```

return x.is_sentinel ?
    (y.is_sentinel ? 0 : x.sentinel - y.iter) :
    (y.is_sentinel ?
        x.iter - y.sentinel :
        x.iter - y.iter);

```

## 6.7.5 Default sentinels

[default.sentinels]

### 6.7.5.1 Class `default_sentinel`

[default.sent]

```

namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    class default_sentinel { };
}}}}

```

1 Class `default_sentinel` is an empty type used to denote the end of a range. It is intended to be used together with iterator types that know the bound of their range (e.g., `counted_iterator` (6.7.6.1)).

## 6.7.6 Counted iterators

[iterators.counted]

### 6.7.6.1 Class template `counted_iterator`

[counted.iterator]

1 Class template `counted_iterator` is an iterator adaptor with the same behavior as the underlying iterator except that it keeps track of its distance from its starting position. It can be used together with class `default_sentinel` in calls to generic algorithms to operate on a range of  $N$  elements starting at a given position without needing to know the end position *a priori*.

2 [*Example:*

```

list<string> s;
// populate the list s with at least 10 strings
vector<string> v(make_counted_iterator(s.begin(), 10),
                default_sentinel()); // copies 10 strings into v

```

— *end example*]

3 Two values `i1` and `i2` of (possibly differing) types `counted_iterator<I1>` and `counted_iterator<I2>` refer to elements of the same sequence if and only if `next(i1.base(), i1.count())` and `next(i2.base(), i2.count())` refer to the same (possibly past-the-end) element.

```

namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    template <Iterator I>
    class counted_iterator {

```

```

public:
    using iterator_type = I;
    using difference_type = difference_type_t<I>;

    counted_iterator();
    counted_iterator(I x, difference_type_t<I> n);
    counted_iterator(const counted_iterator<ConvertibleTo<I>>& i);
    counted_iterator& operator=(const counted_iterator<ConvertibleTo<I>>& i);

    I base() const;
    difference_type_t<I> count() const;
    see below operator*();
    see below operator*() const;

    counted_iterator& operator++();
    counted_iterator operator++(int);
    counted_iterator& operator--()
        requires BidirectionalIterator<I>();
    counted_iterator operator--(int)
        requires BidirectionalIterator<I>();

    counted_iterator operator+ (difference_type n) const
        requires RandomAccessIterator<I>();
    counted_iterator& operator+=(difference_type n)
        requires RandomAccessIterator<I>();
    counted_iterator operator- (difference_type n) const
        requires RandomAccessIterator<I>();
    counted_iterator& operator-=(difference_type n)
        requires RandomAccessIterator<I>();
    see below operator[](difference_type n) const
        requires RandomAccessIterator<I>();
private:
    I current; // exposition only
    difference_type_t<I> cnt; // exposition only
};

template <Readable I>
struct value_type<counted_iterator<I>> {
    using type = value_type_t<I>;
};

template <InputIterator I>
struct iterator_category<counted_iterator<I>> {
    using type = iterator_category_t<I>;
};

template <class I1, class I2>
    requires Common<I1, I2>()
    bool operator==(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);
    bool operator==(
        const counted_iterator<auto>& x, default_sentinel);
    bool operator==(
        default_sentinel, const counted_iterator<auto>& x);

```

```

template <class I1, class I2>
    requires Common<I1, I2>()
    bool operator!=(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);
    bool operator!=(
        const counted_iterator<auto>& x, default_sentinel y);
    bool operator!=(
        default_sentinel x, const counted_iterator<auto>& y);

template <class I1, class I2>
    requires Common<I1, I2>()
    bool operator<(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);
template <class I1, class I2>
    requires Common<I1, I2>()
    bool operator<=(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);
template <class I1, class I2>
    requires Common<I1, I2>()
    bool operator>(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);
template <class I1, class I2>
    requires Common<I1, I2>()
    bool operator>=(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);
template <class I1, class I2>
    requires Common<I1, I2>()
    difference_type_t<I2> operator-(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);
template <class I>
    difference_type_t<I> operator-(
        const counted_iterator<I>& x, default_sentinel y);
template <class I>
    difference_type_t<I> operator-(
        default_sentinel x, const counted_iterator<I>& y);

template <RandomAccessIterator I>
    counted_iterator<I>
        operator+(difference_type_t<I> n, const counted_iterator<I>& x);

template <Iterator I>
    counted_iterator<I> make_counted_iterator(I i, difference_type_t<I> n);

template <Iterator I>
    void advance(counted_iterator<I>& i, difference_type_t<I> n);
}}}}

```

## 6.7.6.2 counted\_iterator operations

[counted.iter.ops]

### 6.7.6.2.1 counted\_iterator constructors

[counted.iter.op.const]

```
counted_iterator();
```

- <sup>1</sup> *Effects:* Constructs a `counted_iterator`, value-initializing `current` and `cnt`. Iterator operations applied to the resulting iterator have defined behavior if and only if the corresponding operations are defined on a value-initialized iterator of type `I`.

```
counted_iterator(I i, difference_type_t<I> n);
```

2     *Requires:*  $n \geq 0$

3     *Effects:* Constructs a `counted_iterator`, initializing `current` with `i` and `cnt` with `n`.

```
counted_iterator(const counted_iterator<ConvertibleTo<I>>& i);
```

4     *Effects:* Constructs a `counted_iterator`, initializing `current` with `i.current` and `cnt` with `i.cnt`.

**6.7.6.2.2** `counted_iterator::operator=` [counted.iter.op=]

```
counted_iterator& operator=(const counted_iterator<ConvertibleTo<I>>& i);
```

1     *Effects:* Assigns `i.current` to `current` and `i.cnt` to `cnt`.

**6.7.6.2.3** `counted_iterator` conversion [counted.iter.op.conv]

```
I base() const;
```

1     *Returns:* `current`.

**6.7.6.2.4** `counted_iterator` count [counted.iter.op.cnt]

```
difference_type_t<I> count() const;
```

1     *Returns:* `cnt`.

**6.7.6.2.5** `counted_iterator::operator*` [counted.iter.op.star]

```
decltype(auto) operator*();
decltype(auto) operator*() const;
```

1     *Effects:* Equivalent to: `return *current;`

**6.7.6.2.6** `counted_iterator::operator++` [counted.iter.op.incr]

```
counted_iterator& operator++();
```

1     *Requires:*  $cnt > 0$

2     *Effects:* Equivalent to:

```
++current;
--cnt;
```

3     *Returns:* `*this`.

```
counted_iterator operator++(int);
```

4     *Requires:*  $cnt > 0$

5     *Effects:* Equivalent to:

```
counted_iterator tmp = *this;
++current;
--cnt;
return tmp;
```



**6.7.6.2.7** `counted_iterator::operator--` [counted.iter.op.decr]

```
counted_iterator& operator--();
requires BidirectionalIterator<I>()
```

1 *Effects:* Equivalent to:

```
--current;
++cnt;
```

2 *Returns:* `*this`.

```
counted_iterator operator--(int)
requires BidirectionalIterator<I>()
```

3 *Effects:* Equivalent to:

```
counted_iterator tmp = *this;
--current;
++cnt;
return tmp;
```

**6.7.6.2.8** `counted_iterator::operator+` [counted.iter.op.+]

```
counted_iterator operator+(difference_type n) const
requires RandomAccessIterator<I>()
```

1 *Requires:* `n <= cnt`

2 *Effects:* Equivalent to: `return counted_iterator(current + n, cnt - n);`

**6.7.6.2.9** `counted_iterator::operator+=` [counted.iter.op.+=]

```
counted_iterator& operator+=(difference_type n)
requires RandomAccessIterator<I>()
```

1 *Requires:* `n <= cnt`

2 *Effects:*

```
current += n;
cnt -= n;
```

3 *Returns:* `*this`.

**6.7.6.2.10** `counted_iterator::operator-` [counted.iter.op.-]

```
counted_iterator operator-(difference_type n) const
requires RandomAccessIterator<I>()
```

1 *Requires:* `-n <= cnt`

2 *Effects:* Equivalent to: `return counted_iterator(current - n, cnt + n);`

**6.7.6.2.11** `counted_iterator::operator-=` [counted.iter.op.-=]

```
counted_iterator& operator-=(difference_type n)
requires RandomAccessIterator<I>()
```

1 *Requires:* `-n <= cnt`

2 *Effects:*

```

    current -= n;
    cnt += n;

```

3 *Returns: \*this.*

#### 6.7.6.2.12 counted\_iterator::operator[]

[counted.iter.op.index]

```

decltype(auto) operator[](difference_type n) const
    requires RandomAccessIterator<I>();

```

1 *Requires: n <= cnt*

2 *Effects: Equivalent to: return current[n];*

#### 6.7.6.2.13 counted\_iterator comparisons

[counted.iter.op.comp]

```

template <class I1, class I2>
    requires Common<I1, I2>()
    bool operator==(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);

```

1 *Requires: x and y shall refer to elements of the same sequence (6.7.6).*

2 *Effects: Equivalent to: return x.cnt == y.cnt;*

```

bool operator==(
    const counted_iterator<auto>& x, default_sentinel);
bool operator==(
    default_sentinel, const counted_iterator<auto>& x);

```

3 *Effects: Equivalent to: return x.cnt == 0;*

```

template <class I1, class I2>
    requires Common<I1, I2>()
    bool operator!=(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);
bool operator!=(
    const counted_iterator<auto>& x, default_sentinel);
bool operator!=(
    default_sentinel, const counted_iterator<auto>& x);

```

4 *Requires: For the first overload, x and y shall refer to elements of the same sequence (6.7.6).*

5 *Effects: Equivalent to: return !(x == y);*

```

template <class I1, class I2>
    requires Common<I1, I2>()
    bool operator<(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);

```

6 *Requires: x and y shall refer to elements of the same sequence (6.7.6).*

7 *Effects: Equivalent to: return y.cnt < x.cnt;*

8 [ *Note: The argument order in the *Effects* element is reversed because cnt counts down, not up. — end note* ]

```

template <class I1, class I2>
    requires Common<I1, I2>()
    bool operator<=(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);

```

9 *Requires:* x and y shall refer to elements of the same sequence (6.7.6).

10 *Effects:* Equivalent to: return !(y < x);

```
template <class I1, class I2>
    requires Common<I1, I2>()
    bool operator>(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);
```

11 *Requires:* x and y shall refer to elements of the same sequence (6.7.6).

12 *Effects:* Equivalent to: return y < x;

```
template <class I1, class I2>
    requires Common<I1, I2>()
    bool operator>=(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);
```

13 *Requires:* x and y shall refer to elements of the same sequence (6.7.6).

14 *Effects:* Equivalent to: return !(x < y);

#### 6.7.6.2.14 counted\_iterator non-member functions

[counted.iter.nonmember]

```
template <class I1, class I2>
    requires Common<I1, I2>()
    difference_type_t<I2> operator-(
        const counted_iterator<I1>& x, const counted_iterator<I2>& y);
```

1 *Requires:* x and y shall refer to elements of the same sequence (6.7.6).

2 *Effects:* Equivalent to: return y.cnt - x.cnt;

```
template <class I>
    difference_type_t<I> operator-(
        const counted_iterator<I>& x, default_sentinel y);
```

3 *Effects:* Equivalent to: return -x.cnt;

```
template <class I>
    difference_type_t<I> operator-(
        default_sentinel x, const counted_iterator<I>& y);
```

4 *Effects:* Equivalent to: return y.cnt;

```
template <RandomAccessIterator I>
    counted_iterator<I>
        operator+(difference_type_t<I> n, const counted_iterator<I>& x);
```

5 *Requires:* n <= x.cnt.

6 *Effects:* Equivalent to: return x + n;

```
template <Iterator I>
    counted_iterator<I> make_counted_iterator(I i, difference_type_t<I> n);
```

7 *Requires:* n >= 0.

8 *Returns:* counted\_iterator<I>(i, n).

```
template <Iterator I>
    void advance(counted_iterator<I>& i, difference_type_t<I> n);
```

9 *Requires:* `n <= i.cnt`.

10 *Effects:*

```
i = make_counted_iterator(next(i.current), n), i.cnt - n);
```

## 6.7.7 Dangling wrapper

[dangling.wrappers]

### 6.7.7.1 Class template `dangling`

[dangling.wrap]

1 Class template `dangling` is a wrapper for an object that refers to another object whose lifetime may have ended. It is used by algorithms that accept rvalue ranges and return iterators.

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    template <CopyConstructible T>
    class dangling {
    public:
        dangling() requires DefaultConstructible<T>();
        dangling(T t);
        T get_unsafe() const;
    private:
        T value; // exposition only
    };

    template <Range R>
    using safe_iterator_t =
        conditional_t<is_lvalue_reference<R>::value,
            iterator_t<R>,
            dangling<iterator_t<R>>>;
    }}}}

```

### 6.7.7.2 `dangling` operations

[dangling.wrap.ops]

#### 6.7.7.2.1 `dangling` constructors

[dangling.wrap.op.const]

`dangling()` requires `DefaultConstructible<T>()`;

1 *Effects:* Constructs a `dangling`, value-initializing value.

```
dangling(T t);
```

2 *Effects:* Constructs a `dangling`, initializing value with `t`.

#### 6.7.7.2.2 `dangling::get_unsafe`

[dangling.wrap.op.get]

```
T get_unsafe() const;
```

1 *Returns:* value.

## 6.7.8 Unreachable sentinel

[unreachable.sentinel]

### 6.7.8.1 Class `unreachable`

[unreachable.sentinel]

1 Class `unreachable` is a sentinel type that can be used with any `Iterator` to denote an infinite range. Comparing an iterator for equality with an object of type `unreachable` always returns `false`.

[*Example:*

```
char* p;
// set p to point to a character buffer containing newlines
char* nl = find(p, unreachable(), '\n');
```

Provided a newline character really exists in the buffer, the use of `unreachable` above potentially makes the call to `find` more efficient since the loop test against the sentinel does not require a conditional branch. — *end example*]

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    class unreachable { };

    template <Iterator I>
        constexpr bool operator==(const I&, unreachable) noexcept;
    template <Iterator I>
        constexpr bool operator==(unreachable, const I&) noexcept;
    template <Iterator I>
        constexpr bool operator!=(const I&, unreachable) noexcept;
    template <Iterator I>
        constexpr bool operator!=(unreachable, const I&) noexcept;
}}}}
```

### 6.7.8.2 unreachable operations

[`unreachable.sentinel.ops`]

#### 6.7.8.2.1 operator==

[`unreachable.sentinel.op==`]

```
template <Iterator I>
    constexpr bool operator==(const I&, unreachable) noexcept;
template <Iterator I>
    constexpr bool operator==(unreachable, const I&) noexcept;
```

<sup>1</sup> *Returns:* false.

#### 6.7.8.2.2 operator!=

[`unreachable.sentinel.op!=`]

```
template <Iterator I>
    constexpr bool operator!=(const I& x, unreachable y) noexcept;
template <Iterator I>
    constexpr bool operator!=(unreachable x, const I& y) noexcept;
```

<sup>1</sup> *Returns:* true.

## 6.8 Stream iterators

[`iterators.stream`]

<sup>1</sup> To make it possible for algorithmic templates to work directly with input/output streams, appropriate iterator-like class templates are provided.

[*Example:*

```
partial_sum(istream_iterator<double, char>(cin),
            istream_iterator<double, char>(),
            ostream_iterator<double, char>(cout, "\n"));
```

reads a file containing floating point numbers from `cin`, and prints the partial sums onto `cout`. — *end example*]

### 6.8.1 Class template `istream_iterator`

[`istream.iterator`]

<sup>1</sup> The class template `istream_iterator` is an input iterator (6.2.9) that reads (using `operator>>`) successive elements from the input stream for which it was constructed. After it is constructed, and every time `++` is used, the iterator reads and stores a value of `T`. If the iterator fails to read and store a value of `T` (`fail()` on the stream returns `true`), the iterator becomes equal to the *end-of-stream* iterator value. The constructor with no arguments `istream_iterator()` always constructs an end-of-stream input iterator object, which is the only legitimate iterator to be used for the end condition. The result of `operator*` on an end-of-stream

iterator is not defined. For any other iterator value a `const T&` is returned. The result of `operator->` on an end-of-stream iterator is not defined. For any other iterator value a `const T*` is returned. The behavior of a program that applies `operator++()` to an end-of-stream iterator is undefined. It is impossible to store things into istream iterators.

- <sup>2</sup> Two end-of-stream iterators are always equal. An end-of-stream iterator is not equal to a non-end-of-stream iterator. Two non-end-of-stream iterators are equal when they are constructed from the same stream.

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    template <class T, class charT = char, class traits = char_traits<charT>,
        class Distance = ptrdiff_t>
    class istream_iterator {
    public:
        typedef input_iterator_tag iterator_category;
        typedef Distance difference_type;
        typedef T value_type;
        typedef const T& reference;
        typedef const T* pointer;
        typedef charT char_type;
        typedef traits traits_type;
        typedef basic_istream<charT, traits> istream_type;
        see below istream_iterator();
        see below istream_iterator(default_sentinel);
        istream_iterator(istream_type& s);
        istream_iterator(const istream_iterator& x) = default;
        ~istream_iterator() = default;

        const T& operator*() const;
        const T* operator->() const;
        istream_iterator& operator++();
        istream_iterator operator++(int);
    private:
        basic_istream<charT, traits>* in_stream; // exposition only
        T value; // exposition only
    };

    template <class T, class charT, class traits, class Distance>
        bool operator==(const istream_iterator<T, charT, traits, Distance>& x,
            const istream_iterator<T, charT, traits, Distance>& y);
    template <class T, class charT, class traits, class Distance>
        bool operator==(default_sentinel x,
            const istream_iterator<T, charT, traits, Distance>& y);
    template <class T, class charT, class traits, class Distance>
        bool operator==(const istream_iterator<T, charT, traits, Distance>& x,
            default_sentinel y);
    template <class T, class charT, class traits, class Distance>
        bool operator!=(const istream_iterator<T, charT, traits, Distance>& x,
            const istream_iterator<T, charT, traits, Distance>& y);
    template <class T, class charT, class traits, class Distance>
        bool operator!=(default_sentinel x,
            const istream_iterator<T, charT, traits, Distance>& y);
    template <class T, class charT, class traits, class Distance>
        bool operator!=(const istream_iterator<T, charT, traits, Distance>& x,
            default_sentinel y);
}}}}
```

6.8.1.1 `istream_iterator` constructors and destructor

[istream.iterator.cons]

see below `istream_iterator()`;  
 see below `istream_iterator(default_sentinel)`;

1 *Effects:* Constructs the end-of-stream iterator. If T is a literal type, then these constructors shall be `constexpr` constructors.

2 *Postcondition:* `in_stream == nullptr`.

`istream_iterator(istream_type& s);`

3 *Effects:* Initializes `in_stream` with `&s`. value may be initialized during construction or the first time it is referenced.

4 *Postcondition:* `in_stream == &s`.

`istream_iterator(const istream_iterator& x) = default;`

5 *Effects:* Constructs a copy of `x`. If T is a literal type, then this constructor shall be a trivial copy constructor.

6 *Postcondition:* `in_stream == x.in_stream`.

`~istream_iterator() = default;`

7 *Effects:* The iterator is destroyed. If T is a literal type, then this destructor shall be a trivial destructor.

6.8.1.2 `istream_iterator` operations

[istream.iterator.ops]

`const T& operator*() const;`

1 *Returns:* value.

`const T* operator->() const;`

2 *Effects:* Equivalent to: `return std::addressof(operator*());`.

`istream_iterator& operator++();`

3 *Requires:* `in_stream != nullptr`.

4 *Effects:* `*in_stream >> value`.

5 *Returns:* `*this`.

`istream_iterator operator++(int);`

6 *Requires:* `in_stream != nullptr`.

7 *Effects:*

```
    istream_iterator tmp = *this;
    *in_stream >> value;
    return tmp;
```

```
template <class T, class charT, class traits, class Distance>
    bool operator==(const istream_iterator<T, charT, traits, Distance> &x,
                   const istream_iterator<T, charT, traits, Distance> &y);
```

8 *Returns:* `x.in_stream == y.in_stream`.

```
template <class T, class charT, class traits, class Distance>
    bool operator==(default_sentinel x,
                    const istream_iterator<T, charT, traits, Distance> &y);
```

9 *Returns:* nullptr == y.in\_stream.

```
template <class T, class charT, class traits, class Distance>
    bool operator==(const istream_iterator<T, charT, traits, Distance> &x,
                    default_sentinel y);
```

10 *Returns:* x.in\_stream == nullptr.

```
template <class T, class charT, class traits, class Distance>
    bool operator!=(const istream_iterator<T, charT, traits, Distance>& x,
                    const istream_iterator<T, charT, traits, Distance>& y);
```

```
template <class T, class charT, class traits, class Distance>
    bool operator!=(default_sentinel x,
                    const istream_iterator<T, charT, traits, Distance>& y);
```

```
template <class T, class charT, class traits, class Distance>
    bool operator!=(const istream_iterator<T, charT, traits, Distance>& x,
                    default_sentinel y);
```

11 *Returns:* !(x == y)

## 6.8.2 Class template ostream\_iterator

[ostream.iterator]

1 ostream\_iterator writes (using operator<<) successive elements onto the output stream from which it was constructed. If it was constructed with charT\* as a constructor argument, this string, called a *delimiter string*, is written to the stream after every T is written. It is not possible to get a value out of the output iterator. Its only use is as an output iterator in situations like

```
while (first != last)
    *result++ = *first++;
```

2 ostream\_iterator is defined as:

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    template <class T, class charT = char, class traits = char_traits<charT>>
        class ostream_iterator {
        public:
            typedef ptrdiff_t difference_type;
            typedef charT char_type;
            typedef traits traits_type;
            typedef basic_ostream<charT, traits> ostream_type;
            constexpr ostream_iterator() noexcept;
            ostream_iterator(ostream_type& s) noexcept;
            ostream_iterator(ostream_type& s, const charT* delimiter) noexcept;
            ostream_iterator(const ostream_iterator& x) noexcept;
            ~ostream_iterator();
            ostream_iterator& operator=(const T& value);

            ostream_iterator& operator*();
            ostream_iterator& operator++();
            ostream_iterator operator++(int);
        private:
            basic_ostream<charT, traits>* out_stream; // exposition only
            const charT* delim; // exposition only
        };
    }}}}
```



**6.8.2.1 ostream\_iterator constructors and destructor**

[ostream.iterator.cons.des]

```
constexpr ostream_iterator() noexcept;
```

1 *Effects:* Initializes out\_stream and delim with nullptr.

```
ostream_iterator(ostream_type& s) noexcept;
```

2 *Effects:* Initializes out\_stream with &s and delim with nullptr.

```
ostream_iterator(ostream_type& s, const charT* delimiter) noexcept;
```

3 *Effects:* Initializes out\_stream with &s and delim with delimiter.

```
ostream_iterator(const ostream_iterator& x) noexcept;
```

4 *Effects:* Constructs a copy of x.

```
~ostream_iterator();
```

5 *Effects:* The iterator is destroyed.

**6.8.2.2 ostream\_iterator operations**

[ostream.iterator.ops]

```
ostream_iterator& operator=(const T& value);
```

1 *Effects:* Equivalent to:

```
*out_stream << value;
if(delim != nullptr)
    *out_stream << delim;
return *this;
```

```
ostream_iterator& operator*();
```

2 *Returns:* \*this.

```
ostream_iterator& operator++();
ostream_iterator operator++(int);
```

3 *Returns:* \*this.

**6.8.3 Class template istreambuf\_iterator**

[istreambuf.iterator]

1 The class template `istreambuf_iterator` defines an input iterator (6.2.9) that reads successive *characters* from the streambuf for which it was constructed. `operator*` provides access to the current input character, if any. [ *Note:* `operator->` may return a proxy. — *end note* ] Each time `operator++` is evaluated, the iterator advances to the next input character. If the end of stream is reached (`streambuf_type::sgetc()` returns `traits::eof()`), the iterator becomes equal to the *end-of-stream* iterator value. The default constructor `istreambuf_iterator()` and the constructor `istreambuf_iterator(nullptr)` both construct an end-of-stream iterator object suitable for use as an end-of-range. All specializations of `istreambuf_iterator` shall have a trivial copy constructor, a `constexpr` default constructor, and a trivial destructor.

2 The result of `operator*()` on an end-of-stream iterator is undefined. For any other iterator value a `char_-type` value is returned. It is impossible to assign a character via an input iterator.

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    template <class charT, class traits = char_traits<charT>>
    class istreambuf_iterator {
    public:
        typedef input_iterator_tag          iterator_category;
```

```

typedef charT value_type;
typedef typename traits::off_type difference_type;
typedef charT reference;
typedef unspecified pointer;
typedef charT char_type;
typedef traits traits_type;
typedef typename traits::int_type int_type;
typedef basic_streambuf<charT, traits> streambuf_type;
typedef basic_istream<charT, traits> istream_type;

class proxy; // exposition only

constexpr istreambuf_iterator() noexcept;
constexpr istreambuf_iterator(default_sentinel) noexcept;
istreambuf_iterator(const istreambuf_iterator&) noexcept = default;
~istreambuf_iterator() = default;
istreambuf_iterator(istream_type& s) noexcept;
istreambuf_iterator(streambuf_type* s) noexcept;
istreambuf_iterator(const proxy& p) noexcept;
charT operator*() const;
pointer operator->() const;
istreambuf_iterator& operator++();
proxy operator++(int);
bool equal(const istreambuf_iterator& b) const;
private:
    streambuf_type* sbuf_; // exposition only
};

template <class charT, class traits>
    bool operator==(const istreambuf_iterator<charT, traits>& a,
        const istreambuf_iterator<charT, traits>& b);
template <class charT, class traits>
    bool operator==(default_sentinel a,
        const istreambuf_iterator<charT, traits>& b);
template <class charT, class traits>
    bool operator==(const istreambuf_iterator<charT, traits>& a,
        default_sentinel b);
template <class charT, class traits>
    bool operator!=(const istreambuf_iterator<charT, traits>& a,
        const istreambuf_iterator<charT, traits>& b);
template <class charT, class traits>
    bool operator!=(default_sentinel a,
        const istreambuf_iterator<charT, traits>& b);
template <class charT, class traits>
    bool operator!=(const istreambuf_iterator<charT, traits>& a,
        default_sentinel b);
}}}}

```

### 6.8.3.1 Class template `istreambuf_iterator::proxy` [`istreambuf.iterator::proxy`]

```

namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    template <class charT, class traits = char_traits<charT>>
    class istreambuf_iterator<charT, traits>::proxy { // exposition only
        charT keep_;
        basic_streambuf<charT, traits>* sbuf_;
        proxy(charT c, basic_streambuf<charT, traits>* sbuf)

```

```

        : keep_(c), sbuf_(sbuf) { }
    public:
        charT operator*() { return keep_; }
    };
}}}
```

- <sup>1</sup> Class `istreambuf_iterator<charT, traits>::proxy` is for exposition only. An implementation is permitted to provide equivalent functionality without providing a class with this name. Class `istreambuf_iterator<charT, traits>::proxy` provides a temporary placeholder as the return value of the post-increment operator (`operator++`). It keeps the character pointed to by the previous value of the iterator for some possible future access to get the character.

### 6.8.3.2 `istreambuf_iterator` constructors [istreambuf.iterator.cons]

```
constexpr istreambuf_iterator() noexcept;
constexpr istreambuf_iterator(default_sentinel) noexcept;
```

- <sup>1</sup> *Effects:* Constructs the end-of-stream iterator.

```
istreambuf_iterator(basic_istream<charT, traits>& s) noexcept;
istreambuf_iterator(basic_streambuf<charT, traits>* s) noexcept;
```

- <sup>2</sup> *Effects:* Constructs an `istreambuf_iterator<>` that uses the `basic_streambuf<>` object `*(s.rdbuf())`, or `*s`, respectively. Constructs an end-of-stream iterator if `s.rdbuf()` is null.

```
istreambuf_iterator(const proxy& p) noexcept;
```

- <sup>3</sup> *Effects:* Constructs a `istreambuf_iterator<>` that uses the `basic_streambuf<>` object pointed to by the proxy object's constructor argument `p`.

### 6.8.3.3 `istreambuf_iterator::operator*` [istreambuf.iterator::op\*]

```
charT operator*() const
```

- <sup>1</sup> *Returns:* The character obtained via the `streambuf` member `sbuf_->sgetc()`.

### 6.8.3.4 `istreambuf_iterator::operator++` [istreambuf.iterator::op++]

```
istreambuf_iterator&
    istreambuf_iterator<charT, traits>::operator++();
```

- <sup>1</sup> *Effects:* Equivalent to `sbuf_->sbumpc()`.

- <sup>2</sup> *Returns:* `*this`.

```
proxy istreambuf_iterator<charT, traits>::operator++(int);
```

- <sup>3</sup> *Effects:* Equivalent to: `return proxy(sbuf_->sbumpc(), sbuf_);`

### 6.8.3.5 `istreambuf_iterator::equal` [istreambuf.iterator::equal]

```
bool equal(const istreambuf_iterator& b) const;
```

- <sup>1</sup> *Returns:* `true` if and only if both iterators are at end-of-stream, or neither is at end-of-stream, regardless of what `streambuf` object they use.

### 6.8.3.6 `operator==` [istreambuf.iterator::op==]

```
template <class charT, class traits>
    bool operator==(const istreambuf_iterator<charT, traits>& a,
                    const istreambuf_iterator<charT, traits>& b);
```

1 *Effects:* Equivalent to: `return a.equal(b);`

```
template <class charT, class traits>
    bool operator==(default_sentinel a,
                   const istreambuf_iterator<charT, traits>& b);
```

2 *Effects:* Equivalent to: `return istreambuf_iterator<charT, traits>{}.equal(b);`

```
template <class charT, class traits>
    bool operator==(const istreambuf_iterator<charT, traits>& a,
                   default_sentinel b);
```

3 *Effects:* Equivalent to: `return a.equal(istreambuf_iterator<charT, traits>{});`

### 6.8.3.7 operator!= [istreambuf.iterator::op!=]

```
template <class charT, class traits>
    bool operator!=(const istreambuf_iterator<charT, traits>& a,
                   const istreambuf_iterator<charT, traits>& b);
template <class charT, class traits>
    bool operator!=(default_sentinel a,
                   const istreambuf_iterator<charT, traits>& b);
template <class charT, class traits>
    bool operator!=(const istreambuf_iterator<charT, traits>& a,
                   default_sentinel b);
```

1 *Effects:* Equivalent to: `return !(a == b);`

### 6.8.4 Class template ostreambuf\_iterator [ostreambuf.iterator]

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    template <class charT, class traits = char_traits<charT>>
    class ostreambuf_iterator {
    public:
        typedef ptrdiff_t                difference_type;
        typedef charT                    char_type;
        typedef traits                    traits_type;
        typedef basic_streambuf<charT, traits> streambuf_type;
        typedef basic_ostream<charT, traits> ostream_type;

        constexpr ostreambuf_iterator() noexcept;
        ostreambuf_iterator(ostream_type& s) noexcept;
        ostreambuf_iterator(streambuf_type* s) noexcept;
        ostreambuf_iterator& operator=(charT c);

        ostreambuf_iterator& operator*();
        ostreambuf_iterator& operator++();
        ostreambuf_iterator operator++(int);
        bool failed() const noexcept;

    private:
        streambuf_type* sbuf_;                // exposition only
    };
}}}}
```

1 The class template `ostreambuf_iterator` writes successive *characters* onto the output stream from which it was constructed. It is not possible to get a character value out of the output iterator.

#### 6.8.4.1 ostreambuf\_iterator constructors [ostreambuf.iter.cons]

```
constexpr ostreambuf_iterator() noexcept;
1   Effects: Initializes sbuf_ with nullptr.

ostreambuf_iterator(ostream_type& s) noexcept;
2   Requires: s.rdbuf() != nullptr.
3   Effects: Initializes sbuf_ with s.rdbuf().

ostreambuf_iterator(streambuf_type* s) noexcept;
4   Requires: s != nullptr.
5   Effects: Initializes sbuf_ with s.
```

#### 6.8.4.2 ostreambuf\_iterator operations

[ostreambuf.iter.ops]

```
ostreambuf_iterator&
operator=(charT c);
1   Requires: sbuf_ != nullptr.
2   Effects: If failed() yields false, calls sbuf_->sputc(c); otherwise has no effect.
3   Returns: *this.

ostreambuf_iterator& operator*();
4   Returns: *this.

ostreambuf_iterator& operator++();
ostreambuf_iterator operator++(int);
5   Returns: *this.

bool failed() const noexcept;
6   Requires: sbuf_ != nullptr.
7   Returns: true if in any prior use of member operator=, the call to sbuf_->sputc() returned
traits::eof(); or false otherwise.
```

## 6.9 Range concepts

[ranges]

### 6.9.1 General

[ranges.general]

- 1 This subclause describes components for dealing with ranges of elements.
- 2 The following subclauses describe range and view requirements, and components for range primitives, pre-defined ranges, and stream ranges, as summarized in Table 7.

Table 7 — Ranges library summary

| Subclause | Header(s)                                   |
|-----------|---------------------------------------------|
| 6.9.2     | Requirements                                |
| 6.10      | Range access <experimental/ranges/iterator> |
| 6.11      | Range primitives                            |

## 6.9.2 Range requirements


[ranges.requirements]

### 6.9.2.1 In general

[ranges.requirements.general]

- 1 Ranges are an abstraction of containers that allow a C++ program to operate on elements of data structures uniformly. In their simplest form, a range object is one on which one can call `begin` and `end` to get an iterator (6.2.6) and a sentinel (6.2.7). To be able to construct template algorithms and range adaptors that work correctly and efficiently on different types of sequences, the library formalizes not just the interfaces but also the semantics and complexity assumptions of ranges.
- 2 This document defines three fundamental categories of ranges based on the syntax and semantics supported by each: *range*, *sized range* and *view*, as shown in Table 8.

Table 8 — Relations among range categories

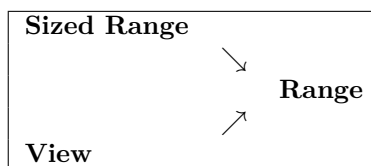

- 3 The **Range** concept requires only that `begin` and `end` return an iterator and a sentinel. The **SizedRange** concept refines **Range** with the requirement that the number of elements in the range can be determined in constant time using the `size` function. The **View** concept specifies requirements on an **Range** type with constant-time copy and assign operations.
- 4 In addition to the three fundamental range categories, this document defines a number of convenience refinements of **Range** that group together requirements that appear often in the concepts, algorithms, and range adaptors. *Bounded ranges* are ranges for which `begin` and `end` return objects of the same type. *Random access ranges* are ranges for which `begin` returns a type that satisfies **RandomAccessIterator** (6.2.13). The range categories *bidirectional ranges*, *forward ranges*, *input ranges*, and *output ranges* are defined similarly.

### 6.9.2.2 Ranges

[ranges.range]

- 1 The **Range** concept defines the requirements of a type that allows iteration over its elements by providing a `begin` iterator and an `end` sentinel. [Note: Most algorithms requiring this concept simply forward to an **Iterator**-based algorithm by calling `begin` and `end`. — end note]

```
template <class T>
using iterator_t = decltype(ranges::begin(declval<T&>()));
```

```
template <class T>
using sentinel_t = decltype(ranges::end(declval<T&>()));
```

```
template <class T>
concept bool Range() {
    return requires(T&& t) {
        ranges::end(t);
    };
}
```

- 2 Given an lvalue `t` of type `remove_reference_t<T>`, `Range<T>()` is satisfied if and only if
  - (2.1) — [`begin(t), end(t)`] denotes a range.
  - (2.2) — Both `begin(t)` and `end(t)` are amortized constant time and non-modifying. [Note: `begin(t)` and `end(t)` do not require implicit expression variants. — end note]
  - (2.3) — If `iterator_t<T>` satisfies **ForwardIterator**, `begin(t)` is equality preserving.

- <sup>3</sup> [*Note*: Equality preservation of both `begin` and `end` enables passing a `Range` whose iterator type satisfies `ForwardIterator` to multiple algorithms and making multiple passes over the range by repeated calls to `begin` and `end`. Since `begin` is not required to be equality preserving when the return type does not satisfy `ForwardIterator`, repeated calls might not return equal values or might not be well-defined; `begin` should be called at most once for such a range. — *end note*]

### 6.9.2.3 Sized ranges

[`ranges.sized`]

- <sup>1</sup> The `SizedRange` concept specifies the requirements of a `Range` type that knows its size in constant time with the `size` function.

```
template <class>
constexpr bool disable_sized_range = false;

template <class T>
concept bool SizedRange() {
    return Range<T>() &&
        !disable_sized_range<remove_cv_t<remove_reference_t<T>>> &&
        requires(const remove_reference_t<T>& t) {
            { ranges::size(t) } -> ConvertibleTo<difference_type_t<iterator_t<T>>>;
        };
};
```

- <sup>2</sup> Given an lvalue `t` of type `remove_reference_t<T>`, `SizedRange<T>()` is satisfied if and only if:
- (2.1) — `size(t)` returns the number of elements in `t`.
- (2.2) — If `iterator_t<T>` satisfies `ForwardIterator`, `size(t)` is well-defined regardless of the evaluation of `begin(t)`. [*Note*: `size(t)` is otherwise not required be well-defined after evaluating `begin(t)`. For a `SizedRange` whose iterator type does not model `ForwardIterator`, for example, `size(t)` might only be well-defined if evaluated before the first call to `begin(t)`. — *end note*]
- <sup>3</sup> [*Note*: The `disable_sized_range` predicate provides a mechanism to enable use of range types with the library that meet the syntactic requirements but do not in fact satisfy `SizedRange`. A program that instantiates a library template that requires a `Range` with such a range type `R` is ill-formed with no diagnostic required unless `disable_sized_range<remove_cv_t<remove_reference_t<R>>>` evaluates to `true` (3.3.1.3). — *end note*]

### 6.9.2.4 Views

[`ranges.view`]

- <sup>1</sup> The `View` concept specifies the requirements of a `Range` type that has constant time copy, move and assignment operators; that is, the cost of these operations is not proportional to the number of elements in the `View`.
- <sup>2</sup> [*Example*: Examples of `Views` are:
- (2.1) — A `Range` type that wraps a pair of iterators.
- (2.2) — A `Range` type that holds its elements by `shared_ptr` and shares ownership with all its copies.
- (2.3) — A `Range` type that generates its elements on demand.

A container (ISO/IEC 14882:2014 §23) is not a `View` since copying the container copies the elements, which cannot be done in constant time. — *end example*]

```
template <class T>
struct enable_view { };

struct view_base { };
```

```

// exposition only
template <class T>
constexpr bool __view_predicate = see below;

template <class T>
concept bool View() {
    return Range<T>() &&
        Semiregular<T>() &&
        __view_predicate<T>;
}

```

3 Since the difference between `Range` and `View` is largely semantic, the two are differentiated with the help of the `enable_view` trait. Users may specialize `enable_view` to derive from `true_type` or `false_type`.

4 For a type `T`, the value of `__view_predicate<T>` shall be:

- (4.1) — If `enable_view<T>` has a member type `type`, `enable_view<T>::type::value`;
- (4.2) — Otherwise, if `T` is derived from `view_base`, `true`;
- (4.3) — Otherwise, if `T` is an instantiation of class template `initializer_list` (ISO/IEC 14882:2014 §18.9), `set` (ISO/IEC 14882:2014 §23.4.6), `multiset` (ISO/IEC 14882:2014 §23.4.7), `unordered_set` (ISO/IEC 14882:2014 §23.5.6), or `unordered_multiset` (ISO/IEC 14882:2014 §23.5.7), `false`;
- (4.4) — Otherwise, if both `T` and `const T` satisfy `Range` and `reference_t <iterator_t<T>>` is not the same type as `reference_t <iterator_t<const T>>`, `false`; [*Note*: Deep `const`-ness implies element ownership, whereas shallow `const`-ness implies reference semantics. — *end note*]
- (4.5) — Otherwise, `true`.

### 6.9.2.5 Bounded ranges

[`ranges.bounded`]

1 The `BoundedRange` concept specifies requirements of an `Range` type for which `begin` and `end` return objects of the same type. [*Note*: The standard containers (ISO/IEC 14882:2014 §23) satisfy `BoundedRange`. — *end note*]

```

template <class T>
concept bool BoundedRange() {
    return Range<T>() && Same<iterator_t<T>, sentinel_t<T>>();
}

```

### 6.9.2.6 Input ranges

[`ranges.input`]

1 The `InputRange` concept specifies requirements of an `Range` type for which `begin` returns a type that satisfies `InputIterator` (6.2.9).

```

template <class T>
concept bool InputRange() {
    return Range<T>() && InputIterator<iterator_t<T>>();
}

```

### 6.9.2.7 Output ranges

[`ranges.output`]

1 The `OutputRange` concept specifies requirements of an `Range` type for which `begin` returns a type that satisfies `OutputIterator` (6.2.10).

```

template <class R, class T>
concept bool OutputRange() {
    return Range<R>() && OutputIterator<iterator_t<R>, T>();
}

```



### 6.9.2.8 Forward ranges [ranges.forward]

- <sup>1</sup> The `ForwardRange` concept specifies requirements of an `InputRange` type for which `begin` returns a type that satisfies `ForwardIterator` (6.2.11).

```
template <class T>
concept bool ForwardRange() {
    return InputRange<T>() && ForwardIterator<iterator_t<T>>();
}
```

### 6.9.2.9 Bidirectional ranges [ranges.bidirectional]

- <sup>1</sup> The `BidirectionalRange` concept specifies requirements of a `ForwardRange` type for which `begin` returns a type that satisfies `BidirectionalIterator` (6.2.12).

```
template <class T>
concept bool BidirectionalRange() {
    return ForwardRange<T>() && BidirectionalIterator<iterator_t<T>>();
}
```

### 6.9.2.10 Random access ranges [ranges.random.access]

- <sup>1</sup> The `RandomAccessRange` concept specifies requirements of a `BidirectionalRange` type for which `begin` returns a type that satisfies `RandomAccessIterator` (6.2.13).

```
template <class T>
concept bool RandomAccessRange() {
    return BidirectionalRange<T>() && RandomAccessIterator<iterator_t<T>>();
}
```

## 6.10 Range access [iterator.range]

### 6.10.1 `begin` [iterator.range.begin]

- <sup>1</sup> The name `begin` denotes a customization point object (3.3.2.3). The effect of the expression `ranges::begin(E)` for some expression `E` is equivalent to:

- (1.1) — `ranges::begin(static_cast<const T&>(E))` if `E` is an rvalue of type `T`. This usage is deprecated. [Note: This deprecated usage exists so that `ranges::begin(E)` behaves similarly to `std::begin(E)` as defined in ISO/IEC 14882 when `E` is an rvalue. — end note]
- (1.2) — Otherwise, `(E) + 0` if `E` has array type (ISO/IEC 14882:2014 §3.9.2).
- (1.3) — Otherwise, `DECAY_COPY((E).begin())` if it is a valid expression and its type `I` meets the syntactic requirements of `Iterator<I>()`. If `Iterator` is not satisfied, the program is ill-formed with no diagnostic required.
- (1.4) — Otherwise, `DECAY_COPY(begin(E))` if it is a valid expression and its type `I` meets the syntactic requirements of `Iterator<I>()` with overload resolution performed in a context that includes the declaration `void begin(auto&) = delete`; and does not include a declaration of `ranges::begin`. If `Iterator` is not satisfied, the program is ill-formed with no diagnostic required.
- (1.5) — Otherwise, `ranges::begin(E)` is ill-formed.

- <sup>2</sup> [Note: Whenever `ranges::begin(E)` is a valid expression, its type satisfies `Iterator`. — end note]

**6.10.2 end** **[iterator.range.end]**

- 1 The name `end` denotes a customization point object (3.3.2.3). The effect of the expression `ranges::end(E)` for some expression `E` is equivalent to:
- (1.1) — `ranges::end(static_cast<const T&>(E))` if `E` is an rvalue of type `T`. This usage is deprecated. [*Note:* This deprecated usage exists so that `ranges::end(E)` behaves similarly to `std::end(E)` as defined in ISO/IEC 14882 when `E` is an rvalue. — *end note*]
  - (1.2) — Otherwise, `(E) + extent<T>::value` if `E` has array type (ISO/IEC 14882:2014 §3.9.2) `T`.
  - (1.3) — Otherwise, `DECAY_COPY((E).end())` if it is a valid expression and its type `S` meets the syntactic requirements of `Sentinel<S, decltype(ranges::begin(E))>()`. If `Sentinel` is not satisfied, the program is ill-formed with no diagnostic required.
  - (1.4) — Otherwise, `DECAY_COPY(end(E))` if it is a valid expression and its type `S` meets the syntactic requirements of `Sentinel<S, decltype(ranges::begin(E))>()` with overload resolution performed in a context that includes the declaration `void end(auto&) = delete;` and does not include a declaration of `ranges::end`. If `Sentinel` is not satisfied, the program is ill-formed with no diagnostic required.
  - (1.5) — Otherwise, `ranges::end(E)` is ill-formed.
- 2 [*Note:* Whenever `ranges::end(E)` is a valid expression, the types of `ranges::end(E)` and `ranges::begin(E)` satisfy `Sentinel`. — *end note*]

**6.10.3 cbegin** **[iterator.range.cbegin]**

- 1 The name `cbegin` denotes a customization point object (3.3.2.3). The effect of the expression `ranges::cbegin(E)` for some expression `E` of type `T` is equivalent to `ranges::begin(static_const<const T&>(E))`.
- 2 Use of `ranges::cbegin(E)` with rvalue `E` is deprecated. [*Note:* This deprecated usage exists so that `ranges::cbegin(E)` behaves similarly to `std::cbegin(E)` as defined in ISO/IEC 14882 when `E` is an rvalue. — *end note*]
- 3 [*Note:* Whenever `ranges::cbegin(E)` is a valid expression, its type satisfies `Iterator`. — *end note*]

**6.10.4 cend** **[iterator.range.cend]**

- 1 The name `cend` denotes a customization point object (3.3.2.3). The effect of the expression `ranges::cend(E)` for some expression `E` of type `T` is equivalent to `ranges::end(static_cast<const T&>(E))`.
- 2 Use of `ranges::cend(E)` with rvalue `E` is deprecated. [*Note:* This deprecated usage exists so that `ranges::cend(E)` behaves similarly to `std::cend(E)` as defined in ISO/IEC 14882 when `E` is an rvalue. — *end note*]
- 3 [*Note:* Whenever `ranges::cend(E)` is a valid expression, the types of `ranges::cend(E)` and `ranges::cbegin(E)` satisfy `Sentinel`. — *end note*]

**6.10.5 rbegin** **[iterator.range.rbegin]**

- 1 The name `rbegin` denotes a customization point object (3.3.2.3). The effect of the expression `ranges::rbegin(E)` for some expression `E` is equivalent to:
- (1.1) — `ranges::rbegin(static_cast<const T&>(E))` if `E` is an rvalue of type `T`. This usage is deprecated. [*Note:* This deprecated usage exists so that `ranges::rbegin(E)` behaves similarly to `std::rbegin(E)` as defined in ISO/IEC 14882 when `E` is an rvalue. — *end note*]
  - (1.2) — Otherwise, `DECAY_COPY((E).rbegin())` if it is a valid expression and its type `I` meets the syntactic requirements of `Iterator<I>()`. If `Iterator` is not satisfied, the program is ill-formed with no diagnostic required.

- (1.3) — Otherwise, `make_reverse_iterator(ranges::end(E))` if both `ranges::begin(E)` and `ranges::end(E)` are valid expressions of the same type `I` which meets the syntactic requirements of `BidirectionalIterator<I>()` (6.2.12)
- (1.4) — Otherwise, `ranges::rbegin(E)` is ill-formed.
- 2 [Note: Whenever `ranges::rbegin(E)` is a valid expression, its type satisfies `Iterator`. — end note]

### 6.10.6 `rend` [iterator.range.rend]

- 1 The name `rend` denotes a customization point object (3.3.2.3). The effect of the expression `ranges::rend(E)` for some expression `E` is equivalent to:
- (1.1) — `ranges::rend(static_cast<const T&>(E))` if `E` is an rvalue of type `T`. This usage is deprecated. [Note: This deprecated usage exists so that `ranges::rend(E)` behaves similarly to `std::rend(E)` as defined in ISO/IEC 14882 when `E` is an rvalue. — end note]
- (1.2) — Otherwise, `DECAY_COPY((E).rend())` if it is a valid expression and its type `S` meets the syntactic requirements of `Sentinel<S, decltype(ranges::rbegin(E))>()`. If `Sentinel` is not satisfied, the program is ill-formed with no diagnostic required.
- (1.3) — Otherwise, `make_reverse_iterator(ranges::begin(E))` if both `ranges::begin(E)` and `ranges::end(E)` are valid expressions of the same type `I` which meets the syntactic requirements of `BidirectionalIterator<I>()` (6.2.12)
- (1.4) — Otherwise, `ranges::rend(E)` is ill-formed.
- 2 [Note: Whenever `ranges::rend(E)` is a valid expression, the types of `ranges::rend(E)` and `ranges::rbegin(E)` satisfy `Sentinel`. — end note]

### 6.10.7 `crbegin` [iterator.range.crbegin]

- 1 The name `crbegin` denotes a customization point object (3.3.2.3). The effect of the expression `ranges::crbegin(E)` for some expression `E` of type `T` is equivalent to `ranges::rbegin(static_cast<const T&>(E))`.
- 2 Use of `ranges::crbegin(E)` with rvalue `E` is deprecated. [Note: This deprecated usage exists so that `ranges::crbegin(E)` behaves similarly to `std::crbegin(E)` as defined in ISO/IEC 14882 when `E` is an rvalue. — end note]
- 3 [Note: Whenever `ranges::crbegin(E)` is a valid expression, its type satisfies `Iterator`. — end note]

### 6.10.8 `crend` [iterator.range.crend]

- 1 The name `crend` denotes a customization point object (3.3.2.3). The effect of the expression `ranges::crend(E)` for some expression `E` of type `T` is equivalent to `ranges::rend(static_cast<const T&>(E))`.
- 2 Use of `ranges::crend(E)` with rvalue `E` is deprecated. [Note: This deprecated usage exists so that `ranges::crend(E)` behaves similarly to `std::crend(E)` as defined in ISO/IEC 14882 when `E` is an rvalue. — end note]
- 3 [Note: Whenever `ranges::crend(E)` is a valid expression, the types of `ranges::crend(E)` and `ranges::crbegin(E)` satisfy `Sentinel`. — end note]

## 6.11 Range primitives [range.primitives]

```
template <Range R>
difference_type_t<iterator_t<R>> distance(R&& r);
```

- 1 *Effects:* Equivalent to: `return ranges::distance(ranges::begin(r), ranges::end(r));`

```
template <SizedRange R>
difference_type_t<iterator_t<R>> distance(R&& r);
```

- 2 *Effects:* Equivalent to: `return ranges::size(r);`

### 6.11.1 `size` [`range.primitives.size`]

- <sup>1</sup> The name `size` denotes a customization point object (3.3.2.3). The effect of the expression `ranges::size(E)` for some expression `E` with type `T` is equivalent to:
- (1.1) — `extent<T>::value` if `T` is an array type (ISO/IEC 14882:2014 §3.9.2).
  - (1.2) — Otherwise, `DECAY_COPY(static_cast<const T&>(E).size())` if it is a valid expression and its type `I` satisfies `Integral<I>()` and `disable_sized_range<T>` (6.9.2.3) is `false`.
  - (1.3) — Otherwise, `DECAY_COPY(size(static_cast<const T&>(E)))` if it is a valid expression and its type `I` satisfies `Integral<I>()` with overload resolution performed in a context that includes the declaration `void size(const auto&) = delete;` and does not include a declaration of `ranges::size`, and `disable_sized_range<T>` is `false`.
  - (1.4) — Otherwise, `DECAY_COPY(ranges::cend(E) - ranges::cbegin(E))`, except that `E` is only evaluated once, if it is a valid expression and the types `I` and `S` of `ranges::cbegin(E)` and `ranges::cend(E)` meet the syntactic requirements of `SizedSentinel<S, I>()` (6.2.8) and `ForwardIterator<I>()`. If `SizedSentinel` and `ForwardIterator` are not satisfied, the program is ill-formed with no diagnostic required.
  - (1.5) — Otherwise, `ranges::size(E)` is ill-formed.
- <sup>2</sup> [*Note*: Whenever `ranges::size(E)` is a valid expression, its type satisfies `Integral`. — *end note*]

### 6.11.2 `empty` [`range.primitives.empty`]

- <sup>1</sup> The name `empty` denotes a customization point object (3.3.2.3). The effect of the expression `ranges::empty(E)` for some expression `E` is equivalent to:
- (1.1) — `bool((E).empty())` if it is a valid expression.
  - (1.2) — Otherwise, `ranges::size(E) == 0` if it is a valid expression.
  - (1.3) — Otherwise, `bool(ranges::begin(E) == ranges::end(E))`, except that `E` is only evaluated once, if it is a valid expression and the type of `ranges::begin(E)` satisfies `ForwardIterator`.
  - (1.4) — Otherwise, `ranges::empty(E)` is ill-formed.
- <sup>2</sup> [*Note*: Whenever `ranges::empty(E)` is a valid expression, it has type `bool`. — *end note*]

### 6.11.3 `data` [`range.primitives.data`]

- <sup>1</sup> The name `data` denotes a customization point object (3.3.2.3). The effect of the expression `ranges::data(E)` for some expression `E` is equivalent to:
- (1.1) — `ranges::data(static_cast<const T&>(E))` if `E` is an rvalue of type `T`. This usage is deprecated. [*Note*: This deprecated usage exists so that `ranges::data(E)` behaves similarly to `std::data(E)` as defined in the C++ Working Paper when `E` is an rvalue. — *end note*]
  - (1.2) — Otherwise, `DECAY_COPY((E).data())` if it is a valid expression of pointer to object type.
  - (1.3) — Otherwise, `ranges::begin(E)` if it is a valid expression of pointer to object type.
  - (1.4) — Otherwise, `ranges::data(E)` is ill-formed.
- <sup>2</sup> [*Note*: Whenever `ranges::data(E)` is a valid expression, it has pointer to object type. — *end note*]

**6.11.4 cdata****[range.primitives.cdata]**

- <sup>1</sup> The name `cdata` denotes a customization point object (3.3.2.3). The effect of the expression `ranges::cdata(E)` for some expression `E` of type `T` is equivalent to `ranges::data(static_cast<const T&>(E))`.
- <sup>2</sup> Use of `ranges::cdata(E)` with rvalue `E` is deprecated. [*Note:* This deprecated usage exists so that `ranges::cdata(E)` has behavior consistent with `ranges::data(E)` when `E` is an rvalue. — *end note*]
- <sup>3</sup> [*Note:* Whenever `ranges::cdata(E)` is a valid expression, it has pointer to object type. — *end note*]

## 7 Algorithms library

[algorithms]

### 7.1 General

[algorithms.general]

- <sup>1</sup> This Clause describes components that C++ programs may use to perform algorithmic operations on containers (Clause ISO/IEC 14882:2014 §23) and other sequences.
- <sup>2</sup> The following subclasses describe components for non-modifying sequence operations, modifying sequence operations, sorting and related operations, and algorithms from the ISO C library, as summarized in Table 9.

Table 9 — Algorithms library summary

| Subclause                             | Header(s)                       |
|---------------------------------------|---------------------------------|
| 7.3 Non-modifying sequence operations |                                 |
| 7.4 Mutating sequence operations      | <experimental/ranges/algorithm> |
| 7.5 Sorting and related operations    |                                 |
| 7.6 C library algorithms              | <cstdlib>                       |

#### Header <experimental/ranges/algorithm> synopsis

```
#include <initializer_list>

namespace std { namespace experimental { namespace ranges { inline namespace v1 {
  namespace tag {
    // 7.2, tag specifiers (See 5.5.2):
    struct in;
    struct in1;
    struct in2;
    struct out;
    struct out1;
    struct out2;
    struct fun;
    struct min;
    struct max;
    struct begin;
    struct end;
  }
}

// 7.3, non-modifying sequence operations:
template <InputIterator I, Sentinel<I> S, class Proj = identity,
         IndirectPredicate<projected<I, Proj>> Pred>
  bool all_of(I first, S last, Pred pred, Proj proj = Proj{});

template <InputRange Rng, class Proj = identity,
         IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
  bool all_of(Rng&& rng, Pred pred, Proj proj = Proj{});

template <InputIterator I, Sentinel<I> S, class Proj = identity,
         IndirectPredicate<projected<I, Proj>> Pred>
  bool any_of(I first, S last, Pred pred, Proj proj = Proj{});

template <InputRange Rng, class Proj = identity,
```

```

    IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
    bool any_of(Rng&& rng, Pred pred, Proj proj = Proj{});

template <InputIterator I, Sentinel<I> S, class Proj = identity,
    IndirectPredicate<projected<I, Proj>> Pred>
    bool none_of(I first, S last, Pred pred, Proj proj = Proj{});

template <InputRange Rng, class Proj = identity,
    IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
    bool none_of(Rng&& rng, Pred pred, Proj proj = Proj{});

template <InputIterator I, Sentinel<I> S, class Proj = identity,
    IndirectInvocable<projected<I, Proj>> Fun>
    tagged_pair<tag::in(I), tag::fun(Fun)>
    for_each(I first, S last, Fun f, Proj proj = Proj{});

template <InputRange Rng, class Proj = identity,
    IndirectInvocable<projected<iterator_t<Rng>, Proj>> Fun>
    tagged_pair<tag::in(unsafe_iterator_t<Rng>), tag::fun(Fun)>
    for_each(Rng&& rng, Fun f, Proj proj = Proj{});

template <InputIterator I, Sentinel<I> S, class T, class Proj = identity>
    requires IndirectRelation<equal_to<>, projected<I, Proj>, const T*>()
    I find(I first, S last, const T& value, Proj proj = Proj{});

template <InputRange Rng, class T, class Proj = identity>
    requires IndirectRelation<equal_to<>, projected<iterator_t<Rng>, Proj>, const T*>()
    safe_iterator_t<Rng>
    find(Rng&& rng, const T& value, Proj proj = Proj{});

template <InputIterator I, Sentinel<I> S, class Proj = identity,
    IndirectPredicate<projected<I, Proj>> Pred>
    I find_if(I first, S last, Pred pred, Proj proj = Proj{});

template <InputRange Rng, class Proj = identity,
    IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
    safe_iterator_t<Rng>
    find_if(Rng&& rng, Pred pred, Proj proj = Proj{});

template <InputIterator I, Sentinel<I> S, class Proj = identity,
    IndirectPredicate<projected<I, Proj>> Pred>
    I find_if_not(I first, S last, Pred pred, Proj proj = Proj{});

template <InputRange Rng, class Proj = identity,
    IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
    safe_iterator_t<Rng>
    find_if_not(Rng&& rng, Pred pred, Proj proj = Proj{});

template <ForwardIterator I1, Sentinel<I1> S1, ForwardIterator I2,
    Sentinel<I2> S2, class Proj = identity,
    IndirectRelation<I2, projected<I1, Proj>> Pred = equal_to<>>
    I1
    find_end(I1 first1, S1 last1, I2 first2, S2 last2,
        Pred pred = Pred{}, Proj proj = Proj{});

```

```

template <ForwardRange Rng1, ForwardRange Rng2, class Proj = identity,
        IndirectRelation<iterator_t<Rng2>,
        projected<iterator_t<Rng>, Proj>> Pred = equal_to<>>
        safe_iterator_t<Rng1>
        find_end(Rng1&& rng1, Rng2&& rng2, Pred pred = Pred{}, Proj proj = Proj{});

template <InputIterator I1, Sentinel<I1> S1, ForwardIterator I2, Sentinel<I2> S2,
        class Proj1 = identity, class Proj2 = identity,
        IndirectPredicate<projected<I1, Proj1>, projected<I2, Proj2>> Pred = equal_to<>>
        I1
        find_first_of(I1 first1, S1 last1, I2 first2, S2 last2,
                Pred pred = Pred{},
                Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputRange Rng1, ForwardRange Rng2, class Proj1 = identity,
        class Proj2 = identity,
        IndirectPredicate<projected<iterator_t<Rng1>, Proj1>,
        projected<iterator_t<Rng2>, Proj2>> Pred = equal_to<>>
        safe_iterator_t<Rng1>
        find_first_of(Rng1&& rng1, Rng2&& rng2,
                Pred pred = Pred{},
                Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
        IndirectRelation<projected<I, Proj>> Pred = equal_to<>>
        I
        adjacent_find(I first, S last, Pred pred = Pred{},
                Proj proj = Proj{});

template <ForwardRange Rng, class Proj = identity,
        IndirectRelation<projected<iterator_t<Rng>, Proj>> Pred = equal_to<>>
        safe_iterator_t<Rng>
        adjacent_find(Rng&& rng, Pred pred = Pred{}, Proj proj = Proj{});

template <InputIterator I, Sentinel<I> S, class T, class Proj = identity>
        requires IndirectRelation<equal_to<>, projected<I, Proj>, const T*>()
        difference_type_t<I>
        count(I first, S last, const T& value, Proj proj = Proj{});

template <InputRange Rng, class T, class Proj = identity>
        requires IndirectRelation<equal_to<>, projected<iterator_t<Rng>, Proj>, const T*>()
        difference_type_t<iterator_t<Rng>>
        count(Rng&& rng, const T& value, Proj proj = Proj{});

template <InputIterator I, Sentinel<I> S, class Proj = identity,
        IndirectPredicate<projected<I, Proj>> Pred>
        difference_type_t<I>
        count_if(I first, S last, Pred pred, Proj proj = Proj{});

template <InputRange Rng, class Proj = identity,
        IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
        difference_type_t<iterator_t<Rng>>
        count_if(Rng&& rng, Pred pred, Proj proj = Proj{});

// A.2 (deprecated):

```



```

template <InputIterator I1, Sentinel<I1> S1, InputIterator I2,
    class Proj1 = identity, class Proj2 = identity,
    IndirectPredicate<projected<I1, Proj1>, projected<I2, Proj2>> Pred = equal_to<>>
tagged_pair<tag::in1(I1), tag::in2(I2)>
mismatch(I1 first1, S1 last1, I2 first2, Pred pred = Pred{}),
    Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

// A.2 (deprecated):
template <InputRange Rng1, InputIterator I2,
    class Proj1 = identity, class Proj2 = identity,
    IndirectPredicate<projected<iterator_t<Rng1>, Proj1>,
    projected<I2, Proj2>> Pred = equal_to<>>
tagged_pair<tag::in1(safe_iterator_t<Rng1>), tag::in2(I2)>
mismatch(Rng1&& rng1, I2 first2, Pred pred = Pred{}),
    Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
    class Proj1 = identity, class Proj2 = identity,
    IndirectPredicate<projected<I1, Proj1>, projected<I2, Proj2>> Pred = equal_to<>>
tagged_pair<tag::in1(I1), tag::in2(I2)>
mismatch(I1 first1, S1 last1, I2 first2, S2 last2, Pred pred = Pred{}),
    Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputRange Rng1, InputRange Rng2,
    class Proj1 = identity, class Proj2 = identity,
    IndirectPredicate<projected<iterator_t<Rng1>, Proj1>,
    projected<iterator_t<Rng2>, Proj2>> Pred = equal_to<>>
tagged_pair<tag::in1(safe_iterator_t<Rng1>),
    tag::in2(safe_iterator_t<Rng2>>>
mismatch(Rng1&& rng1, Rng2&& rng2, Pred pred = Pred{}),
    Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

// A.2 (deprecated):
template <InputIterator I1, Sentinel<I1> S1, InputIterator I2,
    class Pred = equal_to<>, class Proj1 = identity, class Proj2 = identity>
requires IndirectlyComparable<I1, I2, Pred, Proj1, Proj2>()
bool equal(I1 first1, S1 last1,
    I2 first2, Pred pred = Pred{}),
    Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

// A.2 (deprecated):
template <InputRange Rng1, InputIterator I2, class Pred = equal_to<>,
    class Proj1 = identity, class Proj2 = identity>
requires IndirectlyComparable<iterator_t<Rng1>, I2, Pred, Proj1, Proj2>()
bool equal(Rng1&& rng1, I2 first2, Pred pred = Pred{}),
    Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
    class Pred = equal_to<>, class Proj1 = identity, class Proj2 = identity>
requires IndirectlyComparable<I1, I2, Pred, Proj1, Proj2>()
bool equal(I1 first1, S1 last1, I2 first2, S2 last2,
    Pred pred = Pred{}),
    Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputRange Rng1, InputRange Rng2, class Pred = equal_to<>,

```

```

    class Proj1 = identity, class Proj2 = identity>
    requires IndirectlyComparable<iterator_t<Rng1>, iterator_t<Rng2>, Pred, Proj1, Proj2>()
    bool equal(Rng1&& rng1, Rng2&& rng2, Pred pred = Pred{},
              Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

// A.2 (deprecated):
template <ForwardIterator I1, Sentinel<I1> S1, ForwardIterator I2,
         class Pred = equal_to<>, class Proj1 = identity, class Proj2 = identity>
    requires IndirectlyComparable<I1, I2, Pred, Proj1, Proj2>()
    bool is_permutation(I1 first1, S1 last1, I2 first2,
                       Pred pred = Pred{},
                       Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

// A.2 (deprecated):
template <ForwardRange Rng1, ForwardIterator I2, class Pred = equal_to<>,
         class Proj1 = identity, class Proj2 = identity>
    requires IndirectlyComparable<iterator_t<Rng1>, I2, Pred, Proj1, Proj2>()
    bool is_permutation(Rng1&& rng1, I2 first2, Pred pred = Pred{},
                       Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <ForwardIterator I1, Sentinel<I1> S1, ForwardIterator I2,
         Sentinel<I2> S2, class Pred = equal_to<>, class Proj1 = identity,
         class Proj2 = identity>
    requires IndirectlyComparable<I1, I2, Pred, Proj1, Proj2>()
    bool is_permutation(I1 first1, S1 last1, I2 first2, S2 last2,
                       Pred pred = Pred{},
                       Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <ForwardRange Rng1, ForwardRange Rng2, class Pred = equal_to<>,
         class Proj1 = identity, class Proj2 = identity>
    requires IndirectlyComparable<iterator_t<Rng1>, iterator_t<Rng2>, Pred, Proj1, Proj2>()
    bool is_permutation(Rng1&& rng1, Rng2&& rng2, Pred pred = Pred{},
                       Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <ForwardIterator I1, Sentinel<I1> S1, ForwardIterator I2,
         Sentinel<I2> S2, class Pred = equal_to<>,
         class Proj1 = identity, class Proj2 = identity>
    requires IndirectlyComparable<I1, I2, Pred, Proj1, Proj2>()
    I1
    search(I1 first1, S1 last1, I2 first2, S2 last2,
          Pred pred = Pred{},
          Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <ForwardRange Rng1, ForwardRange Rng2, class Pred = equal_to<>,
         class Proj1 = identity, class Proj2 = identity>
    requires IndirectlyComparable<iterator_t<Rng1>, iterator_t<Rng2>, Pred, Proj1, Proj2>()
    safe_iterator_t<Rng1>
    search(Rng1&& rng1, Rng2&& rng2, Pred pred = Pred{},
          Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <ForwardIterator I, Sentinel<I> S, class T,
         class Pred = equal_to<>, class Proj = identity>
    requires IndirectlyComparable<I, const T*, Pred, Proj>()
    I
    search_n(I first, S last, difference_type_t<I> count,

```

```

        const T& value, Pred pred = Pred{},
        Proj proj = Proj{});

template <ForwardRange Rng, class T, class Pred = equal_to<>,
        class Proj = identity>
requires IndirectlyComparable<iterator_t<Rng>, const T*, Pred, Proj>()
safe_iterator_t<Rng>
search_n(Rng&& rng, difference_type_t<iterator_t<Rng>> count,
        const T& value, Pred pred = Pred{}, Proj proj = Proj{});

// 7.4, modifying sequence operations:
// 7.4.1, copy:
template <InputIterator I, Sentinel<I> S, WeaklyIncrementable O>
requires IndirectlyCopyable<I, O>()
tagged_pair<tag::in(I), tag::out(O)>
copy(I first, S last, O result);

template <InputRange Rng, WeaklyIncrementable O>
requires IndirectlyCopyable<iterator_t<Rng>, O>()
tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(O)>
copy(Rng&& rng, O result);

template <InputIterator I, WeaklyIncrementable O>
requires IndirectlyCopyable<I, O>()
tagged_pair<tag::in(I), tag::out(O)>
copy_n(I first, difference_type_t<I> n, O result);

template <InputIterator I, Sentinel<I> S, WeaklyIncrementable O, class Proj = identity,
        IndirectPredicate<projected<I, Proj>> Pred>
requires IndirectlyCopyable<I, O>()
tagged_pair<tag::in(I), tag::out(O)>
copy_if(I first, S last, O result, Pred pred, Proj proj = Proj{});

template <InputRange Rng, WeaklyIncrementable O, class Proj = identity,
        IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
requires IndirectlyCopyable<iterator_t<Rng>, O>()
tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(O)>
copy_if(Rng&& rng, O result, Pred pred, Proj proj = Proj{});

template <BidirectionalIterator I1, Sentinel<I1> S1, BidirectionalIterator I2>
requires IndirectlyCopyable<I1, I2>()
tagged_pair<tag::in(I1), tag::out(I2)>
copy_backward(I1 first, S1 last, I2 result);

template <BidirectionalRange Rng, BidirectionalIterator I>
requires IndirectlyCopyable<iterator_t<Rng>, I>()
tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(I)>
copy_backward(Rng&& rng, I result);

// 7.4.2, move:
template <InputIterator I, Sentinel<I> S, WeaklyIncrementable O>
requires IndirectlyMovable<I, O>()
tagged_pair<tag::in(I), tag::out(O)>
move(I first, S last, O result);

```

```

template <InputRange Rng, WeaklyIncrementable O>
  requires IndirectlyMovable<iterator_t<Rng>, O>()
  tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(O)>
    move(Rng&& rng, O result);

template <BidirectionalIterator I1, Sentinel<I1> S1, BidirectionalIterator I2>
  requires IndirectlyMovable<I1, I2>()
  tagged_pair<tag::in(I1), tag::out(I2)>
    move_backward(I1 first, S1 last, I2 result);

template <BidirectionalRange Rng, BidirectionalIterator I>
  requires IndirectlyMovable<iterator_t<Rng>, I>()
  tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(I)>
    move_backward(Rng&& rng, I result);

// 7.4.3, swap, A.2 (deprecated):
template <ForwardIterator I1, Sentinel<I1> S1, ForwardIterator I2>
  requires IndirectlySwappable<I1, I2>()
  tagged_pair<tag::in1(I1), tag::in2(I2)>
    swap_ranges(I1 first1, S1 last1, I2 first2);

// A.2 (deprecated):
template <ForwardRange Rng, ForwardIterator I>
  requires IndirectlySwappable<iterator_t<Rng>, I>()
  tagged_pair<tag::in1(safe_iterator_t<Rng>), tag::in2(I)>
    swap_ranges(Rng&& rng1, I first2);

template <ForwardIterator I1, Sentinel<I1> S1, ForwardIterator I2, Sentinel<I2> S2>
  requires IndirectlySwappable<I1, I2>()
  tagged_pair<tag::in1(I1), tag::in2(I2)>
    swap_ranges(I1 first1, S1 last1, I2 first2, S2 last2);

template <ForwardRange Rng1, ForwardRange Rng2>
  requires IndirectlySwappable<iterator_t<Rng1>, iterator_t<Rng2>>()
  tagged_pair<tag::in1(safe_iterator_t<Rng1>), tag::in2(safe_iterator_t<Rng2>>>()
    swap_ranges(Rng1&& rng1, Rng2&& rng2);

template <InputIterator I, Sentinel<I> S, WeaklyIncrementable O, class F, class Proj = identity>
  requires Writable<O, indirect_result_of_t<F&(projected<I, Proj>>>)>()
  tagged_pair<tag::in(I), tag::out(O)>
    transform(I first, S last, O result, F op, Proj proj = Proj{});

template <InputRange Rng, WeaklyIncrementable O, class F, class Proj = identity>
  requires Writable<O, indirect_result_of_t<F&(
    projected<iterator_t<R>, Proj>>>)>()
  tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(O)>
    transform(Rng&& rng, O result, F op, Proj proj = Proj{});

// A.2 (deprecated):
template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, WeaklyIncrementable O,
  class F, class Proj1 = identity, class Proj2 = identity>
  requires Writable<O, indirect_result_of_t<F&(projected<I1, Proj1>,
    projected<I2, Proj2>>>>)>()
  tagged_tuple<tag::in1(I1), tag::in2(I2), tag::out(O)>
    transform(I1 first1, S1 last1, I2 first2, O result,

```

```

        F binary_op, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

// A.2 (deprecated):
template <InputRange Rng, InputIterator I, WeaklyIncrementable O, class F,
        class Proj1 = identity, class Proj2 = identity>
    requires Writable<O, indirect_result_of_t<F&(
        projected<iterator_t<Rng>, Proj1>, projected<I, Proj2>>>>()
    tagged_tuple<tag::in1(safe_iterator_t<Rng>), tag::in2(I), tag::out(O)>
        transform(Rng&& rng1, I first2, O result,
            F binary_op, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
        WeaklyIncrementable O, class F, class Proj1 = identity, class Proj2 = identity>
    requires Writable<O, indirect_result_of_t<F&(projected<I1, Proj1>,
        projected<I2, Proj2>>>>()
    tagged_tuple<tag::in1(I1), tag::in2(I2), tag::out(O)>
        transform(I1 first1, S1 last1, I2 first2, S2 last2, O result,
            F binary_op, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputRange Rng1, InputRange Rng2, WeaklyIncrementable O, class F,
        class Proj1 = identity, class Proj2 = identity>
    requires Writable<O, indirect_result_of_t<F&(
        projected<iterator_t<Rng1>, Proj1>, projected<iterator_t<Rng2>, Proj2>>>>()
    tagged_tuple<tag::in1(safe_iterator_t<Rng1>),
        tag::in2(safe_iterator_t<Rng2>),
        tag::out(O)>
        transform(Rng1&& rng1, Rng2&& rng2, O result,
            F binary_op, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <ForwardIterator I, Sentinel<I> S, class T1, class T2, class Proj = identity>
    requires Writable<I, const T2&>() &&
        IndirectRelation<equal_to<>, projected<I, Proj>, const T1*>()
    I
        replace(I first, S last, const T1& old_value, const T2& new_value, Proj proj = Proj{});

template <ForwardRange Rng, class T1, class T2, class Proj = identity>
    requires Writable<iterator_t<Rng>, const T2&>() &&
        IndirectRelation<equal_to<>, projected<iterator_t<Rng>, Proj>, const T1*>()
    safe_iterator_t<Rng>
        replace(Rng&& rng, const T1& old_value, const T2& new_value, Proj proj = Proj{});

template <ForwardIterator I, Sentinel<I> S, class T, class Proj = identity,
        IndirectPredicate<projected<I, Proj>> Pred>
    requires Writable<I, const T&>()
    I
        replace_if(I first, S last, Pred pred, const T& new_value, Proj proj = Proj{});

template <ForwardRange Rng, class T, class Proj = identity,
        IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
    requires Writable<iterator_t<Rng>, const T&>()
    safe_iterator_t<Rng>
        replace_if(Rng&& rng, Pred pred, const T& new_value, Proj proj = Proj{});

template <InputIterator I, Sentinel<I> S, class T1, class T2, OutputIterator<const T2&> O,
        class Proj = identity>

```

```

requires IndirectlyCopyable<I, O>() &&
    IndirectRelation<equal_to<>, projected<I, Proj>, const T1*>()
tagged_pair<tag::in(I), tag::out(O)>
    replace_copy(I first, S last, O result, const T1& old_value, const T2& new_value,
        Proj proj = Proj{});

template <InputRange Rng, class T1, class T2, OutputIterator<const T2&> O,
    class Proj = identity>
requires IndirectlyCopyable<iterator_t<Rng>, O>() &&
    IndirectRelation<equal_to<>, projected<iterator_t<Rng>, Proj>, const T1*>()
tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(O)>
    replace_copy(Rng&& rng, O result, const T1& old_value, const T2& new_value,
        Proj proj = Proj{});

template <InputIterator I, Sentinel<I> S, class T, OutputIterator<const T&> O,
    class Proj = identity, IndirectPredicate<projected<I, Proj>> Pred>
requires IndirectlyCopyable<I, O>()
tagged_pair<tag::in(I), tag::out(O)>
    replace_copy_if(I first, S last, O result, Pred pred, const T& new_value,
        Proj proj = Proj{});

template <InputRange Rng, class T, OutputIterator<const T&> O, class Proj = identity,
    IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
requires IndirectlyCopyable<iterator_t<Rng>, O>()
tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(O)>
    replace_copy_if(Rng&& rng, O result, Pred pred, const T& new_value,
        Proj proj = Proj{});

template <class T, OutputIterator<const T&> O, Sentinel<O> S>
    O fill(O first, S last, const T& value);

template <class T, OutputRange<const T&> Rng>
    safe_iterator_t<Rng>
        fill(Rng&& rng, const T& value);

template <class T, OutputIterator<const T&> O>
    O fill_n(O first, difference_type_t<O> n, const T& value);

template <Invocable F, OutputIterator<result_of_t<F&&()>> O,
    Sentinel<O> S>
    O generate(O first, S last, F gen);

template <Invocable F, OutputRange<result_of_t<F&&()>> Rng>
    safe_iterator_t<Rng>
        generate(Rng&& rng, F gen);

template <Invocable F, OutputIterator<result_of_t<F&&()>> O>
    O generate_n(O first, difference_type_t<O> n, F gen);

template <ForwardIterator I, Sentinel<I> S, class T, class Proj = identity>
requires Permutable<I>() &&
    IndirectRelation<equal_to<>, projected<I, Proj>, const T*>()
    I remove(I first, S last, const T& value, Proj proj = Proj{});

template <ForwardRange Rng, class T, class Proj = identity>

```

```

requires Permutable<iterator_t<Rng>>() &&
    IndirectRelation<equal_to<>, projected<iterator_t<Rng>, Proj>, const T*>()
safe_iterator_t<Rng>
    remove(Rng&& rng, const T& value, Proj proj = Proj{});

template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
    IndirectPredicate<projected<I, Proj>> Pred>
requires Permutable<I>()
I remove_if(I first, S last, Pred pred, Proj proj = Proj{});

template <ForwardRange Rng, class Proj = identity,
    IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
requires Permutable<iterator_t<Rng>>()
safe_iterator_t<Rng>
    remove_if(Rng&& rng, Pred pred, Proj proj = Proj{});

template <InputIterator I, Sentinel<I> S, WeaklyIncrementable O, class T,
    class Proj = identity>
requires IndirectlyCopyable<I, O>() &&
    IndirectRelation<equal_to<>, projected<I, Proj>, const T*>()
tagged_pair<tag::in(I), tag::out(O)>
    remove_copy(I first, S last, O result, const T& value, Proj proj = Proj{});

template <InputRange Rng, WeaklyIncrementable O, class T, class Proj = identity>
requires IndirectlyCopyable<iterator_t<Rng>, O>() &&
    IndirectRelation<equal_to<>, projected<iterator_t<Rng>, Proj>, const T*>()
tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(O)>
    remove_copy(Rng&& rng, O result, const T& value, Proj proj = Proj{});

template <InputIterator I, Sentinel<I> S, WeaklyIncrementable O,
    class Proj = identity, IndirectPredicate<projected<I, Proj>> Pred>
requires IndirectlyCopyable<I, O>()
tagged_pair<tag::in(I), tag::out(O)>
    remove_copy_if(I first, S last, O result, Pred pred, Proj proj = Proj{});

template <InputRange Rng, WeaklyIncrementable O, class Proj = identity,
    IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
requires IndirectlyCopyable<iterator_t<Rng>, O>()
tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(O)>
    remove_copy_if(Rng&& rng, O result, Pred pred, Proj proj = Proj{});

template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
    IndirectRelation<projected<I, Proj>> R = equal_to<>>
requires Permutable<I>()
I unique(I first, S last, R comp = R{}, Proj proj = Proj{});

template <ForwardRange Rng, class Proj = identity,
    IndirectRelation<projected<iterator_t<Rng>, Proj>> R = equal_to<>>
requires Permutable<iterator_t<Rng>>()
safe_iterator_t<Rng>
    unique(Rng&& rng, R comp = R{}, Proj proj = Proj{});

template <InputIterator I, Sentinel<I> S, WeaklyIncrementable O,
    class Proj = identity, IndirectRelation<projected<I, Proj>> R = equal_to<>>
requires IndirectlyCopyable<I, O>() && (ForwardIterator<I>() ||

```

```

    ForwardIterator<O>() || IndirectlyCopyableStorable<I, O>())
    tagged_pair<tag::in(I), tag::out(O)>
    unique_copy(I first, S last, O result, R comp = R{}, Proj proj = Proj{});

template <InputRange Rng, WeaklyIncrementable O, class Proj = identity,
    IndirectRelation<projected<iterator_t<Rng>, Proj>> R = equal_to<>>
    requires IndirectlyCopyable<iterator_t<Rng>, O>() &&
    (ForwardIterator<iterator_t<Rng>>() || ForwardIterator<O>() ||
    IndirectlyCopyableStorable<iterator_t<Rng>, O>())
    tagged_pair<tag::in(unsafe_iterator_t<Rng>), tag::out(O)>
    unique_copy(Rng&& rng, O result, R comp = R{}, Proj proj = Proj{});

template <BidirectionalIterator I, Sentinel<I> S>
    requires Permutable<I>()
    I reverse(I first, S last);

template <BidirectionalRange Rng>
    requires Permutable<iterator_t<Rng>>()
    safe_iterator_t<Rng>
    reverse(Rng&& rng);

template <BidirectionalIterator I, Sentinel<I> S, WeaklyIncrementable O>
    requires IndirectlyCopyable<I, O>()
    tagged_pair<tag::in(I), tag::out(O)> reverse_copy(I first, S last, O result);

template <BidirectionalRange Rng, WeaklyIncrementable O>
    requires IndirectlyCopyable<iterator_t<Rng>, O>()
    tagged_pair<tag::in(unsafe_iterator_t<Rng>), tag::out(O)>
    reverse_copy(Rng&& rng, O result);

template <ForwardIterator I, Sentinel<I> S>
    requires Permutable<I>()
    tagged_pair<tag::begin(I), tag::end(I)>
    rotate(I first, I middle, S last);

template <ForwardRange Rng>
    requires Permutable<iterator_t<Rng>>()
    tagged_pair<tag::begin(unsafe_iterator_t<Rng>),
        tag::end(unsafe_iterator_t<Rng>>>
    rotate(Rng&& rng, iterator_t<Rng> middle);

template <ForwardIterator I, Sentinel<I> S, WeaklyIncrementable O>
    requires IndirectlyCopyable<I, O>()
    tagged_pair<tag::in(I), tag::out(O)>
    rotate_copy(I first, I middle, S last, O result);

template <ForwardRange Rng, WeaklyIncrementable O>
    requires IndirectlyCopyable<iterator_t<Rng>, O>()
    tagged_pair<tag::in(unsafe_iterator_t<Rng>), tag::out(O)>
    rotate_copy(Rng&& rng, iterator_t<Rng> middle, O result);

// 7.4.12, shuffle:
template <RandomAccessIterator I, Sentinel<I> S, class Gen>
    requires Permutable<I>() &&
    UniformRandomNumberGenerator<remove_reference_t<Gen>>() &&

```



```

    ConvertibleTo<result_of_t<Gen&()>, difference_type_t<I>>()
    I shuffle(I first, S last, Gen&& g);

template <RandomAccessRange Rng, class Gen>
    requires Permutable<I>() &&
        UniformRandomNumberGenerator<remove_reference_t<Gen>>() &&
        ConvertibleTo<result_of_t<Gen&()>, difference_type_t<I>>()
    safe_iterator_t<Rng>
        shuffle(Rng&& rng, Gen&& g);

// 7.4.13, partitions:
template <InputIterator I, Sentinel<I> S, class Proj = identity,
    IndirectPredicate<projected<I, Proj>> Pred>
    bool is_partitioned(I first, S last, Pred pred, Proj proj = Proj{});

template <InputRange Rng, class Proj = identity,
    IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
    bool
        is_partitioned(Rng&& rng, Pred pred, Proj proj = Proj{});

template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
    IndirectPredicate<projected<I, Proj>> Pred>
    requires Permutable<I>()
    I partition(I first, S last, Pred pred, Proj proj = Proj{});

template <ForwardRange Rng, class Proj = identity,
    IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
    requires Permutable<iterator_t<Rng>>()
    safe_iterator_t<Rng>
        partition(Rng&& rng, Pred pred, Proj proj = Proj{});

template <BidirectionalIterator I, Sentinel<I> S, class Proj = identity,
    IndirectPredicate<projected<I, Proj>> Pred>
    requires Permutable<I>()
    I stable_partition(I first, S last, Pred pred, Proj proj = Proj{});

template <BidirectionalRange Rng, class Proj = identity,
    IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
    requires Permutable<iterator_t<Rng>>()
    safe_iterator_t<Rng>
        stable_partition(Rng&& rng, Pred pred, Proj proj = Proj{});

template <InputIterator I, Sentinel<I> S, WeaklyIncrementable O1, WeaklyIncrementable O2,
    class Proj = identity, IndirectPredicate<projected<I, Proj>> Pred>
    requires IndirectlyCopyable<I, O1>() && IndirectlyCopyable<I, O2>()
    tagged_tuple<tag::in(I), tag::out1(O1), tag::out2(O2)>
        partition_copy(I first, S last, O1 out_true, O2 out_false, Pred pred,
            Proj proj = Proj{});

template <InputRange Rng, WeaklyIncrementable O1, WeaklyIncrementable O2,
    class Proj = identity,
    IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
    requires IndirectlyCopyable<iterator_t<Rng>, O1>() &&
        IndirectlyCopyable<iterator_t<Rng>, O2>()
    tagged_tuple<tag::in(safe_iterator_t<Rng>), tag::out1(O1), tag::out2(O2)>

```

```

    partition_copy(Rng&& rng, O1 out_true, O2 out_false, Pred pred, Proj proj = Proj{});

template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
        IndirectPredicate<projected<I, Proj>> Pred>
    I partition_point(I first, S last, Pred pred, Proj proj = Proj{});

template <ForwardRange Rng, class Proj = identity,
        IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
    safe_iterator_t<Rng>
    partition_point(Rng&& rng, Pred pred, Proj proj = Proj{});

// 7.5, sorting and related operations:
// 7.5.1, sorting:
template <RandomAccessIterator I, Sentinel<I> S, class Comp = less<>,
        class Proj = identity>
    requires Sortable<I, Comp, Proj>()
    I sort(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessRange Rng, class Comp = less<>, class Proj = identity>
    requires Sortable<iterator_t<Rng>, Comp, Proj>()
    safe_iterator_t<Rng>
    sort(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessIterator I, Sentinel<I> S, class Comp = less<>,
        class Proj = identity>
    requires Sortable<I, Comp, Proj>()
    I stable_sort(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessRange Rng, class Comp = less<>, class Proj = identity>
    requires Sortable<iterator_t<Rng>, Comp, Proj>()
    safe_iterator_t<Rng>
    stable_sort(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessIterator I, Sentinel<I> S, class Comp = less<>,
        class Proj = identity>
    requires Sortable<I, Comp, Proj>()
    I partial_sort(I first, I middle, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessRange Rng, class Comp = less<>, class Proj = identity>
    requires Sortable<iterator_t<Rng>, Comp, Proj>()
    safe_iterator_t<Rng>
    partial_sort(Rng&& rng, iterator_t<Rng> middle, Comp comp = Comp{},
                Proj proj = Proj{});

template <InputIterator I1, Sentinel<I1> S1, RandomAccessIterator I2, Sentinel<I2> S2,
        class Comp = less<>, class Proj1 = identity, class Proj2 = identity>
    requires IndirectlyCopyable<I1, I2>() && Sortable<I2, Comp, Proj2>() &&
        IndirectStrictWeakOrder<Comp, projected<I1, Proj1>, projected<I2, Proj2>>()
    I2
    partial_sort_copy(I1 first, S1 last, I2 result_first, S2 result_last,
                    Comp comp = Comp{}, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputRange Rng1, RandomAccessRange Rng2, class Comp = less<>,
        class Proj1 = identity, class Proj2 = identity>
    requires IndirectlyCopyable<iterator_t<Rng1>, iterator_t<Rng2>>() &&

```

```

    Sortable<iterator_t<Rng2>, Comp, Proj2>() &&
    IndirectStrictWeakOrder<Comp, projected<iterator_t<Rng1>, Proj1>,
    projected<iterator_t<Rng2>, Proj2>>()
safe_iterator_t<Rng2>
    partial_sort_copy(Rng1&& rng, Rng2&& result_rng, Comp comp = Comp{},
    Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
    IndirectStrictWeakOrder<projected<I, Proj>> Comp = less<>>
    bool is_sorted(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <ForwardRange Rng, class Proj = identity,
    IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj>> Comp = less<>>
    bool
    is_sorted(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});

template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
    IndirectStrictWeakOrder<projected<I, Proj>> Comp = less<>>
    I is_sorted_until(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <ForwardRange Rng, class Proj = identity,
    IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj>> Comp = less<>>
    safe_iterator_t<Rng>
    is_sorted_until(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessIterator I, Sentinel<I> S, class Comp = less<>,
    class Proj = identity>
    requires Sortable<I, Comp, Proj>()
    I nth_element(I first, I nth, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessRange Rng, class Comp = less<>, class Proj = identity>
    requires Sortable<iterator_t<Rng>, Comp, Proj>()
    safe_iterator_t<Rng>
    nth_element(Rng&& rng, iterator_t<Rng> nth, Comp comp = Comp{}, Proj proj = Proj{});

// 7.5.3, binary search:
template <ForwardIterator I, Sentinel<I> S, class T, class Proj = identity,
    IndirectStrictWeakOrder<const T*, projected<I, Proj>> Comp = less<>>
    I
    lower_bound(I first, S last, const T& value, Comp comp = Comp{},
    Proj proj = Proj{});

template <ForwardRange Rng, class T, class Proj = identity,
    IndirectStrictWeakOrder<const T*, projected<iterator_t<Rng>, Proj>> Comp = less<>>
    safe_iterator_t<Rng>
    lower_bound(Rng&& rng, const T& value, Comp comp = Comp{}, Proj proj = Proj{});

template <ForwardIterator I, Sentinel<I> S, class T, class Proj = identity,
    IndirectStrictWeakOrder<const T*, projected<I, Proj>> Comp = less<>>
    I
    upper_bound(I first, S last, const T& value, Comp comp = Comp{}, Proj proj = Proj{});

template <ForwardRange Rng, class T, class Proj = identity,
    IndirectStrictWeakOrder<const T*, projected<iterator_t<Rng>, Proj>> Comp = less<>>
    safe_iterator_t<Rng>

```

```

    upper_bound(Rng&& rng, const T& value, Comp comp = Comp{}, Proj proj = Proj{});

template <ForwardIterator I, Sentinel<I> S, class T, class Proj = identity,
    IndirectStrictWeakOrder<const T*, projected<I, Proj>> Comp = less<>>
    tagged_pair<tag::begin(I), tag::end(I)>
    equal_range(I first, S last, const T& value, Comp comp = Comp{}, Proj proj = Proj{});

template <ForwardRange Rng, class T, class Proj = identity,
    IndirectStrictWeakOrder<const T*, projected<iterator_t<Rng>, Proj>> Comp = less<>>
    tagged_pair<tag::begin_t<Rng>,
        tag::end_t<Rng>>
    equal_range(Rng&& rng, const T& value, Comp comp = Comp{}, Proj proj = Proj{});

template <ForwardIterator I, Sentinel<I> S, class T, class Proj = identity,
    IndirectStrictWeakOrder<const T*, projected<I, Proj>> Comp = less<>>
    bool
    binary_search(I first, S last, const T& value, Comp comp = Comp{},
        Proj proj = Proj{});

template <ForwardRange Rng, class T, class Proj = identity,
    IndirectStrictWeakOrder<const T*, projected<iterator_t<Rng>, Proj>> Comp = less<>>
    bool
    binary_search(Rng&& rng, const T& value, Comp comp = Comp{},
        Proj proj = Proj{});

// 7.5.4, merge:
template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
    WeaklyIncrementable O, class Comp = less<>, class Proj1 = identity,
    class Proj2 = identity>
    requires Mergeable<I1, I2, O, Comp, Proj1, Proj2>()
    tagged_tuple<tag::in1(I1), tag::in2(I2), tag::out(O)>
    merge(I1 first1, S1 last1, I2 first2, S2 last2, O result,
        Comp comp = Comp{}, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputRange Rng1, InputRange Rng2, WeaklyIncrementable O, class Comp = less<>,
    class Proj1 = identity, class Proj2 = identity>
    requires Mergeable<iterator_t<Rng1>, iterator_t<Rng2>, O, Comp, Proj1, Proj2>()
    tagged_tuple<tag::in1<safe_iterator_t<Rng1>>,
        tag::in2<safe_iterator_t<Rng2>>,
        tag::out(O)>
    merge(Rng1&& rng1, Rng2&& rng2, O result,
        Comp comp = Comp{}, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <BidirectionalIterator I, Sentinel<I> S, class Comp = less<>,
    class Proj = identity>
    requires Sortable<I, Comp, Proj>()
    I
    inplace_merge(I first, I middle, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <BidirectionalRange Rng, class Comp = less<>, class Proj = identity>
    requires Sortable<iterator_t<Rng>, Comp, Proj>()
    safe_iterator_t<Rng>
    inplace_merge(Rng&& rng, iterator_t<Rng> middle, Comp comp = Comp{},
        Proj proj = Proj{});

```

```

// 7.5.5, set operations:
template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
    class Proj1 = identity, class Proj2 = identity,
    IndirectStrictWeakOrder<projected<I1, Proj1>, projected<I2, Proj2>> Comp = less<>>
    bool
    includes(I1 first1, S1 last1, I2 first2, S2 last2, Comp comp = Comp{},
        Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputRange Rng1, InputRange Rng2, class Proj1 = identity,
    class Proj2 = identity,
    IndirectStrictWeakOrder<projected<iterator_t<Rng1>, Proj1>,
    projected<iterator_t<Rng2>, Proj2>> Comp = less<>>
    bool
    includes(Rng1&& rng1, Rng2&& rng2, Comp comp = Comp{},
        Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
    WeaklyIncrementable 0, class Comp = less<>, class Proj1 = identity, class Proj2 = identity>
    requires Mergeable<I1, I2, 0, Comp, Proj1, Proj2>()
    tagged_tuple<tag::in1(I1), tag::in2(I2), tag::out(0)>
    set_union(I1 first1, S1 last1, I2 first2, S2 last2, 0 result, Comp comp = Comp{},
        Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputRange Rng1, InputRange Rng2, WeaklyIncrementable 0,
    class Comp = less<>, class Proj1 = identity, class Proj2 = identity>
    requires Mergeable<iterator_t<Rng1>, iterator_t<Rng2>, 0, Comp, Proj1, Proj2>()
    tagged_tuple<tag::in1(safe_iterator_t<Rng1>),
        tag::in2(safe_iterator_t<Rng2>),
        tag::out(0)>
    set_union(Rng1&& rng1, Rng2&& rng2, 0 result, Comp comp = Comp{},
        Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
    WeaklyIncrementable 0, class Comp = less<>, class Proj1 = identity, class Proj2 = identity>
    requires Mergeable<I1, I2, 0, Comp, Proj1, Proj2>()
    0
    set_intersection(I1 first1, S1 last1, I2 first2, S2 last2, 0 result,
        Comp comp = Comp{}, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputRange Rng1, InputRange Rng2, WeaklyIncrementable 0,
    class Comp = less<>, class Proj1 = identity, class Proj2 = identity>
    requires Mergeable<iterator_t<Rng1>, iterator_t<Rng2>, 0, Comp, Proj1, Proj2>()
    0
    set_intersection(Rng1&& rng1, Rng2&& rng2, 0 result,
        Comp comp = Comp{}, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
    WeaklyIncrementable 0, class Comp = less<>, class Proj1 = identity, class Proj2 = identity>
    requires Mergeable<I1, I2, 0, Comp, Proj1, Proj2>()
    tagged_pair<tag::in1(I1), tag::out(0)>
    set_difference(I1 first1, S1 last1, I2 first2, S2 last2, 0 result,
        Comp comp = Comp{}, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputRange Rng1, InputRange Rng2, WeaklyIncrementable 0,
    class Comp = less<>, class Proj1 = identity, class Proj2 = identity>

```

```

requires Mergeable<iterator_t<Rng1>, iterator_t<Rng2>, 0, Comp, Proj1, Proj2>()
tagged_pair<tag::in1(safe_iterator_t<Rng1>), tag::out(0)>
    set_difference(Rng1&& rng1, Rng2&& rng2, 0 result,
                  Comp comp = Comp{}, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
         WeaklyIncrementable 0, class Comp = less<>, class Proj1 = identity, class Proj2 = identity>
requires Mergeable<I1, I2, 0, Comp, Proj1, Proj2>()
tagged_tuple<tag::in1(I1), tag::in2(I2), tag::out(0)>
    set_symmetric_difference(I1 first1, S1 last1, I2 first2, S2 last2, 0 result,
                             Comp comp = Comp{}, Proj1 proj1 = Proj1{},
                             Proj2 proj2 = Proj2{});

template <InputRange Rng1, InputRange Rng2, WeaklyIncrementable 0,
         class Comp = less<>, class Proj1 = identity, class Proj2 = identity>
requires Mergeable<iterator_t<Rng1>, iterator_t<Rng2>, 0, Comp, Proj1, Proj2>()
tagged_tuple<tag::in1(safe_iterator_t<Rng1>),
             tag::in2(safe_iterator_t<Rng2>),
             tag::out(0)>
    set_symmetric_difference(Rng1&& rng1, Rng2&& rng2, 0 result, Comp comp = Comp{},
                             Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

// 7.5.6, heap operations:
template <RandomAccessIterator I, Sentinel<I> S, class Comp = less<>,
         class Proj = identity>
requires Sortable<I, Comp, Proj>()
I push_heap(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessRange Rng, class Comp = less<>, class Proj = identity>
requires Sortable<iterator_t<Rng>, Comp, Proj>()
safe_iterator_t<Rng>
    push_heap(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessIterator I, Sentinel<I> S, class Comp = less<>,
         class Proj = identity>
requires Sortable<I, Comp, Proj>()
I pop_heap(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessRange Rng, class Comp = less<>, class Proj = identity>
requires Sortable<iterator_t<Rng>, Comp, Proj>()
safe_iterator_t<Rng>
    pop_heap(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessIterator I, Sentinel<I> S, class Comp = less<>,
         class Proj = identity>
requires Sortable<I, Comp, Proj>()
I make_heap(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessRange Rng, class Comp = less<>, class Proj = identity>
requires Sortable<iterator_t<Rng>, Comp, Proj>()
safe_iterator_t<Rng>
    make_heap(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessIterator I, Sentinel<I> S, class Comp = less<>,
         class Proj = identity>

```

```

requires Sortable<I, Comp, Proj>()
I sort_heap(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessRange Rng, class Comp = less<>, class Proj = identity>
requires Sortable<iterator_t<Rng>, Comp, Proj>()
safe_iterator_t<Rng>
sort_heap(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessIterator I, Sentinel<I> S, class Proj = identity,
IndirectStrictWeakOrder<projected<I, Proj>> Comp = less<>>
bool is_heap(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessRange Rng, class Proj = identity,
IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj>> Comp = less<>>
bool
is_heap(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessIterator I, Sentinel<I> S, class Proj = identity,
IndirectStrictWeakOrder<projected<I, Proj>> Comp = less<>>
I is_heap_until(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessRange Rng, class Proj = identity,
IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj>> Comp = less<>>
safe_iterator_t<Rng>
is_heap_until(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});

// 7.5.7, minimum and maximum:
template <class T, class Proj = identity,
IndirectStrictWeakOrder<projected<const T*, Proj>> Comp = less<>>
constexpr const T& min(const T& a, const T& b, Comp comp = Comp{}, Proj proj = Proj{});

template <Copyable T, class Proj = identity,
IndirectStrictWeakOrder<projected<const T*, Proj>> Comp = less<>>
constexpr T min(initializer_list<T> t, Comp comp = Comp{}, Proj proj = Proj{});

template <InputRange Rng, class Proj = identity,
IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj>> Comp = less<>>
requires Copyable<value_type_t<iterator_t<Rng>>>()
value_type_t<iterator_t<Rng>>
min(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});

template <class T, class Proj = identity,
IndirectStrictWeakOrder<projected<const T*, Proj>> Comp = less<>>
constexpr const T& max(const T& a, const T& b, Comp comp = Comp{}, Proj proj = Proj{});

template <Copyable T, class Proj = identity,
IndirectStrictWeakOrder<projected<const T*, Proj>> Comp = less<>>
constexpr T max(initializer_list<T> t, Comp comp = Comp{}, Proj proj = Proj{});

template <InputRange Rng, class Proj = identity,
IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj>> Comp = less<>>
requires Copyable<value_type_t<iterator_t<Rng>>>()
value_type_t<iterator_t<Rng>>
max(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});

```

```

template <class T, class Proj = identity,
    IndirectStrictWeakOrder<projected<const T*, Proj>> Comp = less<>>
    constexpr tagged_pair<tag::min(const T&), tag::max(const T&)>
    minmax(const T& a, const T& b, Comp comp = Comp{}, Proj proj = Proj{});

template <Copyable T, class Proj = identity,
    IndirectStrictWeakOrder<projected<const T*, Proj>> Comp = less<>>
    constexpr tagged_pair<tag::min(T), tag::max(T)>
    minmax(initializer_list<T> t, Comp comp = Comp{}, Proj proj = Proj{});

template <InputRange Rng, class Proj = identity,
    IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj> Comp = less<>>
    requires Copyable<value_type_t<iterator_t<Rng>>>()
    tagged_pair<tag::min(value_type_t<iterator_t<Rng>>),
        tag::max(value_type_t<iterator_t<Rng>>)>
    minmax(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});

template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
    IndirectStrictWeakOrder<projected<I, Proj>> Comp = less<>>
    I min_element(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <ForwardRange Rng, class Proj = identity,
    IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj>> Comp = less<>>
    safe_iterator_t<Rng>
    min_element(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});

template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
    IndirectStrictWeakOrder<projected<I, Proj>> Comp = less<>>
    I max_element(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <ForwardRange Rng, class Proj = identity,
    IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj>> Comp = less<>>
    safe_iterator_t<Rng>
    max_element(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});

template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
    IndirectStrictWeakOrder<projected<I, Proj>> Comp = less<>>
    tagged_pair<tag::min(I), tag::max(I)>
    minmax_element(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <ForwardRange Rng, class Proj = identity,
    IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj>> Comp = less<>>
    tagged_pair<tag::min(safe_iterator_t<Rng>),
        tag::max(safe_iterator_t<Rng>)>
    minmax_element(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});

template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
    class Proj1 = identity, class Proj2 = identity,
    IndirectStrictWeakOrder<projected<I1, Proj1>, projected<I2, Proj2>> Comp = less<>>
    bool
    lexicographical_compare(I1 first1, S1 last1, I2 first2, S2 last2,
        Comp comp = Comp{}, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputRange Rng1, InputRange Rng2, class Proj1 = identity,
    class Proj2 = identity,

```



```

    IndirectStrictWeakOrder<projected<iterator_t<Rng1>, Proj1>,
        projected<iterator_t<Rng2>, Proj2>> Comp = less<>>
    bool
        lexicographical_compare(Rng1&& rng1, Rng2&& rng2, Comp comp = Comp{},
            Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

// 7.5.9, permutations:
template <BidirectionalIterator I, Sentinel<I> S, class Comp = less<>,
    class Proj = identity>
    requires Sortable<I, Comp, Proj>()
    bool next_permutation(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <BidirectionalRange Rng, class Comp = less<>,
    class Proj = identity>
    requires Sortable<iterator_t<Rng>, Comp, Proj>()
    bool
        next_permutation(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});

template <BidirectionalIterator I, Sentinel<I> S, class Comp = less<>,
    class Proj = identity>
    requires Sortable<I, Comp, Proj>()
    bool prev_permutation(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <BidirectionalRange Rng, class Comp = less<>,
    class Proj = identity>
    requires Sortable<iterator_t<Rng>, Comp, Proj>()
    bool
        prev_permutation(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});
}}}}

```

- <sup>3</sup> All of the algorithms are separated from the particular implementations of data structures and are parameterized by iterator types. Because of this, they can work with program-defined data structures, as long as these data structures have iterator types satisfying the assumptions on the algorithms.
- <sup>4</sup> For purposes of determining the existence of data races, algorithms shall not modify objects referenced through an iterator argument unless the specification requires such modification.
- <sup>5</sup> Both in-place and copying versions are provided for certain algorithms.<sup>4</sup> When such a version is provided for *algorithm* it is called *algorithm\_copy*. Algorithms that take predicates end with the suffix `_if` (which follows the suffix `_copy`).
- <sup>6</sup> [*Note*: Unless otherwise specified, algorithms that take function objects as arguments are permitted to copy those function objects freely. Programmers for whom object identity is important should consider using a wrapper class that points to a noncopied implementation object such as `reference_wrapper<T>` (ISO/IEC 14882:2014 §20.9.3), or some equivalent solution. — *end note*]
- <sup>7</sup> In the description of the algorithms operators `+` and `-` are used for some of the iterator categories for which they do not have to be defined. In these cases the semantics of `a+n` is the same as that of

```

X tmp = a;
advance(tmp, n);
return tmp;

```

and that of `b-a` is the same as of

---

<sup>4</sup> The decision whether to include a copying version was usually based on complexity considerations. When the cost of doing the operation dominates the cost of copy, the copying version is not included. For example, `sort_copy` is not included because the cost of sorting is much more significant, and users might as well do `copy` followed by `sort`.

```
return distance(a, b);
```

- <sup>8</sup> In the description of algorithm return values, sentinel values are sometimes returned where an iterator is expected. In these cases, the semantics are as if the sentinel is converted into an iterator as follows:

```
I tmp = first;
while(tmp != last)
    ++tmp;
return tmp;
```

- <sup>9</sup> Overloads of algorithms that take **Range** arguments (6.9.2.2) behave as if they are implemented by calling **begin** and **end** on the **Range** and dispatching to the overload that takes separate iterator and sentinel arguments.
- <sup>10</sup> Some algorithms declare both an overload that takes a **Range** and an **Iterator**, and an overload that takes two **Range** parameters. Since an array type (ISO/IEC 14882:2014 §3.9.2) both satisfies **Range** and decays to a pointer (ISO/IEC 14882:2014 §4.2) which satisfies **Iterator**, such overloads are ambiguous when an array is passed as the second argument. Implementations provide a mechanism to resolve this ambiguity in favor of the overload that takes two ranges.
- <sup>11</sup> The number and order of template parameters for algorithm declarations is unspecified, except where explicitly stated otherwise.
- <sup>12</sup> Despite that the algorithm declarations nominally accept parameters by value, it is unspecified when and if the argument expressions are used to initialize the actual parameters except that any such initialization shall be sequenced before (ISO/IEC 14882:2014 §1.9) the algorithm returns. [*Note: The behavior of a program that modifies the values of the actual argument expressions is consequently undefined unless the algorithm return happens before (ISO/IEC 14882:2014 §1.10) any such modifications. — end note*]

## 7.2 Tag specifiers

[alg.tagspec]

```
namespace tag {
    struct in { /* implementation-defined */ };
    struct in1 { /* implementation-defined */ };
    struct in2 { /* implementation-defined */ };
    struct out { /* implementation-defined */ };
    struct out1 { /* implementation-defined */ };
    struct out2 { /* implementation-defined */ };
    struct fun { /* implementation-defined */ };
    struct min { /* implementation-defined */ };
    struct max { /* implementation-defined */ };
    struct begin { /* implementation-defined */ };
    struct end { /* implementation-defined */ };
}
```

- <sup>1</sup> In the following description, let  $X$  be the name of a type in the **tag** namespace above.
- <sup>2</sup> **tag::X** is a tag specifier (5.5.2) such that **TAGGET**( $D$ , **tag::X**,  $N$ ) names a tagged getter (5.5.2) with DerivedCharacteristic  $D$ , ElementIndex  $N$ , and ElementName  $X$ .
- <sup>3</sup> [*Example: tag::in is a type such that TAGGET*( $D$ , **tag::in**,  $N$ ) names a type with the following interface:

```
struct __input_getter {
    constexpr decltype(auto) in() & { return get<N>(static_cast<D&>(*this)); }
    constexpr decltype(auto) in() && { return get<N>(static_cast<D&&>(*this)); }
    constexpr decltype(auto) in() const & { return get<N>(static_cast<const D&>(*this)); }
};
```

— end example]

### 7.3 Non-modifying sequence operations

[alg.nonmodifying]

#### 7.3.1 All of

[alg.all\_of]

```
template <InputIterator I, Sentinel<I> S, class Proj = identity,
        IndirectPredicate<projected<I, Proj>> Pred>
    bool all_of(I first, S last, Pred pred, Proj proj = Proj{});
```

```
template <InputRange Rng, class Proj = identity,
        IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
    bool all_of(Rng&& rng, Pred pred, Proj proj = Proj{});
```

<sup>1</sup> *Returns:* true if [first,last) is empty or if invoke(pred, invoke(proj, \*i)) is true for every iterator i in the range [first,last), and false otherwise.

<sup>2</sup> *Complexity:* At most last - first applications of the predicate and last - first applications of the projection.

#### 7.3.2 Any of

[alg.any\_of]

```
template <InputIterator I, Sentinel<I> S, class Proj = identity,
        IndirectPredicate<projected<I, Proj>> Pred>
    bool any_of(I first, S last, Pred pred, Proj proj = Proj{});
```

```
template <InputRange Rng, class Proj = identity,
        IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
    bool any_of(Rng&& rng, Pred pred, Proj proj = Proj{});
```

<sup>1</sup> *Returns:* false if [first,last) is empty or if there is no iterator i in the range [first,last) such that invoke(pred, invoke(proj, \*i)) is true, and true otherwise.

<sup>2</sup> *Complexity:* At most last - first applications of the predicate and last - first applications of the projection.

#### 7.3.3 None of

[alg.none\_of]

```
template <InputIterator I, Sentinel<I> S, class Proj = identity,
        IndirectPredicate<projected<I, Proj>> Pred>
    bool none_of(I first, S last, Pred pred, Proj proj = Proj{});
```

```
template <InputRange Rng, class Proj = identity,
        IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
    bool none_of(Rng&& rng, Pred pred, Proj proj = Proj{});
```

<sup>1</sup> *Returns:* true if [first,last) is empty or if invoke(pred, invoke(proj, \*i)) is false for every iterator i in the range [first,last), and false otherwise.

<sup>2</sup> *Complexity:* At most last - first applications of the predicate and last - first applications of the projection.

#### 7.3.4 For each

[alg.foreach]

```
template <InputIterator I, Sentinel<I> S, class Proj = identity,
        IndirectInvocable<projected<I, Proj>> Fun>
    tagged_pair<tag::in(I), tag::fun(Fun)>
    for_each(I first, S last, Fun f, Proj proj = Proj{});
```

```
template <InputRange Rng, class Proj = identity,
    IndirectInvocable<projected<iterator_t<Rng>, Proj>> Fun>
    tagged_pair<tag::in<safe_iterator_t<Rng>>, tag::fun<Fun>>
    for_each(Rng&& rng, Fun f, Proj proj = Proj{});
```

- 1 *Effects:* Calls `invoke(f, invoke(proj, *i))` for every iterator `i` in the range `[first, last)`, starting from `first` and proceeding to `last - 1`. [*Note:* If the result of `invoke(proj, *i)` is a mutable reference, `f` may apply nonconstant functions. — *end note*]
- 2 *Returns:* `{last, std::move(f)}`.
- 3 *Complexity:* Applies `f` and `proj` exactly `last - first` times.
- 4 *Remarks:* If `f` returns a result, the result is ignored.

### 7.3.5 Find

[alg.find]

```
template <InputIterator I, Sentinel<I> S, class T, class Proj = identity>
    requires IndirectRelation<equal_to<>, projected<I, Proj>, const T*>()
    I find(I first, S last, const T& value, Proj proj = Proj{});
```

```
template <InputRange Rng, class T, class Proj = identity>
    requires IndirectRelation<equal_to<>, projected<iterator_t<Rng>, Proj>, const T*>()
    safe_iterator_t<Rng>
    find(Rng&& rng, const T& value, Proj proj = Proj{});
```

```
template <InputIterator I, Sentinel<I> S, class Proj = identity,
    IndirectPredicate<projected<I, Proj>> Pred>
    I find_if(I first, S last, Pred pred, Proj proj = Proj{});
```

```
template <InputRange Rng, class Proj = identity,
    IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
    safe_iterator_t<Rng>
    find_if(Rng&& rng, Pred pred, Proj proj = Proj{});
```

```
template <InputIterator I, Sentinel<I> S, class Proj = identity,
    IndirectPredicate<projected<I, Proj>> Pred>
    I find_if_not(I first, S last, Pred pred, Proj proj = Proj{});
```

```
template <InputRange Rng, class Proj = identity,
    IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
    safe_iterator_t<Rng>
    find_if_not(Rng&& rng, Pred pred, Proj proj = Proj{});
```

- 1 *Returns:* The first iterator `i` in the range `[first, last)` for which the following corresponding conditions hold: `invoke(proj, *i) == value, invoke(pred, invoke(proj, *i)) != false, invoke(pred, invoke(proj, *i)) == false`. Returns `last` if no such iterator is found.
- 2 *Complexity:* At most `last - first` applications of the corresponding predicate and projection.

### 7.3.6 Find end

[alg.find.end]

```
template <ForwardIterator I1, Sentinel<I1> S1, ForwardIterator I2,
    Sentinel<I2> S2, class Proj = identity,
    IndirectRelation<I2, projected<I1, Proj>> Pred = equal_to<>>
    I1
    find_end(I1 first1, S1 last1, I2 first2, S2 last2,
        Pred pred = Pred{}, Proj proj = Proj{});
```

```

template <ForwardRange Rng1, ForwardRange Rng2,
        class Proj = identity,
        IndirectRelation<iterator_t<Rng2>,
        projected<iterator_t<Rng>, Proj>> Pred = equal_to<>>
        safe_iterator_t<Rng1>
        find_end(Rng1&& rng1, Rng2&& rng2, Pred pred = Pred{}, Proj proj = Proj{});

```

- 1 *Effects:* Finds a subsequence of equal values in a sequence.
- 2 *Returns:* The last iterator *i* in the range  $[first1, last1 - (last2 - first2))$  such that for every non-negative integer  $n < (last2 - first2)$ , the following condition holds: `invoke(pred, invoke(proj, *(i + n)), *(first2 + n)) != false`. Returns `last1` if  $[first2, last2)$  is empty or if no such iterator is found.
- 3 *Complexity:* At most  $(last2 - first2) * (last1 - first1 - (last2 - first2) + 1)$  applications of the corresponding predicate and projection.

### 7.3.7 Find first of [alg.find.first.of]

```

template <InputIterator I1, Sentinel<I1> S1, ForwardIterator I2, Sentinel<I2> S2,
        class Proj1 = identity, class Proj2 = identity,
        IndirectPredicate<projected<I1, Proj1>, projected<I2, Proj2>> Pred = equal_to<>>
        I1
        find_first_of(I1 first1, S1 last1, I2 first2, S2 last2, Pred pred = Pred{},
        Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

```

```

template <InputRange Rng1, ForwardRange Rng2, class Proj1 = identity,
        class Proj2 = identity,
        IndirectPredicate<projected<iterator_t<Rng1>, Proj1>,
        projected<iterator_t<Rng2>, Proj2>> Pred = equal_to<>>
        safe_iterator_t<Rng1>
        find_first_of(Rng1&& rng1, Rng2&& rng2, Pred pred = Pred{},
        Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

```

- 1 *Effects:* Finds an element that matches one of a set of values.
- 2 *Returns:* The first iterator *i* in the range  $[first1, last1)$  such that for some iterator *j* in the range  $[first2, last2)$  the following condition holds: `invoke(pred, invoke(proj1, *i), invoke(proj2, *j)) != false`. Returns `last1` if  $[first2, last2)$  is empty or if no such iterator is found.
- 3 *Complexity:* At most  $(last1 - first1) * (last2 - first2)$  applications of the corresponding predicate and the two projections.

### 7.3.8 Adjacent find [alg.adjacent.find]

```

template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
        IndirectRelation<projected<I, Proj>> Pred = equal_to<>>
        I
        adjacent_find(I first, S last, Pred pred = Pred{},
        Proj proj = Proj{});

```

```

template <ForwardRange Rng, class Proj = identity,
        IndirectRelation<projected<iterator_t<Rng>, Proj>> Pred = equal_to<>>
        safe_iterator_t<Rng>
        adjacent_find(Rng&& rng, Pred pred = Pred{}, Proj proj = Proj{});

```

- 1 *Returns:* The first iterator *i* such that both *i* and *i + 1* are in the range  $[first, last)$  for which the following corresponding condition holds: `invoke(pred, invoke(proj, *i), invoke(proj, *(i + 1))) != false`. Returns `last` if no such iterator is found.

- <sup>2</sup> *Complexity:* For a nonempty range, exactly  $\min((i - \text{first}) + 1, (\text{last} - \text{first}) - 1)$  applications of the corresponding predicate, where  $i$  is `adjacent_find`'s return value, and no more than twice as many applications of the projection.

### 7.3.9 Count

[alg.count]

```
template <InputIterator I, Sentinel<I> S, class T, class Proj = identity>
    requires IndirectRelation<equal_to<>, projected<I, Proj>, const T*>()
    difference_type_t<I>
    count(I first, S last, const T& value, Proj proj = Proj{});

template <InputRange Rng, class T, class Proj = identity>
    requires IndirectRelation<equal_to<>, projected<iterator_t<Rng>, Proj>, const T*>()
    difference_type_t<iterator_t<Rng>>
    count(Rng&& rng, const T& value, Proj proj = Proj{});

template <InputIterator I, Sentinel<I> S, class Proj = identity,
    IndirectPredicate<projected<I, Proj>> Pred>
    difference_type_t<I>
    count_if(I first, S last, Pred pred, Proj proj = Proj{});

template <InputRange Rng, class Proj = identity,
    IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
    difference_type_t<iterator_t<Rng>>
    count_if(Rng&& rng, Pred pred, Proj proj = Proj{});
```

- <sup>1</sup> *Effects:* Returns the number of iterators  $i$  in the range `[first,last)` for which the following corresponding conditions hold: `invoke(proj, *i) == value`, `invoke(pred, invoke(proj, *i)) != false`.
- <sup>2</sup> *Complexity:* Exactly `last - first` applications of the corresponding predicate and projection.

### 7.3.10 Mismatch

[mismatch]

```
// A.2 (deprecated):
template <InputIterator I1, Sentinel<I1> S1, InputIterator I2,
    class Proj1 = identity, class Proj2 = identity,
    IndirectPredicate<projected<I1, Proj1>, projected<I2, Proj2>> Pred = equal_to<>>
    tagged_pair<tag::in1(I1), tag::in2(I2)>
    mismatch(I1 first1, S1 last1, I2 first2, Pred pred = Pred{}),
    Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

// A.2 (deprecated):
template <InputRange Rng1, InputIterator I2,
    class Proj1 = identity, class Proj2 = identity,
    IndirectPredicate<projected<iterator_t<Rng1>, Proj1>,
    projected<I2, Proj2>> Pred = equal_to<>>
    tagged_pair<tag::in1(safe_iterator_t<Rng1>), tag::in2(I2)>
    mismatch(Rng1&& rng1, I2 first2, Pred pred = Pred{}),
    Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
    class Proj1 = identity, class Proj2 = identity,
    IndirectPredicate<projected<I1, Proj1>, projected<I2, Proj2>> Pred = equal_to<>>
    tagged_pair<tag::in1(I1), tag::in2(I2)>
    mismatch(I1 first1, S1 last1, I2 first2, S2 last2, Pred pred = Pred{}),
    Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});
```

```

template <InputRange Rng1, InputRange Rng2,
         class Proj1 = identity, class Proj2 = identity,
         IndirectPredicate<projected<iterator_t<Rng1>, Proj1>,
         projected<iterator_t<Rng2>, Proj2>> Pred = equal_to<>>
tagged_pair<tag::in1(unsafe_iterator_t<Rng1>), tag::in2(unsafe_iterator_t<Rng2>>>
mismatch(Rng1&& rng1, Rng2&& rng2, Pred pred = Pred{}),
         Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

```

1 *Remarks:* If `last2` was not given in the argument list, it denotes `first2 + (last1 - first1)` below.

2 *Returns:* A pair of iterators `i` and `j` such that `j == first2 + (i - first1)` and `i` is the first iterator in the range `[first1, last1)` for which the following corresponding conditions hold:

(2.1) — `j` is in the range `[first2, last2)`.

(2.2) — `!(*i == *(first2 + (i - first1)))`

(2.3) — `invoke(pred, invoke(proj1, *i), invoke(proj2, *(first2 + (i - first1)))) == false`

Returns the pair `first1 + min(last1 - first1, last2 - first2)` and `first2 + min(last1 - first1, last2 - first2)` if such an iterator `i` is not found.

3 *Complexity:* At most `last1 - first1` applications of the corresponding predicate and both projections.

### 7.3.11 Equal

[alg.equal]

// A.2 (deprecated):

```

template <InputIterator I1, Sentinel<I1> S1, InputIterator I2,
         class Pred = equal_to<>, class Proj1 = identity, class Proj2 = identity>
requires IndirectlyComparable<I1, I2, Pred, Proj1, Proj2>()
bool equal(I1 first1, S1 last1,
          I2 first2, Pred pred = Pred{},
          Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

```

// A.2 (deprecated):

```

template <InputRange Rng1, InputIterator I2, class Pred = equal_to<>,
         class Proj1 = identity, class Proj2 = identity>
requires IndirectlyComparable<iterator_t<Rng1>, I2, Pred, Proj1, Proj2>()
bool equal(Rng1&& rng1, I2 first2, Pred pred = Pred{},
          Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

```

```

template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
         class Pred = equal_to<>, class Proj1 = identity, class Proj2 = identity>
requires IndirectlyComparable<I1, I2, Pred, Proj1, Proj2>()
bool equal(I1 first1, S1 last1, I2 first2, S2 last2,
          Pred pred = Pred{},
          Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

```

```

template <InputRange Rng1, InputRange Rng2, class Pred = equal_to<>,
         class Proj1 = identity, class Proj2 = identity>
requires IndirectlyComparable<iterator_t<Rng1>, iterator_t<Rng2>, Pred, Proj1, Proj2>()
bool equal(Rng1&& rng1, Rng2&& rng2, Pred pred = Pred{},
          Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

```

1 *Remarks:* If `last2` was not given in the argument list, it denotes `first2 + (last1 - first1)` below.

2 *Returns:* If `last1 - first1 != last2 - first2`, return `false`. Otherwise return `true` if for every iterator `i` in the range `[first1, last1)` the following condition holds: `invoke(pred, invoke(proj1, *i), invoke(proj2, *(first2 + (i - first1)))) != false`. Otherwise, returns `false`.

- 3 *Complexity:* No applications of the corresponding predicate and projections if `SizedSentinel<S1, I1>()` is satisfied, and `SizedSentinel<S2, I2>()` is satisfied, and `last1 - first1 != last2 - first2`. Otherwise, at most `min(last1 - first1, last2 - first2)` applications of the corresponding predicate and projections.

### 7.3.12 Is permutation

[alg.is\_permutation]

// A.2 (deprecated):

```
template <ForwardIterator I1, Sentinel<I1> S1, ForwardIterator I2,
         class Pred = equal_to<>, class Proj1 = identity, class Proj2 = identity>
requires IndirectlyComparable<I1, I2, Pred, Proj1, Proj2>()
bool is_permutation(I1 first1, S1 last1, I2 first2,
                   Pred pred = Pred{},
                   Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});
```

// A.2 (deprecated):

```
template <ForwardRange Rng1, ForwardIterator I2, class Pred = equal_to<>,
         class Proj1 = identity, class Proj2 = identity>
requires IndirectlyComparable<iterator_t<Rng1>, I2, Pred, Proj1, Proj2>()
bool is_permutation(Rng1&& rng1, I2 first2, Pred pred = Pred{},
                   Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});
```

```
template <ForwardIterator I1, Sentinel<I1> S1, ForwardIterator I2,
         Sentinel<I2> S2, class Pred = equal_to<>, class Proj1 = identity,
         class Proj2 = identity>
requires IndirectlyComparable<I1, I2, Pred, Proj1, Proj2>()
bool is_permutation(I1 first1, S1 last1, I2 first2, S2 last2,
                   Pred pred = Pred{},
                   Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});
```

```
template <ForwardRange Rng1, ForwardRange Rng2, class Pred = equal_to<>,
         class Proj1 = identity, class Proj2 = identity>
requires IndirectlyComparable<iterator_t<Rng1>, iterator_t<Rng2>, Pred, Proj1, Proj2>()
bool is_permutation(Rng1&& rng1, Rng2&& rng2, Pred pred = Pred{},
                   Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});
```

- 1 *Remarks:* If `last2` was not given in the argument list, it denotes `first2 + (last1 - first1)` below.
- 2 *Returns:* If `last1 - first1 != last2 - first2`, return `false`. Otherwise return `true` if there exists a permutation of the elements in the range `[first2, first2 + (last1 - first1))`, beginning with `I2` begin, such that `equal(first1, last1, begin, pred, proj1, proj2)` returns `true`; otherwise, returns `false`.
- 3 *Complexity:* No applications of the corresponding predicate and projections if `SizedSentinel<S1, I1>()` is satisfied, and `SizedSentinel<S2, I2>()` is satisfied, and `last1 - first1 != last2 - first2`. Otherwise, exactly `distance(first1, last1)` applications of the corresponding predicate and projections if `equal(first1, last1, first2, last2, pred, proj1, proj2)` would return `true`; otherwise, at worst  $\mathcal{O}(N^2)$ , where  $N$  has the value `distance(first1, last1)`.

### 7.3.13 Search

[alg.search]

```
template <ForwardIterator I1, Sentinel<I1> S1, ForwardIterator I2,
         Sentinel<I2> S2, class Pred = equal_to<>,
         class Proj1 = identity, class Proj2 = identity>
requires IndirectlyComparable<I1, I2, Pred, Proj1, Proj2>()
I1
search(I1 first1, S1 last1, I2 first2, S2 last2,
```



```

    Pred pred = Pred{},
    Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

```

```

template <ForwardRange Rng1, ForwardRange Rng2, class Pred = equal_to<>,
        class Proj1 = identity, class Proj2 = identity>
requires IndirectlyComparable<iterator_t<Rng1>, iterator_t<Rng2>, Pred, Proj1, Proj2>()
safe_iterator_t<Rng1>
search(Rng1&& rng1, Rng2&& rng2, Pred pred = Pred{},
       Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

```

- 1 *Effects:* Finds a subsequence of equal values in a sequence.
- 2 *Returns:* The first iterator *i* in the range  $[first1, last1 - (last2 - first2))$  such that for every non-negative integer *n* less than  $last2 - first2$  the following condition holds: `invoke(pred, invoke(proj1, *(i + n)), invoke(proj2, *(first2 + n))) != false`. Returns *first1* if  $[first2, last2)$  is empty, otherwise returns *last1* if no such iterator is found.
- 3 *Complexity:* At most  $(last1 - first1) * (last2 - first2)$  applications of the corresponding predicate and projections.

```

template <ForwardIterator I, Sentinel<I> S, class T,
        class Pred = equal_to<>, class Proj = identity>
requires IndirectlyComparable<I, const T*, Pred, Proj>()
I
search_n(I first, S last, difference_type_t<I> count,
        const T& value, Pred pred = Pred{},
        Proj proj = Proj{});

```

```

template <ForwardRange Rng, class T, class Pred = equal_to<>,
        class Proj = identity>
requires IndirectlyComparable<iterator_t<Rng>, const T*, Pred, Proj>()
safe_iterator_t<Rng>
search_n(Rng&& rng, difference_type_t<iterator_t<Rng>> count,
        const T& value, Pred pred = Pred{}, Proj proj = Proj{});

```

- 4 *Effects:* Finds a subsequence of equal values in a sequence.
- 5 *Returns:* The first iterator *i* in the range  $[first, last - count)$  such that for every non-negative integer *n* less than *count* the following condition holds: `invoke(pred, invoke(proj, *(i + n)), value) != false`. Returns *last* if no such iterator is found.
- 6 *Complexity:* At most  $last - first$  applications of the corresponding predicate and projection.

## 7.4 Mutating sequence operations

[alg.modifying.operations]

### 7.4.1 Copy

[alg.copy]

```

template <InputIterator I, Sentinel<I> S, WeaklyIncrementable O>
requires IndirectlyCopyable<I, O>()
tagged_pair<tag::in(I), tag::out(O)>
copy(I first, S last, O result);

```

```

template <InputRange Rng, WeaklyIncrementable O>
requires IndirectlyCopyable<iterator_t<Rng>, O>()
tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(O)>
copy(Rng&& rng, O result);

```

- 1 *Effects:* Copies elements in the range  $[first, last)$  into the range  $[result, result + (last - first))$  starting from *first* and proceeding to *last*. For each non-negative integer *n*  $< (last - first)$ , performs `*(result + n) = *(first + n)`.

- 2       *Returns:* {last, result + (last - first)}.
- 3       *Requires:* result shall not be in the range [first,last).
- 4       *Complexity:* Exactly last - first assignments.

```
template <InputIterator I, WeaklyIncrementable O>
  requires IndirectlyCopyable<I, O>()
  tagged_pair<tag::in(I), tag::out(O)>
    copy_n(I first, difference_type_t<I> n, O result);
```

- 5       *Effects:* For each non-negative integer  $i < n$ , performs  $*(result + i) = *(first + i)$ .
- 6       *Returns:* {first + n, result + n}.
- 7       *Complexity:* Exactly n assignments.

```
template <InputIterator I, Sentinel<I> S, WeaklyIncrementable O, class Proj = identity,
  IndirectPredicate<projected<I, Proj>> Pred>
  requires IndirectlyCopyable<I, O>()
  tagged_pair<tag::in(I), tag::out(O)>
    copy_if(I first, S last, O result, Pred pred, Proj proj = Proj{});
```

```
template <InputRange Rng, WeaklyIncrementable O, class Proj = identity,
  IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
  requires IndirectlyCopyable<iterator_t<Rng>, O>()
  tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(O)>
    copy_if(Rng&& rng, O result, Pred pred, Proj proj = Proj{});
```

- 8       *Requires:* The ranges [first,last) and [result,result + (last - first)) shall not overlap.
- 9       *Effects:* Copies all of the elements referred to by the iterator i in the range [first,last) for which invoke(pred, invoke(proj, \*i)) is true.
- 10      *Returns:* {last, result + (last - first)}.
- 11      *Complexity:* Exactly last - first applications of the corresponding predicate and projection.
- 12      *Remarks:* Stable (ISO/IEC 14882:2014 §17.6.5.7).

```
template <BidirectionalIterator I1, Sentinel<I1> S1, BidirectionalIterator I2>
  requires IndirectlyCopyable<I1, I2>()
  tagged_pair<tag::in(I1), tag::out(I2)>
    copy_backward(I1 first, S1 last, I2 result);
```

```
template <BidirectionalRange Rng, BidirectionalIterator I>
  requires IndirectlyCopyable<iterator_t<Rng>, I>()
  tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(I)>
    copy_backward(Rng&& rng, I result);
```

- 13      *Effects:* Copies elements in the range [first,last) into the range [result - (last-first),result) starting from last - 1 and proceeding to first.<sup>5</sup> For each positive integer  $n \leq (last - first)$ , performs  $*(result - n) = *(last - n)$ .
- 14      *Requires:* result shall not be in the range (first,last].
- 15      *Returns:* {last, result - (last - first)}.
- 16      *Complexity:* Exactly last - first assignments.

---

5) copy\_backward should be used instead of copy when last is in the range [result - (last - first),result).

## 7.4.2 Move

[alg.move]

```
template <InputIterator I, Sentinel<I> S, WeaklyIncrementable O>
requires IndirectlyMovable<I, O>()
tagged_pair<tag::in(I), tag::out(O)>
move(I first, S last, O result);
```

```
template <InputRange Rng, WeaklyIncrementable O>
requires IndirectlyMovable<iterator_t<Rng>, O>()
tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(O)>
move(Rng&& rng, O result);
```

1 *Effects:* Moves elements in the range [first,last) into the range [result,result + (last - first)) starting from first and proceeding to last. For each non-negative integer  $n < (last - first)$ , performs  $*(result + n) = std::move(*(first + n))$ .

2 *Returns:* {last, result + (last - first)}.

3 *Requires:* result shall not be in the range [first,last).

4 *Complexity:* Exactly last - first move assignments.

```
template <BidirectionalIterator I1, Sentinel<I1> S1, BidirectionalIterator I2>
requires IndirectlyMovable<I1, I2>()
tagged_pair<tag::in(I1), tag::out(I2)>
move_backward(I1 first, S1 last, I2 result);
```

```
template <BidirectionalRange Rng, BidirectionalIterator I>
requires IndirectlyMovable<iterator_t<Rng>, I>()
tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(I)>
move_backward(Rng&& rng, I result);
```

5 *Effects:* Moves elements in the range [first,last) into the range [result - (last - first),result) starting from last - 1 and proceeding to first.<sup>6</sup> For each positive integer  $n \leq (last - first)$ , performs  $*(result - n) = std::move(*(last - n))$ .

6 *Requires:* result shall not be in the range (first,last].

7 *Returns:* {last, result - (last - first)}.

8 *Complexity:* Exactly last - first assignments.

## 7.4.3 swap

[alg.swap]

// A.2 (deprecated):

```
template <ForwardIterator I1, Sentinel<I1> S1, ForwardIterator I2>
requires IndirectlySwappable<I1, I2>()
tagged_pair<tag::in1(I1), tag::in2(I2)>
swap_ranges(I1 first1, S1 last1, I2 first2);
```

// A.2 (deprecated):

```
template <ForwardRange Rng, ForwardIterator I>
requires IndirectlySwappable<iterator_t<Rng>, I>()
tagged_pair<tag::in1(safe_iterator_t<Rng>), tag::in2(I)>
swap_ranges(Rng&& rng1, I first2);
```

```
template <ForwardIterator I1, Sentinel<I1> S1, ForwardIterator I2, Sentinel<I2> S2>
requires IndirectlySwappable<I1, I2>()
```

---

6) move\_backward should be used instead of move when last is in the range [result - (last - first),result).

```

tagged_pair<tag::in1(I1), tag::in2(I2)>
  swap_ranges(I1 first1, S1 last1, I2 first2, S2 last2);

```

```

template <ForwardRange Rng1, ForwardRange Rng2>
  requires IndirectlySwappable<iterator_t<Rng1>, iterator_t<Rng2>>>()
  tagged_pair<tag::in1(unsafe_iterator_t<Rng1>), tag::in2(unsafe_iterator_t<Rng2>>>()
  swap_ranges(Rng1&& rng1, Rng2&& rng2);

```

- 1 *Effects:* For the first two overloads, let `last2` be `first2 + (last1 - first1)`. For each non-negative integer `n < min(last1 - first1, last2 - first2)` performs: `swap(*(first1 + n), *(first2 + n))`.
- 2 *Requires:* The two ranges `[first1,last1)` and `[first2,last2)` shall not overlap. `*(first1 + n)` shall be swappable with (4.2.11) `*(first2 + n)`.
- 3 *Returns:* `{first1 + n, first2 + n}`, where `n` is `min(last1 - first1, last2 - first2)`.
- 4 *Complexity:* Exactly `min(last1 - first1, last2 - first2)` swaps.

#### 7.4.4 Transform

[alg.transform]

```

template <InputIterator I, Sentinel<I> S, WeaklyIncrementable O, class F, class Proj = identity>
  requires Writable<O, indirect_result_of_t<F&(projected<I, Proj>>>>()
  tagged_pair<tag::in(I), tag::out(O)>
  transform(I first, S last, O result, F op, Proj proj = Proj{});

```

```

template <InputRange Rng, WeaklyIncrementable O, class F, class Proj = identity>
  requires Writable<O, indirect_result_of_t<F&(
  projected<iterator_t<R>, Proj>>>>()
  tagged_pair<tag::in(unsafe_iterator_t<Rng>), tag::out(O)>
  transform(Rng&& rng, O result, F op, Proj proj = Proj{});

```

// A.2 (deprecated):

```

template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, WeaklyIncrementable O,
  class F, class Proj1 = identity, class Proj2 = identity>
  requires Writable<O, indirect_result_of_t<F&(projected<I1, Proj1>,
  projected<I2, Proj2>>>>()
  tagged_tuple<tag::in1(I1), tag::in2(I2), tag::out(O)>
  transform(I1 first1, S1 last1, I2 first2, O result,
    F binary_op, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

```

// A.2 (deprecated):

```

template <InputRange Rng, InputIterator I, WeaklyIncrementable O, class F,
  class Proj1 = identity, class Proj2 = identity>
  requires Writable<O, indirect_result_of_t<F&(
  projected<iterator_t<Rng>, Proj1>, projected<I, Proj2>>>>()
  tagged_tuple<tag::in1(unsafe_iterator_t<Rng>), tag::in2(I), tag::out(O)>
  transform(Rng&& rng1, I first2, O result,
    F binary_op, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

```

```

template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
  WeaklyIncrementable O, class F, class Proj1 = identity, class Proj2 = identity>
  requires Writable<O, indirect_result_of_t<F&(projected<I1, Proj1>,
  projected<I2, Proj2>>>>()
  tagged_tuple<tag::in1(I1), tag::in2(I2), tag::out(O)>
  transform(I1 first1, S1 last1, I2 first2, S2 last2, O result,
    F binary_op, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

```

```

template <InputRange Rng1, InputRange Rng2, WeaklyIncrementable O, class F,
         class Proj1 = identity, class Proj2 = identity>
requires Writable<O, indirect_result_of_t<F&&(
    projected<iterator_t<Rng1>, Proj1>, projected<iterator_t<Rng2>, Proj2>>>>()
tagged_tuple<tag::in1(safe_iterator_t<Rng1>),
             tag::in2(safe_iterator_t<Rng2>),
             tag::out(O)>
transform(Rng1&& rng1, Rng2&& rng2, O result,
         F binary_op, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

```

- 1 For binary transforms that do not take last2, let last2 be first2 + (last1 - first1). Let  $N$  be (last1 - first1) for unary transforms, or min(last1 - first1, last2 - first2) for binary transforms.
- 2 *Effects:* Assigns through every iterator  $i$  in the range [result, result +  $N$ ) a new corresponding value equal to invoke(op, invoke(proj, \*(first1 + (i - result)))) or invoke(binary\_op, invoke(proj1, \*(first1 + (i - result))), invoke(proj2, \*(first2 + (i - result)))).
- 3 *Requires:* op and binary\_op shall not invalidate iterators or subranges, or modify elements in the ranges [first1, first1 +  $N$ ], [first2, first2 +  $N$ ], and [result, result +  $N$ ].<sup>7</sup>
- 4 *Returns:* {first1 +  $N$ , result +  $N$ } or make\_tagged\_tuple<tag::in1, tag::in2, tag::out>(first1 +  $N$ , first2 +  $N$ , result +  $N$ ).
- 5 *Complexity:* Exactly  $N$  applications of op or binary\_op.
- 6 *Remarks:* result may be equal to first1 in case of unary transform, or to first1 or first2 in case of binary transform.

### 7.4.5 Replace

[alg.replace]

```

template <ForwardIterator I, Sentinel<I> S, class T1, class T2, class Proj = identity>
requires Writable<I, const T2&>() &&
    IndirectRelation<equal_to<>, projected<I, Proj>, const T1*>()
I
replace(I first, S last, const T1& old_value, const T2& new_value, Proj proj = Proj{});

```

```

template <ForwardRange Rng, class T1, class T2, class Proj = identity>
requires Writable<iterator_t<Rng>, const T2&>() &&
    IndirectRelation<equal_to<>, projected<iterator_t<Rng>, Proj>, const T1*>()
safe_iterator_t<Rng>
replace(Rng&& rng, const T1& old_value, const T2& new_value, Proj proj = Proj{});

```

```

template <ForwardIterator I, Sentinel<I> S, class T, class Proj = identity,
        IndirectPredicate<projected<I, Proj>> Pred>
requires Writable<I, const T&>()
I
replace_if(I first, S last, Pred pred, const T& new_value, Proj proj = Proj{});

```

```

template <ForwardRange Rng, class T, class Proj = identity,
        IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
requires Writable<iterator_t<Rng>, const T&>()
safe_iterator_t<Rng>
replace_if(Rng&& rng, Pred pred, const T& new_value, Proj proj = Proj{});

```

7) The use of fully closed ranges is intentional.

- 1 *Effects:* Substitutes elements referred by the iterator `i` in the range `[first,last)` with `new_value`, when the following corresponding conditions hold: `invoke(proj, *i) == old_value`, `invoke(pred, invoke(proj, *i)) != false`.
- 2 *Returns:* `last`.
- 3 *Complexity:* Exactly `last - first` applications of the corresponding predicate and projection.

```
template <InputIterator I, Sentinel<I> S, class T1, class T2, OutputIterator<const T2&> O,
        class Proj = identity>
requires IndirectlyCopyable<I, O>() &&
        IndirectRelation<equal_to<>, projected<I, Proj>, const T1*>()
tagged_pair<tag::in(I), tag::out(O)>
        replace_copy(I first, S last, O result, const T1& old_value, const T2& new_value,
                    Proj proj = Proj{});
```

```
template <InputRange Rng, class T1, class T2, OutputIterator<const T2&> O,
        class Proj = identity>
requires IndirectlyCopyable<iterator_t<Rng>, O>() &&
        IndirectRelation<equal_to<>, projected<iterator_t<Rng>, Proj>, const T1*>()
tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(O)>
        replace_copy(Rng&& rng, O result, const T1& old_value, const T2& new_value,
                    Proj proj = Proj{});
```

```
template <InputIterator I, Sentinel<I> S, class T, OutputIterator<const T&> O,
        class Proj = identity, IndirectPredicate<projected<I, Proj>> Pred>
requires IndirectlyCopyable<I, O>()
tagged_pair<tag::in(I), tag::out(O)>
        replace_copy_if(I first, S last, O result, Pred pred, const T& new_value,
                    Proj proj = Proj{});
```

```
template <InputRange Rng, class T, OutputIterator<const T&> O, class Proj = identity,
        IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
requires IndirectlyCopyable<iterator_t<Rng>, O>()
tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(O)>
        replace_copy_if(Rng&& rng, O result, Pred pred, const T& new_value,
                    Proj proj = Proj{});
```

- 4 *Requires:* The ranges `[first,last)` and `[result,result + (last - first))` shall not overlap.
- 5 *Effects:* Assigns to every iterator `i` in the range `[result,result + (last - first))` either `new_value` or `*(first + (i - result))` depending on whether the following corresponding conditions hold:

```
        invoke(proj, *(first + (i - result))) == old_value
        invoke(pred, invoke(proj, *(first + (i - result)))) != false
```

- 6 *Returns:* `{last, result + (last - first)}`.
- 7 *Complexity:* Exactly `last - first` applications of the corresponding predicate and projection.

#### 7.4.6 Fill

[alg.fill]

```
template <class T, OutputIterator<const T&> O, Sentinel<O> S>
        O fill(O first, S last, const T& value);

template <class T, OutputRange<const T&> Rng>
        safe_iterator_t<Rng>
```

```
fill(Rng&& rng, const T& value);
```

```
template <class T, OutputIterator<const T&> O>
  O fill_n(O first, difference_type_t<O> n, const T& value);
```

- 1 *Effects:* fill assigns value through all the iterators in the range [first,last). fill\_n assigns value through all the iterators in the range [first,first + n) if n is positive, otherwise it does nothing.
- 2 *Returns:* fill returns last. fill\_n returns first + n for non-negative values of n and first for negative values.
- 3 *Complexity:* Exactly last - first, n, or 0 assignments, respectively.

### 7.4.7 Generate

[alg.generate]

```
template <Invocable F, OutputIterator<result_of_t<F&&()>> O,
  Sentinel<O> S>
  O generate(O first, S last, F gen);
```

```
template <Invocable F, OutputRange<result_of_t<F&&()>> Rng>
  safe_iterator_t<Rng>
  generate(Rng&& rng, F gen);
```

```
template <Invocable F, OutputIterator<result_of_t<F&&()>> O>
  O generate_n(O first, difference_type_t<O> n, F gen);
```

- 1 *Effects:* Assigns the value of invoke(gen) through successive iterators in the range [first,last), where last is first + max(n, 0) for generate\_n.
- 2 *Returns:* last.
- 3 *Complexity:* Exactly last - first evaluations of invoke(gen) and assignments.

### 7.4.8 Remove

[alg.remove]

```
template <ForwardIterator I, Sentinel<I> S, class T, class Proj = identity>
  requires Permutable<I>() &&
  IndirectRelation<equal_to<>, projected<I, Proj>, const T*>()
  I remove(I first, S last, const T& value, Proj proj = Proj{});
```

```
template <ForwardRange Rng, class T, class Proj = identity>
  requires Permutable<iterator_t<Rng>>() &&
  IndirectRelation<equal_to<>, projected<iterator_t<Rng>, Proj>, const T*>()
  safe_iterator_t<Rng>
  remove(Rng&& rng, const T& value, Proj proj = Proj{});
```

```
template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
  IndirectPredicate<projected<I, Proj>> Pred>
  requires Permutable<I>()
  I remove_if(I first, S last, Pred pred, Proj proj = Proj{});
```

```
template <ForwardRange Rng, class Proj = identity,
  IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
  requires Permutable<iterator_t<Rng>>()
  safe_iterator_t<Rng>
  remove_if(Rng&& rng, Pred pred, Proj proj = Proj{});
```

- 1 *Effects:* Eliminates all the elements referred to by iterator `i` in the range `[first,last)` for which the following corresponding conditions hold: `invoke(proj, *i) == value, invoke(pred, invoke(proj, *i)) != false`.
- 2 *Returns:* The end of the resulting range.
- 3 *Remarks:* Stable (ISO/IEC 14882:2014 §17.6.5.7).
- 4 *Complexity:* Exactly `last - first` applications of the corresponding predicate and projection.
- 5 *Note:* each element in the range `[ret,last)`, where `ret` is the returned value, has a valid but unspecified state, because the algorithms can eliminate elements by moving from elements that were originally in that range.

```
template <InputIterator I, Sentinel<I> S, WeaklyIncrementable O, class T,
    class Proj = identity>
requires IndirectlyCopyable<I, O>() &&
    IndirectRelation<equal_to<>, projected<I, Proj>, const T*>()
tagged_pair<tag::in(I), tag::out(O)>
    remove_copy(I first, S last, O result, const T& value, Proj proj = Proj{});
```

```
template <InputRange Rng, WeaklyIncrementable O, class T, class Proj = identity>
requires IndirectlyCopyable<iterator_t<Rng>, O>() &&
    IndirectRelation<equal_to<>, projected<iterator_t<Rng>, Proj>, const T*>()
tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(O)>
    remove_copy(Rng&& rng, O result, const T& value, Proj proj = Proj{});
```

```
template <InputIterator I, Sentinel<I> S, WeaklyIncrementable O,
    class Proj = identity, IndirectPredicate<projected<I, Proj>> Pred>
requires IndirectlyCopyable<I, O>()
tagged_pair<tag::in(I), tag::out(O)>
    remove_copy_if(I first, S last, O result, Pred pred, Proj proj = Proj{});
```

```
template <InputRange Rng, WeaklyIncrementable O, class Proj = identity,
    IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
requires IndirectlyCopyable<iterator_t<Rng>, O>()
tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(O)>
    remove_copy_if(Rng&& rng, O result, Pred pred, Proj proj = Proj{});
```

- 6 *Requires:* The ranges `[first,last)` and `[result,result + (last - first))` shall not overlap.
- 7 *Effects:* Copies all the elements referred to by the iterator `i` in the range `[first,last)` for which the following corresponding conditions do not hold: `invoke(proj, *i) == value, invoke(pred, invoke(proj, *i)) != false`.
- 8 *Returns:* A pair consisting of `last` and the end of the resulting range.
- 9 *Complexity:* Exactly `last - first` applications of the corresponding predicate and projection.
- 10 *Remarks:* Stable (ISO/IEC 14882:2014 §17.6.5.7).

## 7.4.9 Unique

[alg.unique]

```
template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
    IndirectRelation<projected<I, Proj>> R = equal_to<>>
requires Permutable<I>()
I unique(I first, S last, R comp = R{}, Proj proj = Proj{});
```

```
template <ForwardRange Rng, class Proj = identity,
    IndirectRelation<projected<iterator_t<Rng>, Proj>> R = equal_to<>>
```



```
requires Permutable<iterator_t<Rng>>()
safe_iterator_t<Rng>
  unique(Rng&& rng, R comp = R{}, Proj proj = Proj{});
```

- 1 *Effects:* For a nonempty range, eliminates all but the first element from every consecutive group of equivalent elements referred to by the iterator `i` in the range `[first + 1, last)` for which the following conditions hold: `invoke(proj, *(i - 1)) == invoke(proj, *i)` or `invoke(pred, invoke(proj, *(i - 1)), invoke(proj, *i)) != false`.
- 2 *Returns:* The end of the resulting range.
- 3 *Complexity:* For nonempty ranges, exactly `(last - first) - 1` applications of the corresponding predicate and no more than twice as many applications of the projection.

```
template <InputIterator I, Sentinel<I> S, WeaklyIncrementable O,
  class Proj = identity, IndirectRelation<projected<I, Proj>> R = equal_to<>>
requires IndirectlyCopyable<I, O>() && (ForwardIterator<I>() ||
  ForwardIterator<O>() || IndirectlyCopyableStorable<I, O>())
tagged_pair<tag::in(I), tag::out(O)>
  unique_copy(I first, S last, O result, R comp = R{}, Proj proj = Proj{});
```

```
template <InputRange Rng, WeaklyIncrementable O, class Proj = identity,
  IndirectRelation<projected<iterator_t<Rng>, Proj>> R = equal_to<>>
requires IndirectlyCopyable<iterator_t<Rng>, O>() &&
  (ForwardIterator<iterator_t<Rng>>() || ForwardIterator<O>() ||
  IndirectlyCopyableStorable<iterator_t<Rng>, O>())
tagged_pair<tag::in(safe_iterator_t<Rng>), tag::out(O)>
  unique_copy(Rng&& rng, O result, R comp = R{}, Proj proj = Proj{});
```

- 4 *Requires:* The ranges `[first, last)` and `[result, result + (last - first))` shall not overlap.
- 5 *Effects:* Copies only the first element from every consecutive group of equal elements referred to by the iterator `i` in the range `[first, last)` for which the following corresponding conditions hold: `invoke(proj, *i) == invoke(proj, *(i - 1))` or `invoke(pred, invoke(proj, *i), invoke(proj, *(i - 1))) != false`.
- 6 *Returns:* A pair consisting of `last` and the end of the resulting range.
- 7 *Complexity:* For nonempty ranges, exactly `last - first - 1` applications of the corresponding predicate and no more than twice as many applications of the projection.

#### 7.4.10 Reverse

[alg.reverse]

```
template <BidirectionalIterator I, Sentinel<I> S>
requires Permutable<I>()
  I reverse(I first, S last);
```

```
template <BidirectionalRange Rng>
requires Permutable<iterator_t<Rng>>()
safe_iterator_t<Rng>
  reverse(Rng&& rng);
```

- 1 *Effects:* For each non-negative integer `i < (last - first)/2`, applies `iter_swap` to all pairs of iterators `first + i`, `(last - i) - 1`.
- 2 *Returns:* `last`.
- 3 *Complexity:* Exactly `(last - first)/2` swaps.

```
template <BidirectionalIterator I, Sentinel<I> S, WeaklyIncrementable O>
  requires IndirectlyCopyable<I, O>()
  tagged_pair<tag::in(I), tag::out(O)> reverse_copy(I first, S last, O result);
```

```
template <BidirectionalRange Rng, WeaklyIncrementable O>
  requires IndirectlyCopyable<iterator_t<Rng>, O>()
  tagged_pair<tag::in(unsafe_iterator_t<Rng>), tag::out(O)>
  reverse_copy(Rng&& rng, O result);
```

4 *Effects:* Copies the range `[first,last)` to the range `[result,result+(last-first))` such that for every non-negative integer  $i < (last - first)$  the following assignment takes place: `*(result + (last - first) - 1 - i) = *(first + i)`.

5 *Requires:* The ranges `[first,last)` and `[result,result+(last-first))` shall not overlap.

6 *Returns:* `{last, result + (last - first)}`.

7 *Complexity:* Exactly `last - first` assignments.

### 7.4.11 Rotate

[alg.rotate]

```
template <ForwardIterator I, Sentinel<I> S>
  requires Permutable<I>()
  tagged_pair<tag::begin(I), tag::end(I)> rotate(I first, I middle, S last);
```

```
template <ForwardRange Rng>
  requires Permutable<iterator_t<Rng>>()
  tagged_pair<tag::begin(unsafe_iterator_t<Rng>), tag::end(unsafe_iterator_t<Rng>>
  rotate(Rng&& rng, iterator_t<Rng> middle);
```

1 *Effects:* For each non-negative integer  $i < (last - first)$ , places the element from the position `first + i` into position `first + (i + (last - middle)) % (last - first)`.

2 *Returns:* `{first + (last - middle), last}`.

3 *Remarks:* This is a left rotate.

4 *Requires:* `[first,middle)` and `[middle,last)` shall be valid ranges.

5 *Complexity:* At most `last - first` swaps.

```
template <ForwardIterator I, Sentinel<I> S, WeaklyIncrementable O>
  requires IndirectlyCopyable<I, O>()
  tagged_pair<tag::in(I), tag::out(O)>
  rotate_copy(I first, I middle, S last, O result);
```

```
template <ForwardRange Rng, WeaklyIncrementable O>
  requires IndirectlyCopyable<iterator_t<Rng>, O>()
  tagged_pair<tag::in(unsafe_iterator_t<Rng>), tag::out(O)>
  rotate_copy(Rng&& rng, iterator_t<Rng> middle, O result);
```

6 *Effects:* Copies the range `[first,last)` to the range `[result,result + (last - first))` such that for each non-negative integer  $i < (last - first)$  the following assignment takes place: `*(result + i) = *(first + (i + (middle - first)) % (last - first))`.

7 *Returns:* `{last, result + (last - first)}`.

8 *Requires:* The ranges `[first,last)` and `[result,result + (last - first))` shall not overlap.

9 *Complexity:* Exactly `last - first` assignments.

## 7.4.12 Shuffle

[alg.random.shuffle]

```
template <RandomAccessIterator I, Sentinel<I> S, class Gen>
  requires Permutable<I>() &&
    UniformRandomNumberGenerator<remove_reference_t<Gen>>() &&
    ConvertibleTo<result_of_t<Gen&()>, difference_type_t<I>>()
  I shuffle(I first, S last, Gen&& g);
```

```
template <RandomAccessRange Rng, class Gen>
  requires Permutable<I>() &&
    UniformRandomNumberGenerator<remove_reference_t<Gen>>() &&
    ConvertibleTo<result_of_t<Gen&()>, difference_type_t<I>>()
  safe_iterator_t<Rng>
  shuffle(Rng&& rng, Gen&& g);
```

1 *Effects:* Permutes the elements in the range `[first,last)` such that each possible permutation of those elements has equal probability of appearance.

2 *Complexity:* Exactly `(last - first) - 1` swaps.

3 *Returns:* `last`

4 *Remarks:* To the extent that the implementation of this function makes use of random numbers, the object `g` shall serve as the implementation's source of randomness.

## 7.4.13 Partitions

[alg.partitions]

```
template <InputIterator I, Sentinel<I> S, class Proj = identity,
  IndirectPredicate<projected<I, Proj>> Pred>
  bool is_partitioned(I first, S last, Pred pred, Proj proj = Proj{});
```

```
template <InputRange Rng, class Proj = identity,
  IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
  bool
  is_partitioned(Rng&& rng, Pred pred, Proj proj = Proj{});
```

1 *Returns:* `true` if `[first,last)` is empty or if `[first,last)` is partitioned by `pred` and `proj`, i.e. if all iterators `i` for which `invoke(pred, invoke(proj, *i)) != false` come before those that do not, for every `i` in `[first,last)`.

2 *Complexity:* Linear. At most `last - first` applications of `pred` and `proj`.

```
template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
  IndirectPredicate<projected<I, Proj>> Pred>
  requires Permutable<I>()
  I partition(I first, S last, Pred pred, Proj proj = Proj{});
```

```
template <ForwardRange Rng, class Proj = identity,
  IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
  requires Permutable<iterator_t<Rng>>()
  safe_iterator_t<Rng>
  partition(Rng&& rng, Pred pred, Proj proj = Proj{});
```

3 *Effects:* Permutes the elements in the range `[first,last)` such that there exists an iterator `i` such that for every iterator `j` in the range `[first,i)` `invoke(pred, invoke(proj, *j)) != false`, and for every iterator `k` in the range `[i,last)`, `invoke(pred, invoke(proj, *k)) == false`

4 *Returns:* An iterator `i` such that for every iterator `j` in the range `[first,i)` `invoke(pred, invoke(proj, *j)) != false`, and for every iterator `k` in the range `[i,last)`, `invoke(pred, invoke(proj, *k)) == false`.

- 5 *Complexity:* If I meets the requirements for a BidirectionalIterator, at most  $(\text{last} - \text{first}) / 2$  swaps; otherwise at most  $\text{last} - \text{first}$  swaps. Exactly  $\text{last} - \text{first}$  applications of the predicate and projection.

```
template <BidirectionalIterator I, Sentinel<I> S, class Proj = identity,
        IndirectPredicate<projected<I, Proj>> Pred>
requires Permutable<I>()
I stable_partition(I first, S last, Pred pred, Proj proj = Proj{});
```

```
template <BidirectionalRange Rng, class Proj = identity,
        IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
requires Permutable<iterator_t<Rng>>()
safe_iterator_t<Rng>
stable_partition(Rng&& rng, Pred pred, Proj proj = Proj{});
```

- 6 *Effects:* Permutes the elements in the range  $[\text{first}, \text{last})$  such that there exists an iterator  $i$  such that for every iterator  $j$  in the range  $[\text{first}, i)$   $\text{invoke}(\text{pred}, \text{invoke}(\text{proj}, *j)) \neq \text{false}$ , and for every iterator  $k$  in the range  $[i, \text{last})$ ,  $\text{invoke}(\text{pred}, \text{invoke}(\text{proj}, *k)) = \text{false}$
- 7 *Returns:* An iterator  $i$  such that for every iterator  $j$  in the range  $[\text{first}, i)$ ,  $\text{invoke}(\text{pred}, \text{invoke}(\text{proj}, *j)) \neq \text{false}$ , and for every iterator  $k$  in the range  $[i, \text{last})$ ,  $\text{invoke}(\text{pred}, \text{invoke}(\text{proj}, *k)) = \text{false}$ . The relative order of the elements in both groups is preserved.
- 8 *Complexity:* At most  $(\text{last} - \text{first}) * \log(\text{last} - \text{first})$  swaps, but only linear number of swaps if there is enough extra memory. Exactly  $\text{last} - \text{first}$  applications of the predicate and projection.

```
template <InputIterator I, Sentinel<I> S, WeaklyIncrementable O1, WeaklyIncrementable O2,
        class Proj = identity, IndirectPredicate<projected<I, Proj>> Pred>
requires IndirectlyCopyable<I, O1>() && IndirectlyCopyable<I, O2>()
tagged_tuple<tag::in(I), tag::out1(O1), tag::out2(O2)>
partition_copy(I first, S last, O1 out_true, O2 out_false, Pred pred,
              Proj proj = Proj{});
```

```
template <InputRange Rng, WeaklyIncrementable O1, WeaklyIncrementable O2,
        class Proj = identity,
        IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
requires IndirectlyCopyable<iterator_t<Rng>, O1>() &&
        IndirectlyCopyable<iterator_t<Rng>, O2>()
tagged_tuple<tag::in(safe_iterator_t<Rng>), tag::out1(O1), tag::out2(O2)>
partition_copy(Rng&& rng, O1 out_true, O2 out_false, Pred pred, Proj proj = Proj{});
```

- 9 *Requires:* The input range shall not overlap with either of the output ranges.
- 10 *Effects:* For each iterator  $i$  in  $[\text{first}, \text{last})$ , copies  $*i$  to the output range beginning with  $\text{out\_true}$  if  $\text{invoke}(\text{pred}, \text{invoke}(\text{proj}, *i))$  is true, or to the output range beginning with  $\text{out\_false}$  otherwise.
- 11 *Returns:* A tuple  $p$  such that  $\text{get}<0>(p)$  is  $\text{last}$ ,  $\text{get}<1>(p)$  is the end of the output range beginning at  $\text{out\_true}$ , and  $\text{get}<2>(p)$  is the end of the output range beginning at  $\text{out\_false}$ .
- 12 *Complexity:* Exactly  $\text{last} - \text{first}$  applications of  $\text{pred}$  and  $\text{proj}$ .

```
template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
        IndirectPredicate<projected<I, Proj>> Pred>
I partition_point(I first, S last, Pred pred, Proj proj = Proj{});
```

```
template <ForwardRange Rng, class Proj = identity,
        IndirectPredicate<projected<iterator_t<Rng>, Proj>> Pred>
```

```
safe_iterator_t<Rng>
  partition_point(Rng&& rng, Pred pred, Proj proj = Proj{});
```

13 *Requires:* `[first, last)` shall be partitioned by `pred` and `proj`, i.e. there shall be an iterator `mid` such that `all_of(first, mid, pred, proj)` and `none_of(mid, last, pred, proj)` are both true.

14 *Returns:* An iterator `mid` such that `all_of(first, mid, pred, proj)` and `none_of(mid, last, pred, proj)` are both true.

15 *Complexity:*  $\mathcal{O}(\log(\text{last} - \text{first}))$  applications of `pred` and `proj`.

## 7.5 Sorting and related operations [alg.sorting]

- 1 All the operations in 7.5 take an optional binary callable predicate of type `Comp` that defaults to `less<>`.
- 2 `Comp` is a callable object (ISO/IEC 14882:2014 §20.9.2). The return value of the `invoke` operation applied to an object of type `Comp`, when contextually converted to `bool` (Clause ISO/IEC 14882:2014 §4), yields `true` if the first argument of the call is less than the second, and `false` otherwise. `Comp comp` is used throughout for algorithms assuming an ordering relation. It is assumed that `comp` will not apply any non-constant function through the dereferenced iterator.
- 3 A sequence is *sorted with respect to a comparator and projection* `comp` and `proj` if for every iterator `i` pointing to the sequence and every non-negative integer `n` such that `i + n` is a valid iterator pointing to an element of the sequence, `invoke(comp, invoke(proj, *(i + n)), invoke(proj, *i)) == false`.
- 4 A sequence `[start, finish)` is *partitioned with respect to an expression* `f(e)` if there exists an integer `n` such that for all  $0 \leq i < \text{distance}(\text{start}, \text{finish})$ , `f(*(start + i))` is true if and only if  $i < n$ .
- 5 In the descriptions of the functions that deal with ordering relationships we frequently use a notion of equivalence to describe concepts such as stability. The equivalence to which we refer is not necessarily an `operator==`, but an equivalence relation induced by the strict weak ordering. That is, two elements `a` and `b` are considered equivalent if and only if `!(a < b) && !(b < a)`.

### 7.5.1 Sorting [alg.sort]

#### 7.5.1.1 `sort` [sort]

```
template <RandomAccessIterator I, Sentinel<I> S, class Comp = less<>,
  class Proj = identity>
  requires Sortable<I, Comp, Proj>()
  I sort(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessRange Rng, class Comp = less<>, class Proj = identity>
  requires Sortable<iterator_t<Rng>, Comp, Proj>()
  safe_iterator_t<Rng>
  sort(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});
```

- 1 *Effects:* Sorts the elements in the range `[first, last)`.
- 2 *Complexity:*  $\mathcal{O}(N \log(N))$  (where  $N == \text{last} - \text{first}$ ) comparisons.

#### 7.5.1.2 `stable_sort` [stable.sort]

```
template <RandomAccessIterator I, Sentinel<I> S, class Comp = less<>,
  class Proj = identity>
  requires Sortable<I, Comp, Proj>()
  I stable_sort(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});

template <RandomAccessRange Rng, class Comp = less<>, class Proj = identity>
  requires Sortable<iterator_t<Rng>, Comp, Proj>()
  safe_iterator_t<Rng>
```

```
stable_sort(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});
```

1 *Effects:* Sorts the elements in the range `[first,last)`.

2 *Complexity:* It does at most  $N \log^2(N)$  (where  $N == \text{last} - \text{first}$ ) comparisons; if enough extra memory is available, it is  $N \log(N)$ .

3 *Remarks:* Stable (ISO/IEC 14882:2014 §17.6.5.7).

### 7.5.1.3 partial\_sort

[partial.sort]

```
template <RandomAccessIterator I, Sentinel<I> S, class Comp = less<>,
         class Proj = identity>
requires Sortable<I, Comp, Proj>()
I partial_sort(I first, I middle, S last, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <RandomAccessRange Rng, class Comp = less<>, class Proj = identity>
requires Sortable<iterator_t<Rng>, Comp, Proj>()
safe_iterator_t<Rng>
partial_sort(Rng&& rng, iterator_t<Rng> middle, Comp comp = Comp{},
            Proj proj = Proj{});
```

1 *Effects:* Places the first `middle - first` sorted elements from the range `[first,last)` into the range `[first,middle)`. The rest of the elements in the range `[middle,last)` are placed in an unspecified order.

2 *Complexity:* It takes approximately  $(\text{last} - \text{first}) * \log(\text{middle} - \text{first})$  comparisons.

### 7.5.1.4 partial\_sort\_copy

[partial.sort.copy]

```
template <InputIterator I1, Sentinel<I1> S1, RandomAccessIterator I2, Sentinel<I2> S2,
         class Comp = less<>, class Proj1 = identity, class Proj2 = identity>
requires IndirectlyCopyable<I1, I2>() && Sortable<I2, Comp, Proj2>() &&
IndirectStrictWeakOrder<Comp, projected<I1, Proj1>, projected<I2, Proj2>>()
I2
partial_sort_copy(I1 first, S1 last, I2 result_first, S2 result_last,
                Comp comp = Comp{}, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});
```

```
template <InputRange Rng1, RandomAccessRange Rng2, class Comp = less<>,
         class Proj1 = identity, class Proj2 = identity>
requires IndirectlyCopyable<iterator_t<Rng1>, iterator_t<Rng2>>() &&
Sortable<iterator_t<Rng2>, Comp, Proj2>() &&
IndirectStrictWeakOrder<Comp, projected<iterator_t<Rng1>, Proj1>,
projected<iterator_t<Rng2>, Proj2>>()
safe_iterator_t<Rng2>
partial_sort_copy(Rng1&& rng, Rng2&& result_rng, Comp comp = Comp{},
                Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});
```

1 *Effects:* Places the first `min(last - first, result_last - result_first)` sorted elements into the range `[result_first,result_first + min(last - first, result_last - result_first))`.

2 *Returns:* The smaller of: `result_last` or `result_first + (last - first)`.

3 *Complexity:* Approximately  $(\text{last} - \text{first}) * \log(\min(\text{last} - \text{first}, \text{result\_last} - \text{result\_first}))$  comparisons.

### 7.5.1.5 is\_sorted

[is.sorted]

```
template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
         IndirectStrictWeakOrder<projected<I, Proj>> Comp = less<>>
```

```
bool is_sorted(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <ForwardRange Rng, class Proj = identity,
  IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj>> Comp = less<>>
  bool
  is_sorted(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});
```

1 *Returns:* `is_sorted_until(first, last, comp, proj) == last`

```
template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
  IndirectStrictWeakOrder<projected<I, Proj>> Comp = less<>>
  I is_sorted_until(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <ForwardRange Rng, class Proj = identity,
  IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj>> Comp = less<>>
  safe_iterator_t<Rng>
  is_sorted_until(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});
```

2 *Returns:* If `distance(first, last) < 2`, returns `last`. Otherwise, returns the last iterator `i` in `[first, last]` for which the range `[first, i)` is sorted.

3 *Complexity:* Linear.

## 7.5.2 Nth element

[alg.nth.element]

```
template <RandomAccessIterator I, Sentinel<I> S, class Comp = less<>,
  class Proj = identity>
  requires Sortable<I, Comp, Proj>()
  I nth_element(I first, I nth, S last, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <RandomAccessRange Rng, class Comp = less<>, class Proj = identity>
  requires Sortable<iterator_t<Rng>, Comp, Proj>()
  safe_iterator_t<Rng>
  nth_element(Rng&& rng, iterator_t<Rng> nth, Comp comp = Comp{}, Proj proj = Proj{});
```

1 After `nth_element` the element in the position pointed to by `nth` is the element that would be in that position if the whole range were sorted, unless `nth == last`. Also for every iterator `i` in the range `[first, nth)` and every iterator `j` in the range `[nth, last)` it holds that: `invoke(comp, invoke(proj, *j), invoke(proj, *i)) == false`.

2 *Complexity:* Linear on average.

## 7.5.3 Binary search

[alg.binary.search]

1 All of the algorithms in this section are versions of binary search and assume that the sequence being searched is partitioned with respect to an expression formed by binding the search key to an argument of the comparison function and projection. They work on non-random access iterators minimizing the number of comparisons, which will be logarithmic for all types of iterators. They are especially appropriate for random access iterators, because these algorithms do a logarithmic number of steps through the data structure. For non-random access iterators they execute a linear number of steps.

### 7.5.3.1 lower\_bound

[lower.bound]

```
template <ForwardIterator I, Sentinel<I> S, class T, class Proj = identity,
  IndirectStrictWeakOrder<const T*, projected<I, Proj>> Comp = less<>>
  I
  lower_bound(I first, S last, const T& value, Comp comp = Comp{},
    Proj proj = Proj{});
```

```
template <ForwardRange Rng, class T, class Proj = identity,
    IndirectStrictWeakOrder<const T*, projected<iterator_t<Rng>, Proj>> Comp = less<>>
    safe_iterator_t<Rng>
    lower_bound(Rng&& rng, const T& value, Comp comp = Comp{}, Proj proj = Proj{});
```

- 1 *Requires:* The elements  $e$  of  $[first, last)$  shall be partitioned with respect to the expression `invoke(comp, invoke(proj, e), value)`.
- 2 *Returns:* The furthestmost iterator  $i$  in the range  $[first, last]$  such that for every iterator  $j$  in the range  $[first, i)$  the following corresponding condition holds: `invoke(comp, invoke(proj, *j), value) != false`.
- 3 *Complexity:* At most  $\log_2(last - first) + \mathcal{O}(1)$  applications of the comparison function and projection.

### 7.5.3.2 upper\_bound

[upper\_bound]

```
template <ForwardIterator I, Sentinel<I> S, class T, class Proj = identity,
    IndirectStrictWeakOrder<const T*, projected<I, Proj>> Comp = less<>>
    I
    upper_bound(I first, S last, const T& value, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <ForwardRange Rng, class T, class Proj = identity,
    IndirectStrictWeakOrder<const T*, projected<iterator_t<Rng>, Proj>> Comp = less<>>
    safe_iterator_t<Rng>
    upper_bound(Rng&& rng, const T& value, Comp comp = Comp{}, Proj proj = Proj{});
```

- 1 *Requires:* The elements  $e$  of  $[first, last)$  shall be partitioned with respect to the expression `!invoke(comp, value, invoke(proj, e))`.
- 2 *Returns:* The furthestmost iterator  $i$  in the range  $[first, last]$  such that for every iterator  $j$  in the range  $[first, i)$  the following corresponding condition holds: `invoke(comp, value, invoke(proj, *j)) == false`.
- 3 *Complexity:* At most  $\log_2(last - first) + \mathcal{O}(1)$  applications of the comparison function and projection.

### 7.5.3.3 equal\_range

[equal\_range]

```
template <ForwardIterator I, Sentinel<I> S, class T, class Proj = identity,
    IndirectStrictWeakOrder<const T*, projected<I, Proj>> Comp = less<>>
    tagged_pair<tag::begin(I), tag::end(I)>
    equal_range(I first, S last, const T& value, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <ForwardRange Rng, class T, class Proj = identity,
    IndirectStrictWeakOrder<const T*, projected<iterator_t<Rng>, Proj>> Comp = less<>>
    tagged_pair<tag::begin(safe_iterator_t<Rng>),
        tag::end(safe_iterator_t<Rng>)>
    equal_range(Rng&& rng, const T& value, Comp comp = Comp{}, Proj proj = Proj{});
```

- 1 *Requires:* The elements  $e$  of  $[first, last)$  shall be partitioned with respect to the expressions `invoke(comp, invoke(proj, e), value)` and `!invoke(comp, value, invoke(proj, e))`. Also, for all elements  $e$  of  $[first, last)$ , `invoke(comp, invoke(proj, e), value)` shall imply `!invoke(comp, value, invoke(proj, e))`.
- 2 *Returns:*

```
{lower_bound(first, last, value, comp, proj),
  upper_bound(first, last, value, comp, proj)}
```



- 3 *Complexity:* At most  $2 * \log_2(\text{last} - \text{first}) + \mathcal{O}(1)$  applications of the comparison function and projection.

#### 7.5.3.4 binary\_search

[binary.search]

```
template <ForwardIterator I, Sentinel<I> S, class T, class Proj = identity,
    IndirectStrictWeakOrder<const T*, projected<I, Proj>> Comp = less<>>
    bool
    binary_search(I first, S last, const T& value, Comp comp = Comp{},
        Proj proj = Proj{});

template <ForwardRange Rng, class T, class Proj = identity,
    IndirectStrictWeakOrder<const T*, projected<iterator_t<Rng>, Proj>> Comp = less<>>
    bool
    binary_search(Rng&& rng, const T& value, Comp comp = Comp{},
        Proj proj = Proj{});
```

- 1 *Requires:* The elements  $e$  of  $[\text{first}, \text{last})$  are partitioned with respect to the expressions  $\text{invoke}(\text{comp}, \text{invoke}(\text{proj}, e), \text{value})$  and  $!\text{invoke}(\text{comp}, \text{value}, \text{invoke}(\text{proj}, e))$ . Also, for all elements  $e$  of  $[\text{first}, \text{last})$ ,  $\text{invoke}(\text{comp}, \text{invoke}(\text{proj}, e), \text{value})$  shall imply  $!\text{invoke}(\text{comp}, \text{value}, \text{invoke}(\text{proj}, e))$ .
- 2 *Returns:* true if there is an iterator  $i$  in the range  $[\text{first}, \text{last})$  that satisfies the corresponding conditions:  $\text{invoke}(\text{comp}, \text{invoke}(\text{proj}, *i), \text{value}) == \text{false} \ \&\& \ \text{invoke}(\text{comp}, \text{value}, \text{invoke}(\text{proj}, *i)) == \text{false}$ .
- 3 *Complexity:* At most  $\log_2(\text{last} - \text{first}) + \mathcal{O}(1)$  applications of the comparison function and projection.

#### 7.5.4 Merge

[alg.merge]

```
template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
    WeaklyIncrementable O, class Comp = less<>, class Proj1 = identity,
    class Proj2 = identity>
    requires Mergeable<I1, I2, O, Comp, Proj1, Proj2>()
    tagged_tuple<tag::in1(I1), tag::in2(I2), tag::out(O)>
    merge(I1 first1, S1 last1, I2 first2, S2 last2, O result,
        Comp comp = Comp{}, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputRange Rng1, InputRange Rng2, WeaklyIncrementable O, class Comp = less<>,
    class Proj1 = identity, class Proj2 = identity>
    requires Mergeable<iterator_t<Rng1>, iterator_t<Rng2>, O, Comp, Proj1, Proj2>()
    tagged_tuple<tag::in1(unsafe_iterator_t<Rng1>),
        tag::in2(unsafe_iterator_t<Rng2>),
        tag::out(O)>
    merge(Rng1&& rng1, Rng2&& rng2, O result,
        Comp comp = Comp{}, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});
```

- 1 *Effects:* Copies all the elements of the two ranges  $[\text{first1}, \text{last1})$  and  $[\text{first2}, \text{last2})$  into the range  $[\text{result}, \text{result\_last})$ , where  $\text{result\_last}$  is  $\text{result} + (\text{last1} - \text{first1}) + (\text{last2} - \text{first2})$ . If an element  $a$  precedes  $b$  in an input range,  $a$  is copied into the output range before  $b$ . If  $e1$  is an element of  $[\text{first1}, \text{last1})$  and  $e2$  of  $[\text{first2}, \text{last2})$ ,  $e2$  is copied into the output range before  $e1$  if and only if  $\text{bool}(\text{invoke}(\text{comp}, \text{invoke}(\text{proj2}, e2), \text{invoke}(\text{proj1}, e1)))$  is true.
- 2 *Requires:* The ranges  $[\text{first1}, \text{last1})$  and  $[\text{first2}, \text{last2})$  shall be sorted with respect to  $\text{comp}$ ,  $\text{proj1}$ , and  $\text{proj2}$ . The resulting range shall not overlap with either of the original ranges.
- 3 *Returns:*  $\text{make\_tagged\_tuple}\langle \text{tag::in1}, \text{tag::in2}, \text{tag::out}\rangle(\text{last1}, \text{last2}, \text{result\_last})$ .

4 *Complexity:* At most  $(\text{last1} - \text{first1}) + (\text{last2} - \text{first2}) - 1$  applications of the comparison function and each projection.

5 *Remarks:* Stable (ISO/IEC 14882:2014 §17.6.5.7).

```
template <BidirectionalIterator I, Sentinel<I> S, class Comp = less<>,
        class Proj = identity>
requires Sortable<I, Comp, Proj>()
I
inplace_merge(I first, I middle, S last, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <BidirectionalRange Rng, class Comp = less<>, class Proj = identity>
requires Sortable<iterator_t<Rng>, Comp, Proj>()
safe_iterator_t<Rng>
inplace_merge(Rng&& rng, iterator_t<Rng> middle, Comp comp = Comp{},
              Proj proj = Proj{});
```

6 *Effects:* Merges two sorted consecutive ranges  $[\text{first}, \text{middle})$  and  $[\text{middle}, \text{last})$ , putting the result of the merge into the range  $[\text{first}, \text{last})$ . The resulting range will be in non-decreasing order; that is, for every iterator  $i$  in  $[\text{first}, \text{last})$  other than  $\text{first}$ , the condition  $\text{invoke}(\text{comp}, \text{invoke}(\text{proj}, *i), \text{invoke}(\text{proj}, *(i - 1)))$  will be false.

7 *Requires:* The ranges  $[\text{first}, \text{middle})$  and  $[\text{middle}, \text{last})$  shall be sorted with respect to  $\text{comp}$  and  $\text{proj}$ .

8 *Returns:*  $\text{last}$

9 *Complexity:* When enough additional memory is available,  $(\text{last} - \text{first}) - 1$  applications of the comparison function and projection. If no additional memory is available, an algorithm with complexity  $N \log(N)$  (where  $N$  is equal to  $\text{last} - \text{first}$ ) may be used.

10 *Remarks:* Stable (ISO/IEC 14882:2014 §17.6.5.7).

## 7.5.5 Set operations on sorted structures [alg.set.operations]

1 This section defines all the basic set operations on sorted structures. They also work with **multisets** (ISO/IEC 14882:2014 §23.4.7) containing multiple copies of equivalent elements. The semantics of the set operations are generalized to **multisets** in a standard way by defining `set_union()` to contain the maximum number of occurrences of every element, `set_intersection()` to contain the minimum, and so on.

### 7.5.5.1 includes [includes]

```
template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
        class Proj1 = identity, class Proj2 = identity,
        IndirectStrictWeakOrder<projected<I1, Proj1>, projected<I2, Proj2>> Comp = less<>>
bool
includes(I1 first1, S1 last1, I2 first2, S2 last2, Comp comp = Comp{},
        Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});
```

```
template <InputRange Rng1, InputRange Rng2, class Proj1 = identity,
        class Proj2 = identity,
        IndirectStrictWeakOrder<projected<iterator_t<Rng1>, Proj1>,
        projected<iterator_t<Rng2>, Proj2>> Comp = less<>>
bool
includes(Rng1&& rng1, Rng2&& rng2, Comp comp = Comp{},
        Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});
```

1 *Returns:* `true` if  $[\text{first2}, \text{last2})$  is empty or if every element in the range  $[\text{first2}, \text{last2})$  is contained in the range  $[\text{first1}, \text{last1})$ . Returns `false` otherwise.

- 2 *Complexity:* At most  $2 * ((last1 - first1) + (last2 - first2)) - 1$  applications of the comparison function and projections.

### 7.5.5.2 set\_union

[set.union]

```
template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
    WeaklyIncrementable O, class Comp = less<>, class Proj1 = identity, class Proj2 = identity>
requires Mergeable<I1, I2, O, Comp, Proj1, Proj2>()
tagged_tuple<tag::in1(I1), tag::in2(I2), tag::out(O)>
set_union(I1 first1, S1 last1, I2 first2, S2 last2, O result, Comp comp = Comp{},
    Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});
```

```
template <InputRange Rng1, InputRange Rng2, WeaklyIncrementable O,
    class Comp = less<>, class Proj1 = identity, class Proj2 = identity>
requires Mergeable<iterator_t<Rng1>, iterator_t<Rng2>, O, Comp, Proj1, Proj2>()
tagged_tuple<tag::in1(safe_iterator_t<Rng1>),
    tag::in2(safe_iterator_t<Rng2>),
    tag::out(O)>
set_union(Rng1&& rng1, Rng2&& rng2, O result, Comp comp = Comp{},
    Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});
```

- 1 *Effects:* Constructs a sorted union of the elements from the two ranges; that is, the set of elements that are present in one or both of the ranges.
- 2 *Requires:* The resulting range shall not overlap with either of the original ranges.
- 3 *Returns:* `make_tagged_tuple<tag::in1, tag::in2, tag::out>(last1, last2, result + n)`, where  $n$  is the number of elements in the constructed range.
- 4 *Complexity:* At most  $2 * ((last1 - first1) + (last2 - first2)) - 1$  applications of the comparison function and projections.
- 5 *Remarks:* If `[first1, last1)` contains  $m$  elements that are equivalent to each other and `[first2, last2)` contains  $n$  elements that are equivalent to them, then all  $m$  elements from the first range shall be copied to the output range, in order, and then  $\max(n - m, 0)$  elements from the second range shall be copied to the output range, in order.

### 7.5.5.3 set\_intersection

[set.intersection]

```
template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
    WeaklyIncrementable O, class Comp = less<>, class Proj1 = identity, class Proj2 = identity>
requires Mergeable<I1, I2, O, Comp, Proj1, Proj2>()
0
set_intersection(I1 first1, S1 last1, I2 first2, S2 last2, O result,
    Comp comp = Comp{}, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});
```

```
template <InputRange Rng1, InputRange Rng2, WeaklyIncrementable O,
    class Comp = less<>, class Proj1 = identity, class Proj2 = identity>
requires Mergeable<iterator_t<Rng1>, iterator_t<Rng2>, O, Comp, Proj1, Proj2>()
0
set_intersection(Rng1&& rng1, Rng2&& rng2, O result,
    Comp comp = Comp{}, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});
```

- 1 *Effects:* Constructs a sorted intersection of the elements from the two ranges; that is, the set of elements that are present in both of the ranges.
- 2 *Requires:* The resulting range shall not overlap with either of the original ranges.
- 3 *Returns:* The end of the constructed range.

4 *Complexity:* At most  $2 * ((\text{last1} - \text{first1}) + (\text{last2} - \text{first2})) - 1$  applications of the comparison function and projections.

5 *Remarks:* If  $[\text{first1}, \text{last1})$  contains  $m$  elements that are equivalent to each other and  $[\text{first2}, \text{last2})$  contains  $n$  elements that are equivalent to them, the first  $\min(m, n)$  elements shall be copied from the first range to the output range, in order.

#### 7.5.5.4 set\_difference [set.difference]

```
template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
    WeaklyIncrementable O, class Comp = less<>, class Proj1 = identity, class Proj2 = identity>
requires Mergeable<I1, I2, O, Comp, Proj1, Proj2>()
tagged_pair<tag::in1(I1), tag::out(O)>
set_difference(I1 first1, S1 last1, I2 first2, S2 last2, O result,
    Comp comp = Comp{}, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});
```

```
template <InputRange Rng1, InputRange Rng2, WeaklyIncrementable O,
    class Comp = less<>, class Proj1 = identity, class Proj2 = identity>
requires Mergeable<iterator_t<Rng1>, iterator_t<Rng2>>, O, Comp, Proj1, Proj2>()
tagged_pair<tag::in1(unsafe_iterator_t<Rng1>), tag::out(O)>
set_difference(Rng1&& rng1, Rng2&& rng2, O result,
    Comp comp = Comp{}, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});
```

1 *Effects:* Copies the elements of the range  $[\text{first1}, \text{last1})$  which are not present in the range  $[\text{first2}, \text{last2})$  to the range beginning at `result`. The elements in the constructed range are sorted.

2 *Requires:* The resulting range shall not overlap with either of the original ranges.

3 *Returns:*  $\{\text{last1}, \text{result} + n\}$ , where  $n$  is the number of elements in the constructed range.

4 *Complexity:* At most  $2 * ((\text{last1} - \text{first1}) + (\text{last2} - \text{first2})) - 1$  applications of the comparison function and projections.

5 *Remarks:* If  $[\text{first1}, \text{last1})$  contains  $m$  elements that are equivalent to each other and  $[\text{first2}, \text{last2})$  contains  $n$  elements that are equivalent to them, the last  $\max(m - n, 0)$  elements from  $[\text{first1}, \text{last1})$  shall be copied to the output range.

#### 7.5.5.5 set\_symmetric\_difference [set.symmetric.difference]

```
template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
    WeaklyIncrementable O, class Comp = less<>, class Proj1 = identity, class Proj2 = identity>
requires Mergeable<I1, I2, O, Comp, Proj1, Proj2>()
tagged_tuple<tag::in1(I1), tag::in2(I2), tag::out(O)>
set_symmetric_difference(I1 first1, S1 last1, I2 first2, S2 last2, O result,
    Comp comp = Comp{}, Proj1 proj1 = Proj1{},
    Proj2 proj2 = Proj2{});
```

```
template <InputRange Rng1, InputRange Rng2, WeaklyIncrementable O,
    class Comp = less<>, class Proj1 = identity, class Proj2 = identity>
requires Mergeable<iterator_t<Rng1>, iterator_t<Rng2>>, O, Comp, Proj1, Proj2>()
tagged_tuple<tag::in1(unsafe_iterator_t<Rng1>),
    tag::in2(unsafe_iterator_t<Rng2>),
    tag::out(O)>
set_symmetric_difference(Rng1&& rng1, Rng2&& rng2, O result, Comp comp = Comp{},
    Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});
```

1 *Effects:* Copies the elements of the range  $[\text{first1}, \text{last1})$  that are not present in the range  $[\text{first2}, \text{last2})$ , and the elements of the range  $[\text{first2}, \text{last2})$  that are not present in the range  $[\text{first1}, \text{last1})$  to the range beginning at `result`. The elements in the constructed range are sorted.

- 2 *Requires:* The resulting range shall not overlap with either of the original ranges.
- 3 *Returns:* `make_tagged_tuple<tag::in1, tag::in2, tag::out>(last1, last2, result + n)`, where  $n$  is the number of elements in the constructed range.
- 4 *Complexity:* At most  $2 * ((last1 - first1) + (last2 - first2)) - 1$  applications of the comparison function and projections.
- 5 *Remarks:* If `[first1, last1)` contains  $m$  elements that are equivalent to each other and `[first2, last2)` contains  $n$  elements that are equivalent to them, then  $|m - n|$  of those elements shall be copied to the output range: the last  $m - n$  of these elements from `[first1, last1)` if  $m > n$ , and the last  $n - m$  of these elements from `[first2, last2)` if  $m < n$ .

### 7.5.6 Heap operations

[alg.heap.operations]

- 1 A *heap* is a particular organization of elements in a range between two random access iterators `[a, b)`. Its two key properties are:

- (1) There is no element greater than `*a` in the range and
- (2) `*a` may be removed by `pop_heap()`, or a new element added by `push_heap()`, in  $\mathcal{O}(\log(N))$  time.

- 2 These properties make heaps useful as priority queues.

- 3 `make_heap()` converts a range into a heap and `sort_heap()` turns a heap into a sorted sequence.

#### 7.5.6.1 push\_heap

[push.heap]

```
template <RandomAccessIterator I, Sentinel<I> S, class Comp = less<>,
         class Proj = identity>
requires Sortable<I, Comp, Proj>()
I push_heap(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <RandomAccessRange Rng, class Comp = less<>, class Proj = identity>
requires Sortable<iterator_t<Rng>, Comp, Proj>()
safe_iterator_t<Rng>
push_heap(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});
```

- 1 *Effects:* Places the value in the location `last - 1` into the resulting heap `[first, last)`.

- 2 *Requires:* The range `[first, last - 1)` shall be a valid heap.

- 3 *Returns:* `last`

- 4 *Complexity:* At most  $\log(last - first)$  applications of the comparison function and projection.

#### 7.5.6.2 pop\_heap

[pop.heap]

```
template <RandomAccessIterator I, Sentinel<I> S, class Comp = less<>,
         class Proj = identity>
requires Sortable<I, Comp, Proj>()
I pop_heap(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <RandomAccessRange Rng, class Comp = less<>, class Proj = identity>
requires Sortable<iterator_t<Rng>, Comp, Proj>()
safe_iterator_t<Rng>
pop_heap(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});
```

- 1 *Requires:* The range `[first, last)` shall be a valid non-empty heap.

- 2 *Effects:* Swaps the value in the location `first` with the value in the location `last - 1` and makes `[first, last - 1)` into a heap.

3 *Returns:* last

4 *Complexity:* At most  $2 * \log(\text{last} - \text{first})$  applications of the comparison function and projection.

### 7.5.6.3 make\_heap

[make.heap]

```
template <RandomAccessIterator I, Sentinel<I> S, class Comp = less<>,
         class Proj = identity>
requires Sortable<I, Comp, Proj>()
I make_heap(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <RandomAccessRange Rng, class Comp = less<>, class Proj = identity>
requires Sortable<iterator_t<Rng>, Comp, Proj>()
safe_iterator_t<Rng>
make_heap(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});
```

1 *Effects:* Constructs a heap out of the range [first,last).

2 *Returns:* last

3 *Complexity:* At most  $3 * (\text{last} - \text{first})$  applications of the comparison function and projection.

### 7.5.6.4 sort\_heap

[sort.heap]

```
template <RandomAccessIterator I, Sentinel<I> S, class Comp = less<>,
         class Proj = identity>
requires Sortable<I, Comp, Proj>()
I sort_heap(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <RandomAccessRange Rng, class Comp = less<>, class Proj = identity>
requires Sortable<iterator_t<Rng>, Comp, Proj>()
safe_iterator_t<Rng>
sort_heap(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});
```

1 *Effects:* Sorts elements in the heap [first,last).

2 *Requires:* The range [first,last) shall be a valid heap.

3 *Returns:* last

4 *Complexity:* At most  $N \log(N)$  comparisons (where  $N == \text{last} - \text{first}$ ).

### 7.5.6.5 is\_heap

[is.heap]

```
template <RandomAccessIterator I, Sentinel<I> S, class Proj = identity,
         IndirectStrictWeakOrder<projected<I, Proj>> Comp = less<>>
bool is_heap(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <RandomAccessRange Rng, class Proj = identity,
         IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj>> Comp = less<>>
bool
is_heap(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});
```

1 *Returns:* `is_heap_until(first, last, comp, proj) == last`

```
template <RandomAccessIterator I, Sentinel<I> S, class Proj = identity,
         IndirectStrictWeakOrder<projected<I, Proj>> Comp = less<>>
I is_heap_until(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <RandomAccessRange Rng, class Proj = identity,
         IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj>> Comp = less<>>
safe_iterator_t<Rng>
```

```
is_heap_until(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});
```

2 *Returns:* If `distance(first, last) < 2`, returns `last`. Otherwise, returns the last iterator `i` in `[first,last]` for which the range `[first,i)` is a heap.

3 *Complexity:* Linear.

### 7.5.7 Minimum and maximum

[alg.min.max]

```
template <class T, class Proj = identity,
  IndirectStrictWeakOrder<projected<const T*, Proj>> Comp = less<>>
  constexpr const T& min(const T& a, const T& b, Comp comp = Comp{}, Proj proj = Proj{});
```

1 *Returns:* The smaller value.

2 *Remarks:* Returns the first argument when the arguments are equivalent.

```
template <Copyable T, class Proj = identity,
  IndirectStrictWeakOrder<projected<const T*, Proj>> Comp = less<>>
  constexpr T min(initializer_list<T> rng, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <InputRange Rng, class Proj = identity,
  IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj>> Comp = less<>>
  requires Copyable<value_type_t<iterator_t<Rng>>>()
  value_type_t<iterator_t<Rng>>
  min(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});
```

3 *Requires:* `distance(rng) > 0`.

4 *Returns:* The smallest value in the `initializer_list` or range.

5 *Remarks:* Returns a copy of the leftmost argument when several arguments are equivalent to the smallest.

```
template <class T, class Proj = identity,
  IndirectStrictWeakOrder<projected<const T*, Proj>> Comp = less<>>
  constexpr const T& max(const T& a, const T& b, Comp comp = Comp{}, Proj proj = Proj{});
```

6 *Returns:* The larger value.

7 *Remarks:* Returns the first argument when the arguments are equivalent.

```
template <Copyable T, class Proj = identity,
  IndirectStrictWeakOrder<projected<const T*, Proj>> Comp = less<>>
  constexpr T max(initializer_list<T> rng, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <InputRange Rng, class Proj = identity,
  IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj>> Comp = less<>>
  requires Copyable<value_type_t<iterator_t<Rng>>>()
  value_type_t<iterator_t<Rng>>
  max(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});
```

8 *Requires:* `distance(rng) > 0`.

9 *Returns:* The largest value in the `initializer_list` or range.

10 *Remarks:* Returns a copy of the leftmost argument when several arguments are equivalent to the largest.

```
template <class T, class Proj = identity,
  IndirectStrictWeakOrder<projected<const T*, Proj>> Comp = less<>>
  constexpr tagged_pair<tag::min(const T&), tag::max(const T&)>
  minmax(const T& a, const T& b, Comp comp = Comp{}, Proj proj = Proj{});
```

11 *Returns:* {b, a} if b is smaller than a, and {a, b} otherwise.

12 *Remarks:* Returns {a, b} when the arguments are equivalent.

13 *Complexity:* Exactly one comparison and exactly two applications of the projection.

```
template <Copyable T, class Proj = identity,
  IndirectStrictWeakOrder<projected<const T*, Proj>> Comp = less<>>
  constexpr tagged_pair<tag::min(T), tag::max(T)>
  minmax(initializer_list<T> rng, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <InputRange Rng, class Proj = identity,
  IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj> Comp = less<>>
  requires Copyable<value_type_t<iterator_t<Rng>>>()
  tagged_pair<tag::min(value_type_t<iterator_t<Rng>>),
    tag::max(value_type_t<iterator_t<Rng>>)>
  minmax(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});
```

14 *Requires:* distance(rng) > 0.

15 *Returns:* {x, y}, where x has the smallest and y has the largest value in the initializer\_list or range.

16 *Remarks:* x is a copy of the leftmost argument when several arguments are equivalent to the smallest. y is a copy of the rightmost argument when several arguments are equivalent to the largest.

17 *Complexity:* At most  $(3/2) * \text{distance}(\text{rng})$  applications of the corresponding predicate, and at most twice as many applications of the projection.

```
template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
  IndirectStrictWeakOrder<projected<I, Proj>> Comp = less<>>
  I min_element(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <ForwardRange Rng, class Proj = identity,
  IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj>> Comp = less<>>
  safe_iterator_t<Rng>
  min_element(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});
```

18 *Returns:* The first iterator i in the range [first,last) such that for every iterator j in the range [first,last) the following corresponding condition holds: invoke(comp, invoke(proj, \*j), invoke(proj, \*i)) == false. Returns last if first == last.

19 *Complexity:* Exactly  $\max((\text{last} - \text{first}) - 1, 0)$  applications of the comparison function and exactly twice as many applications of the projection.

```
template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
  IndirectStrictWeakOrder<projected<I, Proj>> Comp = less<>>
  I max_element(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <ForwardRange Rng, class Proj = identity,
  IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj>> Comp = less<>>
  safe_iterator_t<Rng>
  max_element(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});
```

20 *Returns:* The first iterator i in the range [first,last) such that for every iterator j in the range [first,last) the following corresponding condition holds: invoke(comp, invoke(proj, \*i), invoke(proj, \*j)) == false. Returns last if first == last.

21 *Complexity:* Exactly  $\max((\text{last} - \text{first}) - 1, 0)$  applications of the comparison function and exactly twice as many applications of the projection.



```
template <ForwardIterator I, Sentinel<I> S, class Proj = identity,
        IndirectStrictWeakOrder<projected<I, Proj>> Comp = less<>>
    tagged_pair<tag::min(I), tag::max(I)>
    minmax_element(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <ForwardRange Rng, class Proj = identity,
        IndirectStrictWeakOrder<projected<iterator_t<Rng>, Proj>> Comp = less<>>
    tagged_pair<tag::min(unsafe_iterator_t<Rng>),
                tag::max(unsafe_iterator_t<Rng>)>
    minmax_element(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});
```

22 *Returns:* {first, first} if [first,last) is empty, otherwise {m, M}, where m is the first iterator in [first,last) such that no iterator in the range refers to a smaller element, and where M is the last iterator in [first,last) such that no iterator in the range refers to a larger element.

23 *Complexity:* At most  $\max(\lfloor \frac{3}{2}(N-1) \rfloor, 0)$  applications of the comparison function and at most twice as many applications of the projection, where  $N$  is `distance(first, last)`.

### 7.5.8 Lexicographical comparison [alg.lex.comparison]

```
template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, Sentinel<I2> S2,
        class Proj1 = identity, class Proj2 = identity,
        IndirectStrictWeakOrder<projected<I1, Proj1>, projected<I2, Proj2>> Comp = less<>>
    bool
    lexicographical_compare(I1 first1, S1 last1, I2 first2, S2 last2,
                           Comp comp = Comp{}, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});
```

```
template <InputRange Rng1, InputRange Rng2, class Proj1 = identity,
        class Proj2 = identity,
        IndirectStrictWeakOrder<projected<iterator_t<Rng1>, Proj1>,
        projected<iterator_t<Rng2>, Proj2>> Comp = less<>>
    bool
    lexicographical_compare(Rng1&& rng1, Rng2&& rng2, Comp comp = Comp{},
                           Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});
```

1 *Returns:* `true` if the sequence of elements defined by the range [first1,last1) is lexicographically less than the sequence of elements defined by the range [first2,last2) and `false` otherwise.

2 *Complexity:* At most  $2 \cdot \min((\text{last1} - \text{first1}), (\text{last2} - \text{first2}))$  applications of the corresponding comparison and projection.

3 *Remarks:* If two sequences have the same number of elements and their corresponding elements are equivalent, then neither sequence is lexicographically less than the other. If one sequence is a prefix of the other, then the shorter sequence is lexicographically less than the longer sequence. Otherwise, the lexicographical comparison of the sequences yields the same result as the comparison of the first corresponding pair of elements that are not equivalent.

```
for ( ; first1 != last1 && first2 != last2 ; ++first1, (void) ++first2) {
    if (invoke(comp, invoke(proj1, *first1), invoke(proj2, *first2))) return true;
    if (invoke(comp, invoke(proj2, *first2), invoke(proj1, *first1))) return false;
}
return first1 == last1 && first2 != last2;
```

4 *Remarks:* An empty sequence is lexicographically less than any non-empty sequence, but not less than any empty sequence.

### 7.5.9 Permutation generators [alg.permutation.generators]

```
template <BidirectionalIterator I, Sentinel<I> S, class Comp = less<>,
        class Proj = identity>
requires Sortable<I, Comp, Proj>()
bool next_permutation(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <BidirectionalRange Rng, class Comp = less<>,
        class Proj = identity>
requires Sortable<iterator_t<Rng>, Comp, Proj>()
bool
next_permutation(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});
```

1 *Effects:* Takes a sequence defined by the range `[first,last)` and transforms it into the next permutation. The next permutation is found by assuming that the set of all permutations is lexicographically sorted with respect to `comp` and `proj`. If such a permutation exists, it returns `true`. Otherwise, it transforms the sequence into the smallest permutation, that is, the ascendingly sorted one, and returns `false`.

2 *Complexity:* At most  $(last - first)/2$  swaps.

```
template <BidirectionalIterator I, Sentinel<I> S, class Comp = less<>,
        class Proj = identity>
requires Sortable<I, Comp, Proj>()
bool prev_permutation(I first, S last, Comp comp = Comp{}, Proj proj = Proj{});
```

```
template <BidirectionalRange Rng, class Comp = less<>,
        class Proj = identity>
requires Sortable<iterator_t<Rng>, Comp, Proj>()
bool
prev_permutation(Rng&& rng, Comp comp = Comp{}, Proj proj = Proj{});
```

3 *Effects:* Takes a sequence defined by the range `[first,last)` and transforms it into the previous permutation. The previous permutation is found by assuming that the set of all permutations is lexicographically sorted with respect to `comp` and `proj`.

4 *Returns:* `true` if such a permutation exists. Otherwise, it transforms the sequence into the largest permutation, that is, the descendingly sorted one, and returns `false`.

5 *Complexity:* At most  $(last - first)/2$  swaps.

## 7.6 C library algorithms

[alg.c.library]

1 Table 10 describes some of the contents of the header `<cstdlib>`.

Table 10 — Header `<cstdlib>` synopsis

| Type       | Name(s)       |
|------------|---------------|
| Type:      | size_t        |
| Functions: | bsearch qsort |

2 The contents are the same as the Standard C library header `<stdlib.h>` with the following exceptions:

3 The function signature:

```
bsearch(const void *, const void *, size_t, size_t,
        int (*)(const void *, const void *));
```

is replaced by the two declarations:

```
extern "C" void* bsearch(const void* key, const void* base,
                        size_t nmemb, size_t size,
                        int (*compar)(const void*, const void*));
extern "C++" void* bsearch(const void* key, const void* base,
                           size_t nmemb, size_t size,
                           int (*compar)(const void*, const void*));
```

both of which have the same behavior as the original declaration.

<sup>4</sup> The function signature:

```
qsort(void *, size_t, size_t,
      int (*)(const void *, const void *));
```

is replaced by the two declarations:

```
extern "C" void qsort(void* base, size_t nmemb, size_t size,
                     int (*compar)(const void*, const void*));
extern "C++" void qsort(void* base, size_t nmemb, size_t size,
                       int (*compar)(const void*, const void*));
```

both of which have the same behavior as the original declaration. The behavior is undefined unless the objects in the array pointed to by `base` are of trivial type.

[*Note:* Because the function argument `compar()` may throw an exception, `bsearch()` and `qsort()` are allowed to propagate the exception (ISO/IEC 14882:2014 §17.6.5.12). — *end note*]

SEE ALSO: ISO C 7.10.5.

## 8 Numerics library

[numerics]

Header `<experimental/ranges/random>` synopsis

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    template <class G>
    concept bool UniformRandomNumberGenerator() { return see below; }
}}}}
```

### 8.1 Uniform random number generator requirements

[rand.req.urng]

*// defined in <experimental/ranges/random>*

```
namespace std { namespace experimental { namespace ranges { inline namespace v1 {
    template <class G>
    concept bool UniformRandomNumberGenerator() {
        return requires(G g) {
            { g() } -> UnsignedIntegral; // not required to be equality preserving
            { G::min() } -> Same<result_of_t<G&()>>;
            { G::max() } -> Same<result_of_t<G&()>>;
        };
    }
}}}}
```

- <sup>1</sup> A *uniform random number generator* `g` of type `G` is a function object returning unsigned integer values such that each value in the range of possible results has (ideally) equal probability of being returned. [ *Note*: The degree to which `g`'s results approximate the ideal is often determined statistically. — *end note* ]
- <sup>2</sup> Let `g` be any object of type `G`. Then `UniformRandomNumberGenerator<G>()` is satisfied if and only if
  - (2.1) — Both `G::min()` and `G::max()` are constant expressions (ISO/IEC 14882:2014 §5.19).
  - (2.2) — `G::min() < G::max()`.
  - (2.3) — `G::min() <= g()`.
  - (2.4) — `g() <= G::max()`.
  - (2.5) — `g()` has amortized constant complexity.

# Annex A (normative)

## Compatibility features

[depr]

- <sup>1</sup> This Clause describes features of this document that are specified for compatibility with existing implementations.
- <sup>2</sup> These are deprecated features, where *deprecated* is defined as: Normative for the current edition of the Ranges TS, but having been identified as a candidate for removal from future revisions. An implementation may declare library names and entities described in this section with the `deprecated` attribute (ISO/IEC 14882:2014 §7.6.5).

### A.1 Rvalue range access [depr.rvalue.ranges]

- <sup>1</sup> Use of the range access customization point objects `begin`, `end`, `cbegin`, `cend`, `rbegin`, `rend`, `crbegin`, `crend`, `data`, and `cdata` with rvalue arguments is deprecated. In a future revision of this document, such usage could become ill-formed.

### A.2 Range-and-a-half algorithms [depr.algo.range-and-a-half]

- <sup>1</sup> The following algorithms are deemed unsafe and are deprecated in this document.

```
// 7.3.10, mismatch
template <InputIterator I1, Sentinel<I1> S1, InputIterator I2,
         class Proj1 = identity, class Proj2 = identity,
         IndirectPredicate<projected<I1, Proj1>, projected<I2, Proj2>> Pred = equal_to<>>
tagged_pair<tag::in1(I1), tag::in2(I2)>
mismatch(I1 first1, S1 last1, I2 first2, Pred pred = Pred{},
         Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputRange Rng1, InputIterator I2,
         class Proj1 = identity, class Proj2 = identity,
         IndirectPredicate<projected<iterator_t<Rng1>, Proj1>,
         projected<I2, Proj2>> Pred = equal_to<>>
tagged_pair<tag::in1(unsafe_iterator_t<Rng1>), tag::in2(I2)>
mismatch(Rng1&& rng1, I2 first2, Pred pred = Pred{},
         Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

// 7.3.11, equal
template <InputIterator I1, Sentinel<I1> S1, InputIterator I2,
         class Pred = equal_to<>, class Proj1 = identity, class Proj2 = identity>
requires IndirectlyComparable<I1, I2, Pred, Proj1, Proj2>()
bool equal(I1 first1, S1 last1,
           I2 first2, Pred pred = Pred{},
           Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputRange Rng1, InputIterator I2, class Pred = equal_to<>,
         class Proj1 = identity, class Proj2 = identity>
requires IndirectlyComparable<iterator_t<Rng1>, I2, Pred, Proj1, Proj2>()
bool equal(Rng1&& rng1, I2 first2, Pred pred = Pred{},
           Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

// 7.3.12, is_permutation
```

```

template <ForwardIterator I1, Sentinel<I1> S1, ForwardIterator I2,
    class Pred = equal_to<>, class Proj1 = identity, class Proj2 = identity>
requires IndirectlyComparable<I1, I2, Pred, Proj1, Proj2>()
bool is_permutation(I1 first1, S1 last1, I2 first2,
    Pred pred = Pred{},
    Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <ForwardRange Rng1, ForwardIterator I2, class Pred = equal_to<>,
    class Proj1 = identity, class Proj2 = identity>
requires IndirectlyComparable<iterator_t<Rng1>, I2, Pred, Proj1, Proj2>()
bool is_permutation(Rng1&& rng1, I2 first2, Pred pred = Pred{},
    Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

// 7.4.3, swap_ranges
template <ForwardIterator I1, Sentinel<I1> S1, ForwardIterator I2>
requires IndirectlySwappable<I1, I2>()
tagged_pair<tag::in1(I1), tag::in2(I2)>
    swap_ranges(I1 first1, S1 last1, I2 first2);

template <ForwardRange Rng, ForwardIterator I>
requires IndirectlySwappable<iterator_t<Rng>, I>()
tagged_pair<tag::in1(safe_iterator_t<Rng>), tag::in2(I)>
    swap_ranges(Rng&& rng1, I first2);

// 7.4.4, transform
template <InputIterator I1, Sentinel<I1> S1, InputIterator I2, WeaklyIncrementable O,
    class F, class Proj1 = identity, class Proj2 = identity>
requires Writable<O, indirect_result_of_t<F&&(projected<I1, Proj1>, projected<I2, Proj2>>>>()
tagged_tuple<tag::in1(I1), tag::in2(I2), tag::out(O)>
    transform(I1 first1, S1 last1, I2 first2, O result,
        F binary_op, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

template <InputRange Rng, InputIterator I, WeaklyIncrementable O, class F,
    class Proj1 = identity, class Proj2 = identity>
requires Writable<O, indirect_result_of_t<F&&(
    projected<iterator_t<Rng>, Proj1>, projected<I, Proj2>>>>()
tagged_tuple<tag::in1(safe_iterator_t<Rng>), tag::in2(I), tag::out(O)>
    transform(Rng&& rng1, I first2, O result,
        F binary_op, Proj1 proj1 = Proj1{}, Proj2 proj2 = Proj2{});

```

# Annex B (informative)

## Acknowledgements [acknowledgements]

The design of this specification is based, in part, on a concept specification of the algorithms part of the C++ standard library, known as “The Palo Alto” report (1.2), which was developed by a large group of experts as a test of the expressive power of the idea of concepts.

The authors would like to thank Andrew Sutton for his work on the Concepts TS (1.2), for his help formalizing the ideas of the range-v3 library [2] on which this work is based, and for his review of this document.

Sean Parent has made major contributions to both the foundations and the wording of this paper.

Stephan T. Lavavej offered a careful review of much of this document, a non-trivial undertaking.

We would also like to thank the members of the Ranges SG who offered feedback on early drafts, especially Tony Van Eerd and Walter Brown.

Christopher Di Bella has contributed many editorial fixes.

This work was made possible by a generous grant from the Standard C++ Foundation.

# Annex C (informative)

## Compatibility

[diff]

### C.1 C++ and Ranges

[diff.cpp]

- <sup>1</sup> This section details the known breaking changes likely to effect user code when being ported to the version of the Standard Library described in this document.

#### C.1.1 Algorithm Return Types

[diff.cpp.algo\_return]

- <sup>1</sup> The algorithms described in this document permit the type of the end sentinel to differ from the type of the begin iterator. This is so that the algorithms can operate on ranges for which the physical end position is not yet known.
- <sup>2</sup> The physical end position of the input range is determined during the execution of many of the algorithms. Rather than lose that potentially useful information, the design presented here has such algorithms return the iterator position of the end of the range. In many cases, this is a breaking change. Some algorithms that return iterators in today's STL are changed to return pairs, and algorithms that return pairs today are changed to return tuples. This is likely to be the most noticeable breaking change.
- <sup>3</sup> Alternate designs that were less impactful were considered and dismissed. See Section 3.3.6 in N4128 (1.2) for a discussion of the issues.

#### C.1.2 Stronger Constraints

[diff.cpp.constraints]

- <sup>1</sup> In this proposal, many algorithms and utilities get stricter type checking. For example, algorithms constrained with `LessThanComparable` today are constrained by `StrictTotallyOrdered` in this document. This concept requires types to provide *all* the relational operators, not just `operator<`.
- <sup>2</sup> The use of coarser-grained, higher-level concepts in algorithm constraints is to make the type checks more semantic in nature and less syntactic. It also has the benefit of being less verbose while giving algorithm implementors greater implementation freedom. This approach is in contrast to the previous effort to add concepts to the Standard Library in the C++0x timeframe, which saw a proliferation of small, purely syntactic concepts and algorithm constraints that merely restated the algorithms' implementation details more verbosely in the algorithms' function signatures.
- <sup>3</sup> The potential for breakage must be carefully weighed against the integrity and complexity of the constraints system. The coarseness of the concepts may need to change in response to real-world usage.

#### C.1.3 Constrained Functional Objects

[diff.cpp.functional]

- <sup>1</sup> The algorithm design described in this document assumes that the function objects `std::equal_to` and `std::less` get constraints added to their function call operators. (The former is constrained with `EqualityComparable` and the latter with `StrictTotallyOrdered`). Similar constraints are added to the other function objects in `<functional>`. As with the coarsely-grained algorithm constraints, these function object constraints are likely to cause user code to break.
- <sup>2</sup> Real-world experience is needed to assess the seriousness of the breakage. From a correctness point of view, the constraints are logical and valuable, but it's possible that for the sake of compatibility we provide both constrained and unconstrained functional objects.



### C.1.4 Iterators and Default-Constructibility [diff.cpp.defaultconstruct]

- <sup>1</sup> In today's STL, iterators need not be default-constructible. The `Iterator` concept described in this document requires default-constructibility. This could potentially cause breakage in users' code. Also, it makes the implementation of some types of iterators more complicated. Any iterator that has members that are not default constructible (e.g., an iterator that contains a lambda that has captured by reference) must take special steps to provide default-constructibility (e.g., by wrapping non-default-constructible types in `std::optional`). This can weaken class invariants.
- <sup>2</sup> The guarantee of default-constructibility simplifies the implementation of much iterator- and range-based code that would otherwise need to wrap iterators in `std::optional`. But the needs of backward-compatibility, the extra complexity to iterator implementors, and the weakened invariants may prove to be too great a burden.
- <sup>3</sup> We may in fact go even farther and remove the requirement of default-constructibility from the `Semiregular` concept. Time and experience will give us guidance here.

### C.1.5 `iterator_traits` cannot be specialized [diff.cpp.iteratortraits]

- <sup>1</sup> In this STL design, `iterator_traits` changes from being a class template to being an alias template. This is to intentionally break any code that tries to specialize it. In its place are the three class templates `difference_type`, `value_type`, and `iterator_category`. The need for this traits balkanization is because the associated types belong to separate concepts: `difference_type` belongs to `WeaklyIncrementable`; `value_type` belongs to `Readable`; and `iterator_category` belongs to `InputIterator`.
- <sup>2</sup> This breakage is intentional and inherent in the decomposition of the iterator concepts established by The Palo Alto report (1.2).

## C.2 Ranges and the Palo Alto TR (N3351) [diff.n3351]

- <sup>1</sup> The Palo Alto report (1.2) presents a comprehensive design for the Standard Template Library constrained with concepts. It served both as a basis for the Concepts Lite language feature and for this document. However, this document diverges from the Palo Alto report in small ways. The differences are in the interests of backwards compatibility, to avoid confusing a large installed base of programmers already familiar with the STL, and to keep the scope of this document as small as possible. This section describes the ways in which the two suggested designs differ.

### C.2.1 Sentinels [diff.n3351.sentinel]

- <sup>1</sup> In the design presented in this document, the type of a range's end delimiter may differ from the iterator representing the range's start position. The reasons for this change are described in N4128 (1.2). This causes a number of differences from the Palo Alto report:
  - (1.1) — The algorithms get an additional constraint for the sentinel.
  - (1.2) — The return types of the algorithms are changed as described above (C.1.1).
  - (1.3) — Some algorithms have operational semantics that require them to know the physical end position (e.g., `reverse`). Those algorithms must make an  $\mathcal{O}(N)$  probe for the end position before proceeding. This does not change the operational semantics of any code that is valid today (the probe is unnecessary when the types of the begin and end are the same), and even when the probe is needed, in no cases does this change the complexity guarantee of any algorithm.

### C.2.2 Invocables and Projections [diff.n3351.invok\_proj]

- <sup>1</sup> Adobe's Source Libraries [1] pioneered the use of *callable*s and *projection*s in the standard algorithms. Invocables let users pass member pointers where the algorithms expect callables, saving users the trouble of using a binder or a lambda. Projections are extra optional arguments that give users a way to trivially

transform input data on the fly during the execution of the algorithms. Neither significantly changes the operational semantics of the algorithms, but they do change the form of the algorithm constraints. To deal with the extra complexity of the constraints, the design presented here adds higher-level composite concepts for concisely expressing the necessary relationships between callables, iterators, and projections.

### C.2.3 No Distinct `DistanceType` Associated Type [diff.n3351.distance\_type]

- <sup>1</sup> In the Palo Alto report, the `WeaklyIncrementable` concept has an associated type called `DistanceType`, and the `RandomAccessIterator` concept adds another associated type called `DifferenceType`. The latter is required to be convertible to the former, but they are not required to be the same type. (`DifferenceType` is required to be a signed integral type, but `DistanceType` need not be signed.) Although sensible from a soundness point of view, the author of this paper feels this is potentially a rich source of confusion. This paper hews closer to the current standard by having only one associated type, `DifferenceType`, and requiring it to be signed.

### C.2.4 Distance Primitive is $O(1)$ for Random Access Iterators [diff.n3351.distance\_algo]

- <sup>1</sup> In the Palo Alto report, the `distance` iterator primitive for computing the distance from one iterator position to another is not implemented in terms of `operator-` for random access iterators. `distance`, according to the report, should always be  $\mathcal{O}(N)$ . It reads:

The standard mandates a different definition for random access iterators: `distance(i, j) == j - i`. We see this as a specification error; the guarantees of the `distance` operation have been weakened for an iterator specialization.

In our design, we consider the two operations to be distinct.

The design presented in this document keeps the specialization for random access iterators. To do otherwise would be to silently break complexity guarantees in an unknown amount of working code.

To address the concern about weakened guarantees of the `distance` primitive, the design presented here requires that random access iterators model `SizedSentinel` (6.2.8). The `SizedSentinel` concept requires that `b - a` return the number of times `a` would have to be incremented to make it compare equal to `b`. Any type purporting to be a random access iterator that fails to meet that requirement is by definition not a valid random access iterator.

### C.2.5 Output Iterators [diff.n3351.output\_iters]

- <sup>1</sup> The Palo Alto report does not define concepts for output iterators, making do with `WeaklyIncrementable`, `Writable`, and (where needed) `EqualityComparable`. The author of this document sees little downside to grouping these into the familiar `OutputIterator` concept. Even if not strictly needed, its absence would be surprising.

### C.2.6 No Algorithm Reformulations [diff.n3351.no\_eop\_algos]

- <sup>1</sup> Between the standardization of the Standard Library and the Palo Alto report, much new research was done to further generalize the standard algorithms (see “Element of Programming”, Stepanov, McJones [3]). The algorithms presented in The Palo Alto report reflect the results of that research in the algorithm constraints, some of which (e.g., `sort`, `inplace_merge`) take iterators with weaker categories than they do in the current standard. The design presented in this document does not reflect those changes. Although those changes are desirable, generalizing the algorithms as described in The Palo Alto report feels like it would be best done in a separate proposal.

# Bibliography

- [1] Adobe source libraries. <http://stlab.adobe.com>. Accessed: 2014-10-8.
- [2] Eric Niebler. Range-v3. <https://github.com/ericniebler/range-v3>. Accessed: 2015-4-6.
- [3] Alexander Stepanov and Paul McJones. *Elements of Programming*. Addison-Wesley Professional, 1st edition, 2009.

# Index

- x C++ Standard, [2](#)
- “The Palo Alto”, [2](#)
- argument, [9](#)
- class
  - base, [9](#)
- Concepts TS, [2](#)
- constant iterator, [41](#)
- conventions, [8](#)
- function
  - virtual member, [9](#)
- library
  - Ranges, [6, 9](#)
- multi-pass guarantee, [46](#)
- mutable iterator, [41](#)
- namespace, [9](#)
- requirements, [7](#)
  - iterator, [40](#)
  - uniform random number generator, [167](#)
- restriction, [9, 10](#)
- statement
  - iteration, [5](#)
- swappable, [15](#)
- swappable with, [15](#)
- undefined behavior, [100](#)
- uniform random number generator
  - requirements, [167](#)
- unspecified, [153](#)

## Index of library names

adjacent\_find, 136  
 advance, 67, 94  
 all\_of, 134  
 any\_of, 134  
 Assignable, 14  
  
 back\_insert\_iterator, 73  
     back\_insert\_iterator, 74  
     constructor, 74  
 back\_inserter, 74  
 base  
     counted\_iterator, 91  
     move\_iterator, 80  
     reverse\_iterator, 70  
 bidirectional\_iterator\_tag, 66  
 BidirectionalIterator, 46  
 binary\_search, 156  
 Boolean, 16  
  
 Common, 13  
 common\_iterator, 84  
     common\_iterator, 85  
     constructor, 86  
     destructor, 86  
     operator!=, 88  
     operator\*, 86  
     operator++, 87  
     operator-, 88  
     operator->, 86  
     operator=, 86  
     operator==, 87  
 Constructible, 19  
 ConvertibleTo, 13  
 copy, 140  
 copy\_backward, 141  
 copy\_n, 141  
 Copyable, 21  
 CopyConstructible, 20  
 count, 137  
     counted\_iterator, 91  
 count\_if, 137  
 counted\_iterator, 89  
     base, 91  
     constructor, 91  
     count, 91  
     counted\_iterator, 90  
     operator!=, 93  
     operator\*, 91  
     operator+, 92, 94  
     operator++, 91  
     operator+=, 92  
     operator-, 92, 94  
     operator-=, 92  
     operator--, 92  
     operator<, 93  
     operator<=, 93  
     operator=, 91  
     operator==, 93  
     operator>, 94  
     operator>=, 94  
     operator[], 93  
  
 dangling, 95  
     dangling, 95  
     get\_unsafe, 95  
 default\_sentinel, 88  
 DefaultConstructible, 20  
 DerivedFrom, 13  
 Destructible, 19  
 difference\_type, 61  
 difference\_type\_t, 61  
 distance, 67  
 distance(R&& r), 110  
  
 empty, 66  
 equal, 138  
     istreambuf\_iterator, 102  
 equal\_range, 155  
 equal\_to, 27  
 equal\_to<>, 28  
 EqualityComparable, 17  
 <experimental/ranges/algorithm>, 113  
 <experimental/ranges/iterator>, 52  
 <experimental/ranges/utility>, 24  
  
 failed  
     ostreambuf\_iterator, 104  
 fill, 145  
 fill\_n, 145  
 find, 135  
 find\_end, 135  
 find\_first\_of, 136

[find\\_if](#), 135  
[find\\_if\\_not](#), 135  
[for\\_each](#), 134  
[forward\\_iterator\\_tag](#), 66  
[ForwardIterator](#), 46  
[front\\_insert\\_iterator](#), 75  
     [constructor](#), 75  
     [front\\_insert\\_iterator](#), 75  
[front\\_inserter](#), 76  
  
[generate](#), 146  
[generate\\_n](#), 146  
[get\\_unsafe](#)  
     [dangling](#), 95  
[greater](#), 27  
[greater<>](#), 28  
[greater\\_equal](#), 28  
[greater\\_equal<>](#), 29  
  
[identity](#), 29  
[includes](#), 157  
[Incrementable](#), 44  
[indirect\\_result\\_of](#), 48  
[IndirectInvocable](#), 48  
[IndirectlyComparable](#), 51  
[IndirectlyCopyable](#), 51  
[IndirectlyCopyableStorable](#), 51  
[IndirectlyMovable](#), 50  
[IndirectlyMovableStorable](#), 50  
[IndirectlySwappable](#), 51  
[IndirectPredicate](#), 48  
[IndirectRegularInvocable](#), 48  
[IndirectRelation](#), 48  
[IndirectStrictWeakOrder](#), 48  
[inplace\\_merge](#), 157  
[input\\_iterator\\_tag](#), 66  
[InputIterator](#), 45  
[insert\\_iterator](#), 76  
     [constructor](#), 76  
     [insert\\_iterator](#), 76  
[inserter](#), 77  
[Integral](#), 14  
[Invocable](#), 21  
[is\\_heap](#), 161  
[is\\_heap\\_until](#), 161  
[is\\_nothrow\\_swappable](#), 32  
[is\\_nothrow\\_swappable\\_with](#), 31  
[is\\_partitioned](#), 150  
[is\\_permutation](#), 139  
[is\\_sorted](#), 153  
[is\\_sorted\\_until](#), 154  
  
[is\\_swappable](#), 31  
[is\\_swappable\\_with](#), 31  
[istream\\_iterator](#), 96  
     [constructor](#), 98  
     [destructor](#), 98  
     [operator!=](#), 99  
     [operator\\*](#), 98  
     [operator++](#), 98  
     [operator->](#), 98  
     [operator==](#), 98  
[istreambuf\\_iterator](#), 100  
     [constructor](#), 102  
     [operator++](#), 102  
[Iterator](#), 44  
[iterator\\_category](#), 62  
[iterator\\_category\\_t](#), 62  
[iterator\\_traits](#), 63  
  
[less](#), 28  
[less<>](#), 29  
[less\\_equal](#), 28  
[less\\_equal<>](#), 29  
[lexicographical\\_compare](#), 164  
[lower\\_bound](#), 154  
  
[make\\_counted\\_iterator](#), 94  
[make\\_heap](#), 161  
[make\\_move\\_iterator](#), 82  
[make\\_move\\_sentinel](#), 84  
[make\\_reverse\\_iterator](#), 73  
[make\\_tagged\\_pair](#), 37  
[make\\_tagged\\_tuple](#), 38  
[max](#), 162  
[max\\_element](#), 163  
[merge](#), 156  
[Mergeable](#), 52  
[min](#), 162  
[min\\_element](#), 163  
[minmax](#), 162, 163  
[minmax\\_element](#), 164  
[mismatch](#), 137  
[Movable](#), 21  
[movemove](#), 142  
[move\\_backward](#), 142  
[move\\_iterator](#), 78  
     [base](#), 80  
     [constructor](#), 79  
     [move\\_iterator](#), 79  
     [operator!=](#), 81  
     [operator\\*](#), 80  
     [operator+](#), 80, 82

operator++, 80  
 operator+==, 81  
 operator-, 81, 82  
 operator--=, 81  
 operator-- , 80  
 operator<, 81  
 operator<=, 81  
 operator=, 80  
 operator==, 81  
 operator>, 81  
 operator>=, 82  
 operator[], 81  
 move\_sentinel, 82  
   constructor, 83  
   move\_sentinel, 83  
   operator!=, 83  
   operator-, 84  
   operator=, 83  
   operator==, 83  
 MoveConstructible, 20  
  
 next, 67  
 next\_permutation, 164  
 none\_of, 134  
 not\_equal\_to, 27  
 not\_equal\_to<>, 28  
 nth\_element, 154  
  
 operator!=  
   common\_iterator, 88  
   counted\_iterator, 93  
   istream\_iterator, 99  
   istreambuf\_iterator, 103  
   move\_iterator, 81  
   move\_sentinel, 83  
   reverse\_iterator, 72  
   unreachable, 96  
 operator\*  
   back\_insert\_iterator, 74  
   common\_iterator, 86  
   counted\_iterator, 91  
   front\_insert\_iterator, 75  
   insert\_iterator, 77  
   istream\_iterator, 98  
   istreambuf\_iterator, 102  
   move\_iterator, 80  
   ostream\_iterator, 100  
   ostreambuf\_iterator, 104  
   reverse\_iterator, 70  
 operator+  
   counted\_iterator, 92, 94  
  
   move\_iterator, 81, 82  
   move\_sentinel, 84  
   reverse\_iterator, 71, 73  
  
   counted\_iterator, 92  
   move\_iterator, 81  
   reverse\_iterator, 71  
  
   common\_iterator, 88  
   counted\_iterator, 92, 94  
   move\_iterator, 81, 82  
   move\_sentinel, 84  
   reverse\_iterator, 71, 73  
  
   counted\_iterator, 92  
   move\_iterator, 81  
   reverse\_iterator, 71  
  
   common\_iterator, 86  
   istream\_iterator, 98  
   reverse\_iterator, 70  
  
   counted\_iterator, 92  
   move\_iterator, 80  
   reverse\_iterator, 71  
  
   counted\_iterator, 93  
   move\_iterator, 81  
   reverse\_iterator, 72  
  
   counted\_iterator, 93  
   move\_iterator, 81  
   reverse\_iterator, 72  
  
   reverse\_iterator, 70  
   back\_insert\_iterator, 74  
   common\_iterator, 86  
   counted\_iterator, 91  
   front\_insert\_iterator, 75  
   insert\_iterator, 76, 77  
  
   move\_iterator, 80, 82  
   reverse\_iterator, 71, 73  
  
   back\_insert\_iterator, 74  
   common\_iterator, 87  
   counted\_iterator, 91  
   front\_insert\_iterator, 76  
   insert\_iterator, 77  
   istream\_iterator, 98  
   istreambuf\_iterator, 102  
   move\_iterator, 80  
   ostream\_iterator, 100  
   ostreambuf\_iterator, 104  
   reverse\_iterator, 70  
  
   counted\_iterator, 92  
   move\_iterator, 81  
   reverse\_iterator, 71  
  
   common\_iterator, 88  
   counted\_iterator, 92, 94  
   move\_iterator, 81, 82  
   move\_sentinel, 84  
   reverse\_iterator, 71, 73  
  
   counted\_iterator, 92  
   move\_iterator, 81  
   reverse\_iterator, 71  
  
   common\_iterator, 86  
   istream\_iterator, 98  
   reverse\_iterator, 70  
  
   counted\_iterator, 92  
   move\_iterator, 80  
   reverse\_iterator, 71  
  
   counted\_iterator, 93  
   move\_iterator, 81  
   reverse\_iterator, 72  
  
   counted\_iterator, 93  
   move\_iterator, 81  
   reverse\_iterator, 72  
  
   reverse\_iterator, 70  
   back\_insert\_iterator, 74  
   common\_iterator, 86  
   counted\_iterator, 91  
   front\_insert\_iterator, 75  
   insert\_iterator, 76, 77

- move\_iterator, 80
- move\_sentinel, 83
- ostream\_iterator, 100
- ostreambuf\_iterator, 104
- tagged, 36
- operator==
  - common\_iterator, 87
  - counted\_iterator, 93
  - istream\_iterator, 98
  - istreambuf\_iterator, 102
  - move\_iterator, 81
  - move\_sentinel, 83
  - reverse\_iterator, 72
  - unreachable, 96
- operator>
  - counted\_iterator, 94
  - move\_iterator, 81
  - reverse\_iterator, 72
- operator>=
  - counted\_iterator, 94
  - move\_iterator, 82
  - reverse\_iterator, 72
- operator[]
  - counted\_iterator, 93
  - move\_iterator, 81
  - reverse\_iterator, 71
- ostream\_iterator, 99
  - constructor, 100
  - destructor, 100
  - operator\*, 100
  - operator++, 100
  - operator=, 100
- ostreambuf\_iterator, 103
  - constructor, 103, 104
- output\_iterator\_tag, 66
- OutputIterator, 46
  
- partial\_sort, 153
- partial\_sort\_copy, 153
- partition, 150
- partition\_copy, 151
- partition\_point, 151
- Permutable, 52
- pop\_heap, 160
- Predicate, 22
- prev, 68
- prev\_permutation, 165
- projected, 50
- proxy
  - istreambuf\_iterator, 101
- push\_heap, 160
  
- random\_access\_iterator\_tag, 66
- RandomAccessIterator, 47
- Readable, 41
- Regular, 21
- RegularInvocable, 22
- Relation, 22
- remove, 146
- remove\_copy, 147
- remove\_copy\_if, 147
- remove\_if, 146
- replace, 144
- replace\_copy, 145
- replace\_copy\_if, 145
- replace\_if, 144
- reverse, 148
- reverse\_copy, 148
- reverse\_iterator, 68
  - reverse\_iterator, 70
  - base, 70
  - constructor, 70
  - make\_reverse\_iterator non-member function, 73
  - operator++, 70
  - operator--, 71
- rotate, 149
- rotate\_copy, 149
- rvalue\_reference\_t, 62
  
- Same, 12
- search, 139
- search\_n, 140
- Semiregular, 21
- Sentinel, 44
- set\_difference, 159
- set\_intersection, 158
- set\_symmetric\_difference, 159
- set\_union, 158
- shuffle, 150
- SignedIntegral, 14
- SizedSentinel, 45
- sort, 152
- sort\_heap, 161
- Sortable, 52
- stable\_partition, 151
- stable\_sort, 152
- StrictTotallyOrdered, 18
- swap, 25
  - tagged, 37
  - tagged, 36
- swap\_ranges, 142
- Swappable, 15



- tagged, [34](#)
  - operator=, [36](#)
  - swap, [36](#)
  - tagged, [36](#)
- tagged\_tuple
  - make\_tagged\_tuple, [38](#)
- transform, [143](#)
- tuple\_element, [37](#)
- tuple\_size, [37](#)
  
- unique, [147](#)
- unique\_copy, [148](#)
- unreachable, [95](#)
  - operator!=, [96](#)
  - operator==, [96](#)
- UnsignedIntegral, [14](#)
- upper\_bound, [155](#)
  
- value\_type\_t, [42](#)
  
- WeaklyEqualityComparable, [17](#)
- WeaklyIncrementable, [43](#)
- Writable, [43](#)